

## Special Use Tapes

## Scotch® Thread Sealant and Lubricant 48

Scotch® Thread Sealant Tape 48 is a high temperature stable (PTFE) pipe thread sealant that provides a leakproof seal.

Adhesive Material	None
Backing Material	PTFE Fluorocarbon Resin
Tape Grade	Premium
Tape Type	Special Use
Operating Temperature Range	-450–500°F (-268–260°C)
RoHS 2011/65/EU	Yes



Country of Origin




Order No.	UPC	Color	Length	Width	Thickness	Breaking Strength	Rolls per Case
48-1/2"X1296"	054007-27571	White	32.9 m	0.50"	3 mil	5.9 lbs/in	12
48-1/2"X260"	054007-06195	White	6.6 m	0.50"	3 mil	5.9 lbs/in	12
48-1/2"X520"	054007-06196	White	13.2 m	0.50"	3 mil	5.9 lbs/in	12
48-1/4"X260"	054007-06192	White	6.6 m	0.25"	3 mil	5.9 lbs/in	12

## Scotch® High Performing Masking Tape 232

Scotch® Performance Masking Tape 232 is a tough and extremely smooth, natural-colored, 6.3 mil (0.14 mm) thick, high performance, crepe paper tape. It is excellent for paint masking as well as many industrial applications. Scotch® Masking Tape 232 will generally function during bake cycles of up to 250°F (121°C) for periods up to one hour. It should not be exposed to outdoor elements. It can be qualified to meet Fed. Spec. PPP-T-42C, Type I and CID A-A-883B.

Adhesive Material	Rubber
Backing Material	Crepe Paper
Tape Grade	Premium
Tape Type	Special Use
Maximum Operating Temperature	250°F (121°C)
RoHS 2011/65/EU	Yes

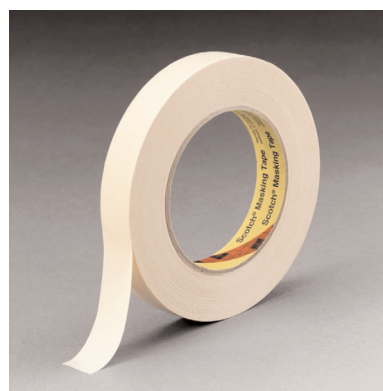

Order No.	UPC	Color	Length	Width	Thickness	Elongation	Breaking Strength	Adhesion to Steel	Rolls per Case
232-18MM-55M	021200-02853	Tan	55 m	18 mm	6.3 mil	8%	27 lbs/in (472 N/100 mm)	41 oz/in (44 N/100 mm)	48
232-24MM-55M	021200-02854	Tan	55 m	24 mm	6.3 mil	8%	27 lbs/in (472 N/100 mm)	41 oz/in (44 N/100 mm)	36
232-48MM-55M	021200-04240	Tan	55 m	48 mm	6.3 mil	8%	27 lbs/in (472 N/100 mm)	41 oz/in (44 N/100 mm)	24