

Dual-rated mechanical connectors

Type ASL – ALCÜL two-conductor, one-hole mount

and Type ASL – ALCÜL™ two-, and three-conductor, two-hole mount




Type ASL – ALCÜL two-conductor, one-hole mount



	Cat. no.	Conductor range (AWG or kcmil, Al or Cu)		Dimensions (in.)					Mtg. hole dia.
		Max.	Min.	L	W	H	D	F	
Diagrams	ASL30-21	300	6 Str.	3	1⅞	2	15⁄32	1⁄2	5⁄16

Diagrams



ASL30-21

300

6 Str.

3

1 1/8

2

15/32

1/2

5/16




Type ASL – ALCÜL two-conductor, two-hole mount



	Cat. no.	Conductor range (AWG or kcmil, Al or Cu)		Dimensions (in.)					
		Max.	Min.	L	W	H	D	F	

Diagrams

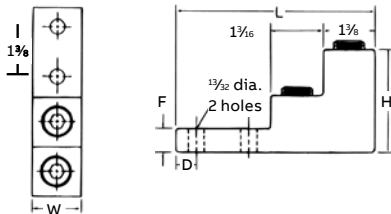

ASL60-22

600

2 Str.

4²⁹/₃₂

1 1/2

3

3/4

3/8

ASL75-22

750

3/0 Str.

4²⁹/₃₂

1 1/2

3

3/4

3/8

UL® 486B
AL9CU




Type ASL – ALCÜL three-conductor, two-hole mount



	Cat. no.	Conductor range (AWG or kcmil, Al or Cu)		Dimensions (in.)					
		Max.	Min.	L	W	H	D	F	I

Diagrams

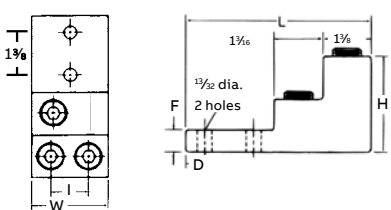

ASL60-32

600

2 Str.

4²⁹/₃₂

2 1/2

3

3/4

3/8

1 7/32

ASL75-32

750

3/0 Str.

4²⁹/₃₂

2 27/21

3

3/4

3/8

1 5/16