


## Ty-Duct® Wiring Duct


Perfect for passenger or crew areas where smoke toxicity is a concern!

### Halogen-Free Wide Slot Wiring Duct

- Halogen-free construction — RoHS Compliant
- Higher temperature rating than standard PVC material (203° F/95° C)
- UL94V-1 flammability rating
- Wide fingers and slots increase rigidity and enable for insertion of bundles
- Non-slip cover does not slide easily and resists vibration
- Dual score lines are designed to yield clean breakoffs at the base of the slot and the duct
- V-shaped slot lead-in enables easier and faster wire installation

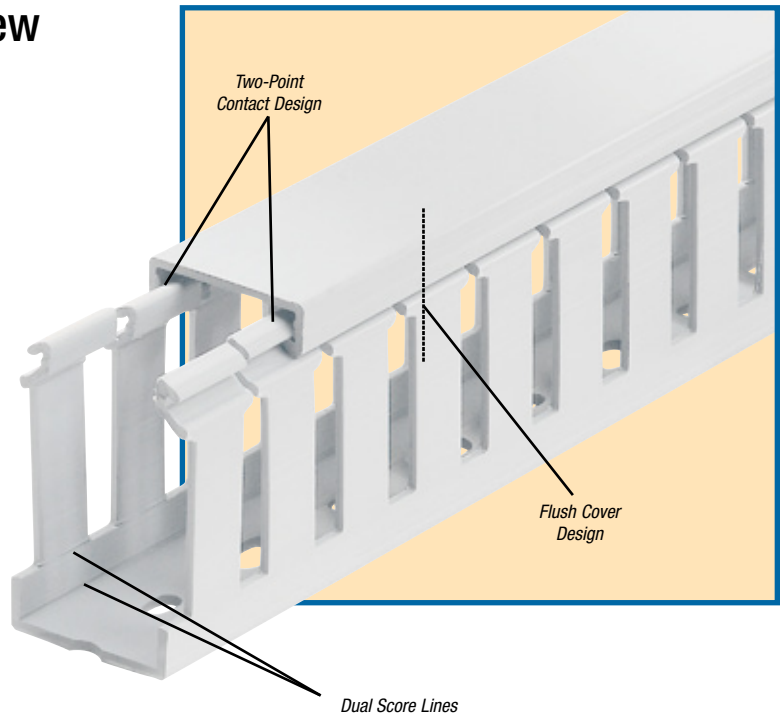

- Light weight
- Typical applications include rail/mass transit/subway cars, shops and offshore oil and gas platforms

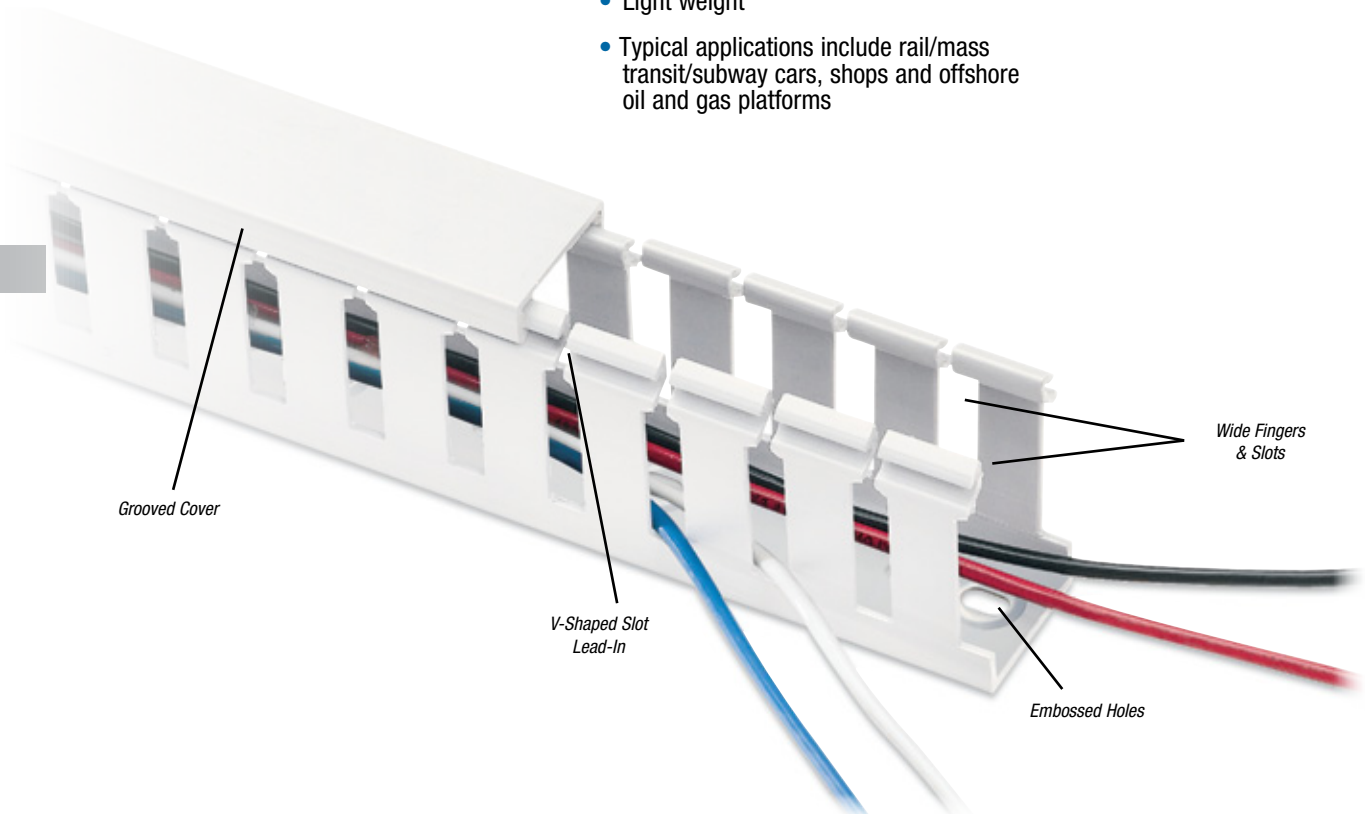

## Wiring Duct Tools and Accessories

Create multiple channels inside wiring ducts!

### Divider Wall

- Separates high and low voltage to reduce shortages and interference
- Mount inside any Ty-Duct® PVC wiring duct using Universal Mounting Clips
- Solid and Wide Slotted style



CAT. NO.	DESCRIPTION	LENGTH (FT.)	STD. CTN. QTY.
TY1D[_]P[_]6	1" High Wall Divider	6	120
TY1.5D[_]P[_]6	1.5" High Wall Divider	6	120
TY2D[_]P[_]6	2" High Wall Divider	6	120
TY3D[_]P[_]6	3" High Wall Divider	6	120
TY4D[_]P[_]6	4" High Wall Divider	6	120
TY5D[_]P[_]6	5" High Wall Divider	6	120

+Catalog number must be completed first by adding S for Solid divider or W for Wide Finger Slotted divider and then by adding G for Gray, W for White.

**Examples:** TY2DSPG6 is a 2" high solid wall gray divider.  
TY2DWPG6 is a 2" high slotted gray divider.

One size fits all!

### Universal Mounting Clips

- Added before or after the duct is in place, without additional hardware
- Twists into place — holds securely
- Installs easily using a screwdriver
- Accommodates up to 40 lb. cable ties
- Black polycarbonate
- For ½" and wider wiring duct sizes



CAT. NO.	DESCRIPTION	QTY.
UMC	Universal Fastener Mount	100 pk