

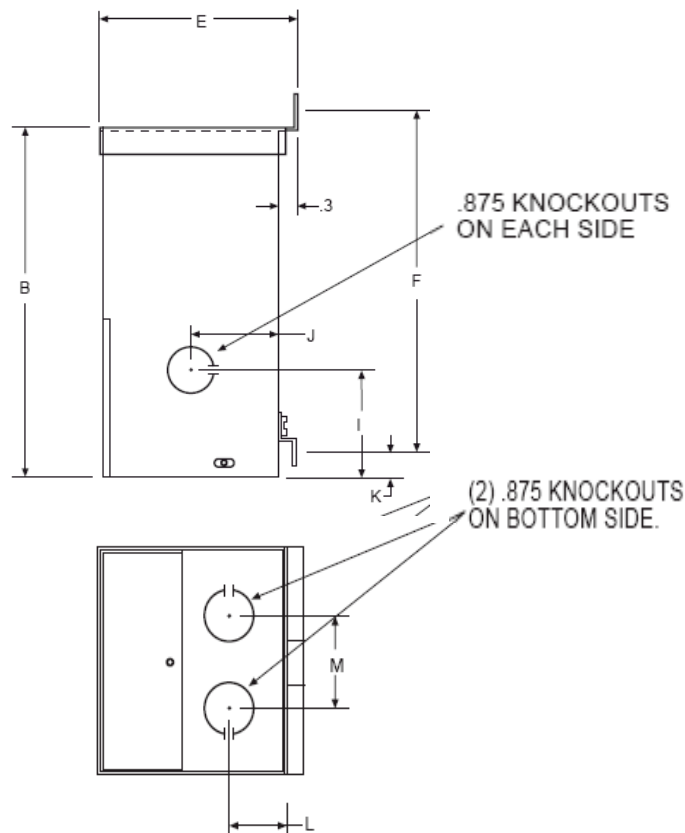


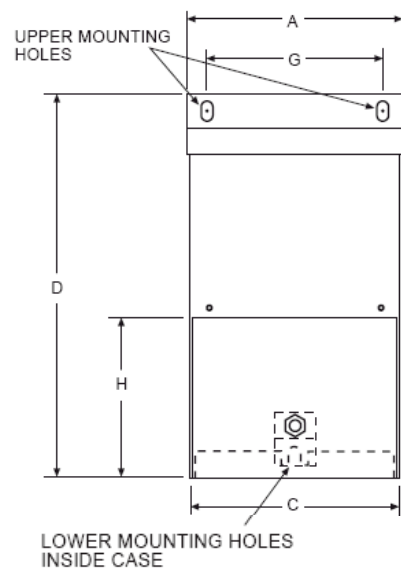

1. MOUNT WITH #10 HARDWARE.



Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
480	H1-H4	H2 to H3	
240	H1-H3 & H2-H4		
Secondary Volts			
240		X2 to X3	X1-X4
120/240		X2 to X3	X1-X2-X4
120		X1 to X3 X2 to X4	X1-X4

KVA	CATALOG NUMBER	VOLTAGE		Enclosure	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
.15	T-1-53006	240x480	120/240	NEMA 2D	7 Lbs	1 ϕ	50/60 Hz

Winding Rise	80°C	TYPICAL PERFORMANCE DATA										Typical Efficiency	
Insulation	130°C	Regulation @ 100% PF				IMPEDANCE				Full Load Losses			
Sound Level	40 dB											No Load Losses	
KVA	A	B	C	D	E	F	G	H	I	J	K	L	M
.050	3.25	5.79	3.14	6.41	3.05	5.63	2.50	2.75	2.04	1.36	.48	1.03	1.53
.100-150	4.00	6.54	3.89	7.16	3.67	6.38	3.25	2.75	2.04	1.67	.48	1.03	1.53

ACME ELECTRIC

Type No.

A

PRINTS TO

CONTROL
7