

# EFD/EFDB and EDS Series Factory Sealed Control Stations

## Explosionproof, Dust-Ignitionproof

### NEC:

Class I, Division 1 and 2, Groups B+, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
NEMA 3, 7CD, 9EFG

### Applications

- Push buttons and selector switches are used in conjunction with contactors or magnetic starters for remote control of motors. They provide circuit control and/or selection.
- Pilot lights provide visual assurance that an electrical function is being performed at a remote or local location.
- EFD/EFDB and EDS factory sealed control stations confine arcing of device within the enclosure, preventing ignition of ignitable atmospheres during control operation of motors and other equipment.
- Used in classified areas where flammable vapors, gases or highly combustible dusts are present.
- For installation in chemical and petrochemical plants, refineries, and other process industries.

### Features

- EFD/EFDB Push Buttons and Selector Switches
  - Eliminate need for adding sealing fittings and compound at each conduit entrance.
  - Heavy-duty push buttons, 10 Amp, 600 Vac rated.
  - Dozens of possible combinations of push buttons, pilot lights and selector switches.
  - Smooth, rounded integral bushing in each EFD/EFDB hub protects conductor insulation.
  - Accurately tapped, tapered hubs for tight, rigid joints and ground continuity.
  - Stainless steel push button shaft operates within stainless steel bushing assuring long, maintenance free operation.
  - Push button and selector switch contacts are silver cadmium oxide which are "sealed" in lower phenolic chamber isolated from corrosive elements. Assures positive contact and long, trouble-free operation.
  - Enclosed stainless steel helper spring prevents accidental operation of push button in severe vibration installations.
  - Push button models also available with dust cap for use in areas where excessive dust, moisture or corrosive conditions are encountered.
  - Corrosion resistant captive stainless steel hex head cap screws hold EFKB covers to body.
  - All EFD/EFDB momentary push buttons are supplied with lockout type guards as standard. Hole in guard will accept locks with up to 1/4" hasp. Permits locking of push button to prevent unauthorized operation.
  - Clearly marked terminals with brass screws assure quick, easy wiring.
- EFD/EFDB Pilot Lights
  - Factory sealed pilot lights supplied with red jewel/guard assembly and 120 Vac/Vdc, 50/60 Hz, 6 Watt, Type 6S6 lamp.
  - Models also available in combination with factory sealed push buttons and selector switches.
- EFD/EFDB Selector Switches
  - Factory sealed selector switches furnished with nylon cam-operated, heavy-duty push buttons for either 2-position or 3-position maintained contact operation.
  - High thermal and arc resistance, high dielectric strength.
- EDS Push Buttons
  - Factory sealed — eliminates need for adding sealing fittings and compound at each conduit entrance.
  - Heavy duty, 10 Amp, 600 Vac.
  - Switch is enclosed in separate sealing chamber.



EFDB Push Button



EFDB Photocontrol



EDS Rocker Arm Push Button



EFDB Push Button with Dust Cap



EFD Combination Pilot Light and Push Buttons



EFDB Pilot Light



EFDB Selector Switch



EFDB Maintained Push Button

- Sealing chamber has smooth, double flanges that mate both to cover and mounting enclosure to provide flame-tight joints.
- Pigtail leads from push buttons are factory sealed in sealing well.
- Stainless steel hex head screws attach sealing chamber to cover and mounting enclosure.
- Side rocker arm push button has lockout holes.
- EFD/EFDB backbox supplied with internal ground screw.

### Standard Materials

- EFDB control stations: malleable iron body with copperfree (4/10 of 1% max.) aluminum cover
- SPBB push button: copperfree (4/10 of 1% max.) aluminum upper barrel and phenolic lower barrel with nylon plastic button (dust cap models have neoprene buttons)
- SPLN/SPLS pilot light: copperfree (4/10 of 1% max.) aluminum guard and body assembly; steel clamping ring; and tempered glass jewel
- SSBA selector switch: copperfree (4/10 of 1% max.) aluminum operator mechanism, nylon cam, and sealed phenolic contact block
- EDS control stations: malleable iron body and cover; copperfree (4/10 of 1% max.) aluminum sealing chamber; and nylon operating handle

### Standard Finishes

♦ Select items suitable for Class I, Division 1 and 2, Groups B, C and D; Class II, Groups E, F and G and Class III. See product selection pages for suitable items.

# EFD/EFDB and EDS Series Factory Sealed Control Stations

## Explosionproof, Dust-Ignitionproof

### NEC:

Class I, Division 1 and 2, Groups B<sup>+</sup>, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7CD, 9EFG

- EFD/EFDB control stations: body, triple-coat—(1) zinc electroplate, (2) chromate, and (3) epoxy powder coat
- SPBB push button, SPLN/SPLS pilot light and SSBA selector switch: natural finish
- EDS control stations: body and cover: triple-coat—(1) zinc electroplate, (2) chromate, and (3) epoxy powder coat sealing chamber, natural finish

### Options

- 1- or 2-gang copperfree (4/10 of 1% max.) aluminum bodies and covers available. Add suffix — **A**.
- Three position selector switches with modified operation.
  - Momentary contact right position, spring return to center, maintained contact left position. Add suffix — **SRC**.
  - Momentary contact left position, spring return to center, maintained contact right position. Add suffix — **SLC**.
  - Alternate contacts add suffix — **ALT**.
- EFD/EFDB selector switch lockout locks two or three position handle in any position. Add suffix — **LD**.
- Push button front operated mushroom head (momentary contact): Order by suffixes for desired color as follows:
  - Red — **NMRBRE**
  - Green — **NMRBGR**
  - Black — **NMRBBL**
- EFD/EFDB pilot light jewel/guard assembly. Order by suffixes if color desired is other than red, as follows:
  - Amber — **JGBA**
  - Blue — **JGBB**
  - Clear — **JGBC**
  - Green — **JGBG**
  - Opal — **JGBO**
- For colored LED jewel/guard assembly, order by suffixes:
  - Red — **LEDR**
  - Green — **LEDG**
  - Amber — **LEDA**
- EFD/EFDB pilot light transformers for single pilot light per gang. Order by suffix:

Primary Voltage	Lamp Voltage	Suffix
220	120	— <b>TR-2</b>
277	120	— <b>TR-3</b>
440	120	— <b>TR-4</b>
550	120	— <b>TR-5</b>

- EFD and EDS units may be supplied with brazed hubs as 3-, 4-, and 5-gang in a variety of hub configurations. See Ordering Information page for how to order these and other "custom" units by adding suffixes to mounting body catalog numbers.
- Securing Rod for EFD/EFDB Push Button Lockout Guard. Add suffix — **SR**.
- NPBRKT** Nameplate Mounting Bracket to make circuit description/identification easy.
  - Pre-drilled holes in bottom of bracket allow direct mounting to control stations with existing cover bolts.
  - Pre-drilled holes in middle of bracket allow mounting of customer's circuit identification nameplate; epoxy glue may also be used for mounting (phenolic nameplate not included).
  - Bracket eliminates costly field installation of drilling and tapping to accommodate circuit identification nameplate.
  - Brackets fit side-by-side on 2-, 3- and 4-gang boxes and 3-devices.

### NEC Certifications and Compliances

- UL Standards: UL 508, UL 698, UL 1203
- UL Listed: E10449, E81751

### Related Products

- For Hazardous Location Photocontrols, see *Lighting Section*.

### Illustrated Features



EDS factory sealed rocker arm push button control station — shows separate sealing chamber and device construction. Rocker arm has holes for lock.

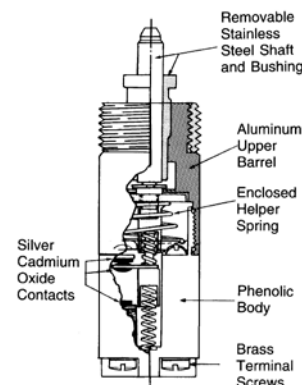


Securing Rod for EFD/EFDB Push Button Lockout Guard — available as an optional item as catalog number NBL-SR (single guard only) or add Suffix — SR to push button catalog number. Lockout Guard, furnished as standard with the EFD/EFDB push button, may also be padlocked.



SPBB factory sealed push button used in EFD/EFDB Series — standard type and unit with dust cap.

### SPBB Design Features



♦ Select items suitable for Class I, Division 1 and 2, Groups B, C and D; Class II, Groups E, F and G and Class III. See product selection pages for suitable items.

# EFD/EFDB and EDS Series Factory Sealed Control Stations

Explosionproof, Dust-Ignitionproof

## NEC:

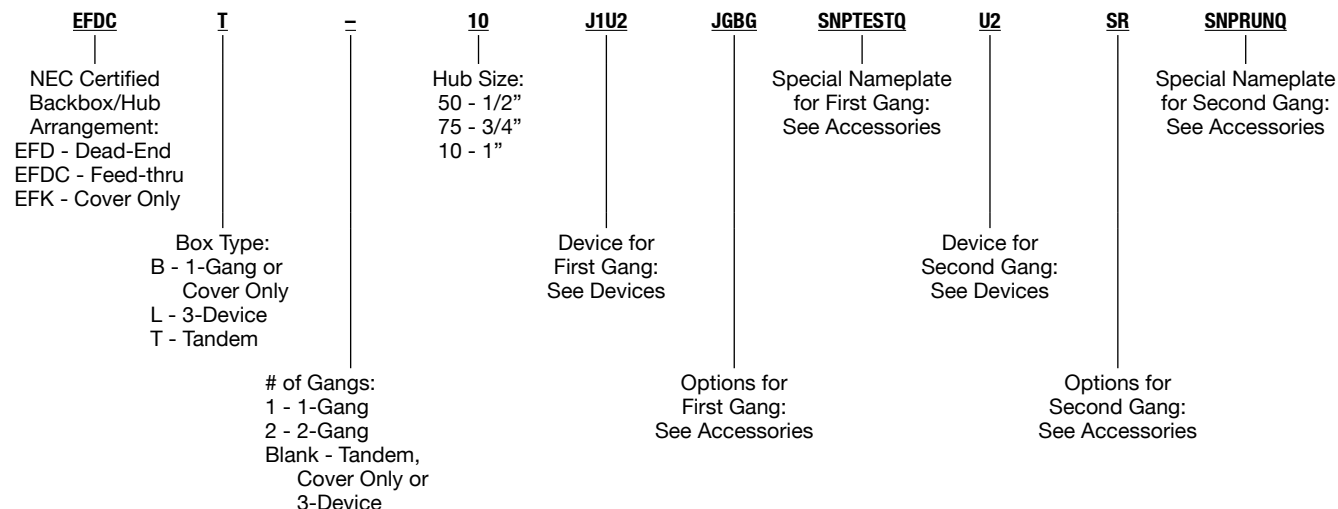
Class I, Division 1 and 2, Groups B+, C, D

Class II, Division 1 and 2, Groups E, F, G

Class III

NEMA 3, 7C, 9EFG

## Catalog Numbering Guide



## Full Catalog # EFDCT10-J1U2-JGBG-SNPTESTQ-U2-SNPTESTQ-SNPRUNQ

Feed-Thru Tandem Box with 1" Hubs.

In Gang #1: 2 Momentary Push Buttons and a Green Pilot Light.

In Gang #2: 2 Momentary Push Buttons with One Securing Rod.

With Special "Test" and "Run" Push Button Nameplates.

## Options

Options Description	Suffix
Momentary Push Button Securing Rod	SR
Selector Switch Lockout	LD
Spring Return From Right Selector Switch (3 Positions Only)	SRC
Spring Return From Left Selector Switch (3 Positions Only)	SLC
Alternate Contacts Selector Switch	ALT
Change One Red Lens to Green Lens	JGBG
Change One Red Lens to Opal Lens	JGBO
Change One Red Lens to Amber Lens	JGBA
Change One Red Lens to Blue Lens	JGBB
Change One Red Lens to Clear Lens	JGBC
Add 220/120 Vac Transformer (J1 Device Only)	TR2
Add 277/120 Vac Transformer (J1 Device Only)	TR3
Add 440/120 Vac Transformer (J1 Device Only)	TR4
Add 550/120 Vac Transformer (J1 Device Only)	TR5
Change One Red Pilot to Red LED	LEDR
Change One Red Lens to Green LED	LEDG
Change One Red Lens to Amber LED	LEDA
Add Red Mushroom Head to Momentary Push Button	NMRBRE
Add Black Mushroom Head to Momentary Push Button	NMRBBL
Add Green Mushroom Head to Momentary Push Button	NMRBGR
Locking Guard for Maintained Push Button	SMPBLG

♦ Select items suitable for Class I, Division 1 and 2, Groups B, C and D; Class II, Groups E, F and G and Class III. See product selection pages for suitable items.













# EFD/EFDB Series Factory Sealed Control Stations

## Explosionproof, Dust-Ignitionproof

10 Amp, 600 Vac Max. for Heavy Duty Use. Furnished with Internal Ground Screw.

### NEC:

Class I, Division 1, Groups B, C, D  
Class I, Division 2, Groups B, C, D  
Class II, Division 1 and 2, Groups E, F, G  
Class III  
NEMA 3, 7CD, 9EFG

	Hub Size (Inches)	Description	Nameplate Marking	Catalog Number Dead-End      Feed-Thru		
1-Gang ♦ ① — Momentary Contact						
	1/2	1 Circuit Universal		Start/Stop	EFDB150-U1	EFDCB150-U1
	3/4				EFDB175-U1	EFDCB175-U1
	1				EFDB110-U1	EFDCB110-U1
	1/2	2 Circuits Universal		Start/Stop	EFDB150-U2	EFDCB150-U2
	3/4				EFDB175-U2	EFDCB175-U2
	1				EFDB110-U2	EFDCB110-U2
1-Gang ♦ ① — Red Mushroom Head — Maintained Contact – Emergency Stop Nameplate						
	1/2	1 Circuit Universal		Emergency Stop	EFDB150-UM1	EFDCB150-UM1
	3/4				EFDB175-UM1	EFDCB175-UM1
	1				EFDB110-UM1	EFDCB110-UM1
2-Gang ① — Momentary Contact						
	1/2	2 Circuits Universal		Start/Stop	EFD250-U1	EFDC250-U1
	3/4				EFD275-U1	EFDC275-U1
	1				EFD210-U1	EFDC210-U1
	1/2	4 Circuits Universal		Start/Stop	EFD250-U2	EFDC250-U2
	3/4				EFD275-U2	EFDC275-U2
	1				EFD210-U2	EFDC210-U2
3-Device ② — Momentary Contact						
	1/2	3 Circuits Universal		Start/Stop	EFDL50-U3	EFDC50-U3
	3/4				EFDL75-U3	EFDC75-U3
	1				EFDL10-U3	EFDC10-U3

① Malleable iron body and aluminum cover. For aluminum body, add suffix —A.

② Aluminum body not available.

♦ Shaded area indicates items suitable for Class I, Division 1 and 2, Groups B, C and D; Class II, Groups E, F and G and Class III.  
For Class I, Division 1, Group B, external seals must be installed at each conduit entrance.

Appleton®

CONTROLS: NEC/CEC EXPLOSIONPROOF CONTROL STATIONS AND SWITCHES