



| | |
|-----------------|-------|
| CATALOG NUMBER: | |
| JOB NAME: | |
| CUSTOMER NAME: | |
| NOTES: | TYPE: |
| | DATE: |

FEATURES AND SPECIFICATIONS

FLUORESCENT INDUSTRIAL LIGHTING

RFS SERIES STRIP RETROFIT KITS

Optics:

- Convert F96 Lamps to F32 or F54 Lamps
- Two Lamp Option
- Relamp 1' x 8' Fixtures

Electrical:

- Toolless Ballast Access
- Prewired for Faster Installation
- ≥ 20kHz
- PF > .9
- THD < 20%
- See other side for component detail

Specifications:

- Width: 5.65" (14.35 cm)
- Length: 96" (243.84 cm)

Warranty:

Atlas Lighting Products provides a 3 year limited warranty for this product. A full warranty can be found at www.alpinc.com


Fixture Efficiency >90%

CRI ≥ 81


UL 1598B Listed as Luminaire Conversion, Retrofit



ORDERING INFORMATION

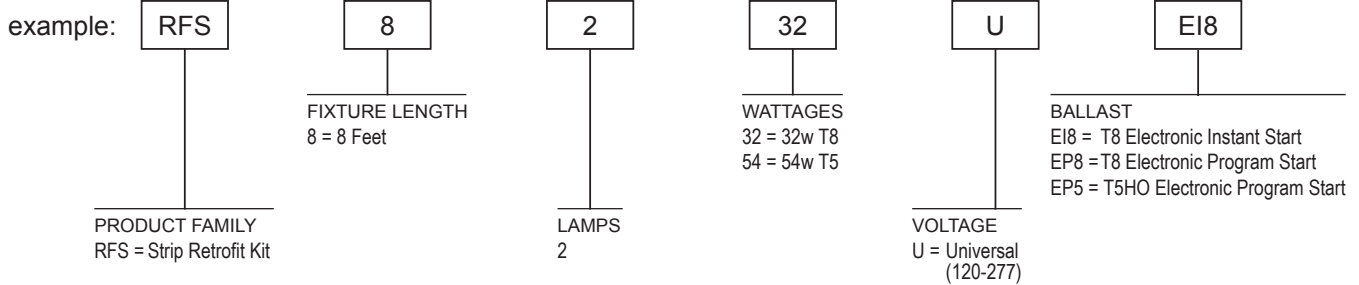

DIMENSIONS

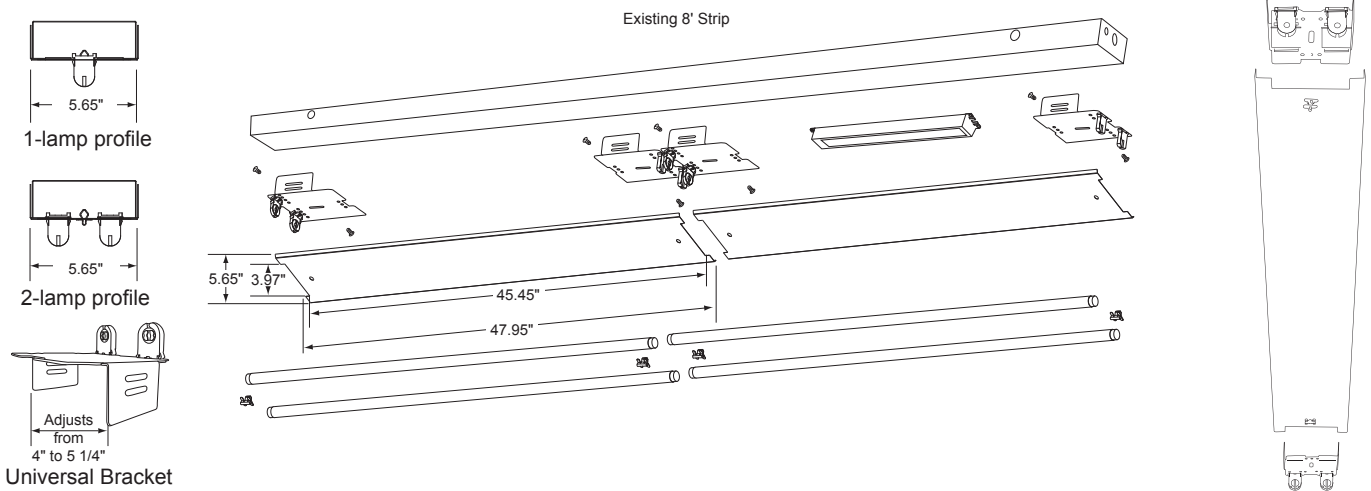

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216
800-849-8485 | FAX: 336-227-0110 | www.atlaslightingproducts.com



FLUORESCENT INDUSTRIAL LIGHTING
RFS SERIES
STRIP RETROFIT KITS

COMPONENT SPECS

RFSR Series

| FIXTURE NUMBER | BALLAST PART # | QTY | BALLAST FACTOR | INPUT WATTS | CEE | LAMP | WATTAGE PART # | QTY | LUMENS | LIFE | CRI | CCT | CEE |
|----------------|----------------|-----|----------------|-------------|-----|-----------|----------------|-----|--------|------|-----|------|-----|
| RFS4132UEIN8 | EB232UI | 1 | 0.88 | 30 | YES | F32T8/841 | 32 | 1 | 3100 | 20K+ | 82 | 4100 | YES |
| RFS4132UEI8 | EB232UIH | 1 | 1.18 | 42 | YES | F32T8/841 | 32 | 1 | 3100 | 20K+ | 82 | 4100 | YES |
| RFS4154UEP5 | EB254UP | 1 | 1 | 63 | N/A | F54T5/841 | 54 | 1 | 4450 | 20K+ | 82 | 4100 | N/A |
| RFS4232UEIN8 | EB232UI | 1 | 0.88 | 59 | YES | F32T8/841 | 32 | 2 | 3100 | 20K+ | 82 | 4100 | YES |
| RFS4232UEI8 | EB232UIH | 1 | 1.18 | 76 | YES | F32T8/841 | 32 | 2 | 3100 | 20K+ | 82 | 4100 | YES |
| RFS4254UEP5 | EB254UP | 1 | 1 | 116 | N/A | F54T5/841 | 54 | 2 | 4450 | 20K+ | 82 | 4100 | N/A |
| RFS8132UEIN8 | EB232UI | 1 | 0.88 | 59 | YES | F32T8/841 | 32 | 2 | 3100 | 20K+ | 82 | 4100 | YES |
| RFS8132UEI8 | EB232UIH | 1 | 1.18 | 76 | YES | F32T8/841 | 32 | 2 | 3100 | 20K+ | 82 | 4100 | YES |
| RFS8154UEP5 | EB254UP | 1 | 1 | 116 | N/A | F54T5/841 | 54 | 2 | 4450 | 20K+ | 82 | 4100 | N/A |
| RFS8232UEIN8 | EB432UI | 1 | 0.88 | 112 | YES | F32T8/841 | 32 | 4 | 3100 | 20K+ | 82 | 4100 | YES |
| RFS8232UEI8 | EB432UIH | 1 | 1.2 | 140 | YES | F32T8/841 | 32 | 4 | 3100 | 20K+ | 82 | 4100 | YES |
| RFS8254UEP5 | EB454UP | 1 | 1 | 232 | N/A | F54T5/841 | 54 | 4 | 4450 | 20K+ | 82 | 4100 | N/A |

Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.