

### 1Ø: Small Circuit Main Lug Interiors

| Amps | Catalog Number <sup>①</sup> | Circuits | Spaces | Dimensions |       |
|------|-----------------------------|----------|--------|------------|-------|
|      |                             |          |        | Height     | Width |
| 60   | I0204ML1125                 | 2        | 2      | 5.06       | 2.12  |
| 60   | I0303ML3100                 | 3        | 3      | 5.06       | 3.12  |
| 125  | I0408ML1125                 | 4        | 8      | 4.51       | 6.61  |
| 125  | I0816ML1125CU               | 8        | 16     | 6.19       | 6.81  |
| 125  | I0816ML1125CUSP             | 8        | 16     | 6.19       | 6.81  |
| 200  | I0202L1200                  | 4        | 4      | 3.88       | 7.13  |

### Rock Solid 1Ø: High Circuit Main Lug Interiors (no neutrals)<sup>③</sup>

| Amps | Catalog Number <sup>①</sup> | Circuits | Spaces | Dimensions |       |
|------|-----------------------------|----------|--------|------------|-------|
|      |                             |          |        | Height     | Width |
| 125  | IR1224L1125                 | 12       | 24     | 10.80      | 7.40  |
| 125  | IR1632L1125                 | 16       | 32     | 12.80      | 7.40  |
| 125  | IR2040L1125CU               | 20       | 40     | 14.80      | 7.40  |
| 125  | IR3040L1125                 | 30       | 40     | 20.80      | 7.40  |
| 200  | IR0816L1200TR <sup>②</sup>  | 8        | 16     | 10.80      | 7.40  |
| 200  | IR2040L1200CU               | 20       | 40     | 14.80      | 7.40  |
| 200  | IR2440L1200                 | 24       | 40     | 16.80      | 7.40  |
| 200  | IR3040L1200CU               | 30       | 40     | 20.80      | 7.40  |
| 200  | IR4040L1200CU               | 40       | 40     | 24.80      | 7.40  |
| 225  | IR4242L1225CU               | 42       | 42     | 26.80      | 7.40  |

### Lug Data

| Interior           | Amperage | Wire range        | Torque         |
|--------------------|----------|-------------------|----------------|
| I0204ML1060        | 60       | 2/0 - 4 AWG       | 45 lb. - ins.  |
| I0303ML3100        | 100      | 2/0 - 4 AWG       | 45 lb. - ins.  |
| I1224ML1100        | 100      | 2/0 - 4 AWG       | 45 lb. - ins.  |
| I0408ML1125        | 125      | 2/0 - 4 AWG       | 45 lb. - ins.  |
| I0816ML1125CU/CUSP | 60       | 2/0 - 4 AWG       | 45 lb. - ins.  |
| Rock Solid         | 125      | 2/0 - 4 AWG       | 110 lb. - ins. |
| Rock Solid         | 200/225  | 300 kcmil - 4 AWG | 275 lb. - ins. |

### Small circuit Interiors

The small circuit interiors are ideal for OEM applications requiring only a few circuits. They can also be purchased as replacement items for:


I0204ML1125 – Interior for LC100CS, LW100CR

I0303ML3100 – Interior for LP003CS

I0408ML1125 – Interior for L(C,W)004N(F,S,R)

I0816ML1125CU – Interior for L(C,W)008D(F,S,R)

I0202L1200 – Interior for JC0202 Meter Mains

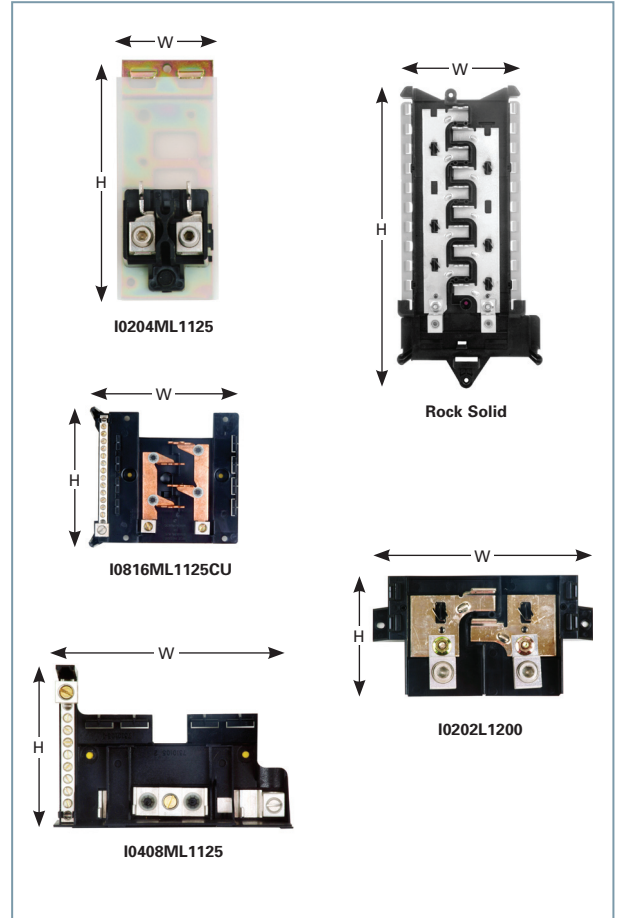

① The letters "CU" in any catalog number represent copper bus bars.

② Feed thru lugs provided

③ Convertible to main breaker using the MBK main breaker kits