

SINAMICS S120 drive system

Power Modules and line-side components


Power Modules in blocksize format

Line reactors

Overview



Line reactors for PM340 Power Modules frame sizes FSA to FSE

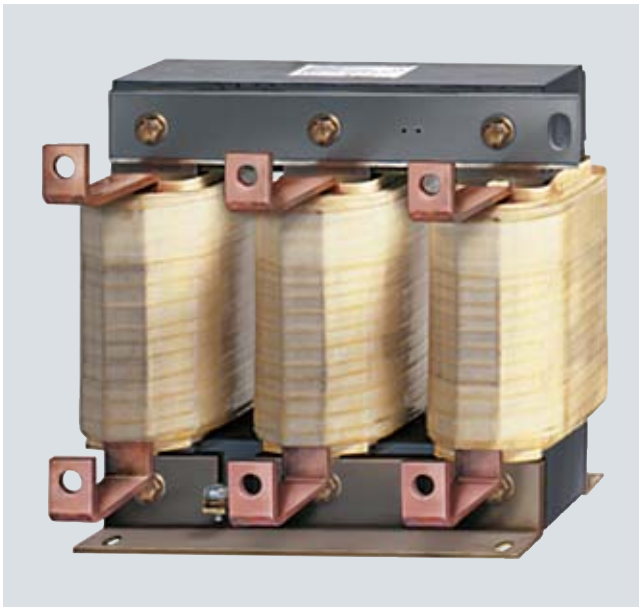

Line reactor for PM340 Power Modules frame size FSF

Line reactors limit the low-frequency harmonic effects and reduce the load on the other loads in the same supply system. Line reactors also reduce current peaks at the converter input, e.g. in the event of commutating dips.

For this reason, line reactors should always be used in combination with unfiltered PM340 devices and line voltages with a high harmonic content (industrial networks).

[For further information see chapter System description – Dimensioning.](#)

Integration

The line reactors for PM340 Power Modules of frame sizes FSA to FSE are designed as base components.

The line reactor is attached to the mounting surface and the Power Module is mounted directly on the line reactor. The cables to the Power Module are already connected at the line reactor.

The line reactor is connected to the line connection through terminals.



PM340 Power Module frame size FSB with base line reactor and shield connection kit

SINAMICS S120 drive system

Power Modules and line-side components

Power Modules in blocksize format
Line reactors

3

Technical specifications

Line voltage 200 ... 240 V 1 AC		Line reactor	
		6SE6400-3CC00-4AB3	6SE6400-3CC01-0AB3
Rated current	A	3.4	8.1
Power loss, approx. at 50/60 Hz	W	12.5/15	11.5/14.5
Line connection U1, V1, W1		Screw-type terminals	Screw-type terminals
• Conductor cross-section	mm ²	6	6
Load connection		Cable	Cable
• Conductor cross-section		3 × AWG16 (1.5 mm ²)	3 × AWG16 (1.5 mm ²)
• Length, approx.	m (ft)	0.38 (1.25)	0.38 (1.25)
PE connection		M5 screw stud	M5 screw stud
Degree of protection ¹⁾		IP20	IP20
Dimensions			
• Width	mm (in)	75.5 (2.97)	75.5 (2.97)
• Height	mm (in)	201 (7.91)	201 (7.91)
• Depth	mm (in)	50 (1.97)	50 (1.97)
Weight, approx.	kg (lb)	1.3 (3)	1.3 (3)
Approvals, according to		cURus	cURus
Suitable for Power Module in blocksize format	Type (rated output current)	6SL3210-1SB11--0... (0.9 A) 6SL3210-1SB12--3... (2.3 A)	6SL3210-1SB14--0... (3.9 A)

Line voltage 380 ... 480 V 3 AC		Line reactor					
		6SE6400-3CC00-2AD3	6SE6400-3CC00-4AD3	6SE6400-3CC00-6AD3	6SL3203-0CD21-0AA0	6SL3203-0CD21-4AA0	6SL3203-0CD22-2AA0
Rated current	A	1.9	3.5	4.8	9	11.6	25
Power loss at 50/60 Hz	W	6/7	12.5/15	7.5/9	9/11	27/32	98/118
Line connection U1, V1, W1		Screw-type terminals	Screw-type terminals	Screw-type terminals	Screw-type terminals	Screw-type terminals	Screw-type terminals
• Conductor cross-section	mm ²	6	6	6	6	6	6
Load connection		Cable	Cable	Cable	Cable	Cable	Cable
• Conductor cross-section		3 × AWG16 (1.5 mm ²)	3 × AWG16 (1.5 mm ²)	3 × AWG16 (1.5 mm ²)	3 × AWG16 (1.5 mm ²)	3 × AWG16 (1.5 mm ²)	4 × AWG10 (2.5 mm ²)
• Length, approx.	m (ft)	0.38 (1.25)	0.38 (1.25)	0.38 (1.25)	0.46 (1.51)	0.46 (1.51)	0.49 (1.61)
PE connection		M5 screw stud	M5 screw stud	M5 screw stud	M5 screw stud	M5 screw stud	M5 screw stud
Degree of protection ¹⁾		IP20	IP20	IP20	IP20	IP20	IP20
Dimensions							
• Width	mm (in)	75.5 (2.97)	75.5 (2.97)	75.5 (2.97)	153 (6.02)	153 (6.02)	190 (7.48)
• Height	mm (in)	201 (7.91)	201 (7.91)	201 (7.91)	270 (10.63)	270 (10.63)	336 (13.23)
• Depth	mm (in)	50 (1.97)	50 (1.97)	50 (1.97)	70 (2.76)	70 (2.76)	50 (1.97)
Weight, approx.	kg (lb)	1.2 (3)	1.3 (3)	1.3 (3)	3.4 (7.5)	3.4 (7.5)	6.3 (14)
Approvals, according to		cURus	cURus	cURus	cURus	cURus	cURus
Suitable for Power Module in blocksize format	Type (rated output current)	6SL3210-1SE11-3... (1.3 A) 6SL3210-1SE11-7... (1.7 A)	6SL3210-1SE12-2... (2.2 A) 6SL3210-1SE13-1... (3.1 A)	6SL3210-1SE14-1... (4.1 A)	6SL3210-1SE16-0... (5.9 A) 6SL3210-1SE17-7... (7.7 A)	6SL3210-1SE21-0... (10 A)	6SL3210-1SE21-8... (18 A) 6SL3210-1SE22-5... (25 A)

¹⁾ With correctly connected load connection cable.

SINAMICS S120 drive system

Power Modules and line-side components

Power Modules in blocksize format
Line reactors

Selection and ordering data

Rated output current A	Type rating kW (HP)	Suitable for Power Module in blocksize format Type	Frame size	Line reactor Order No.
Line voltage 200 ... 240 V 1 AC				
0.9	0.12 (0.2)	6SL3210-1SB11-0...	FSA	6SE6400-3CC00-4AB3
2.3	0.37 (0.5)	6SL3210-1SB12-3...		
3.9	0.75 (0.75)	6SL3210-1SB14-0...	FSA	6SE6400-3CC01-0AB3
Line voltage 380 ... 480 V 3 AC				
1.3	0.37 (0.5)	6SL3210-1SE11-3UA0	FSA	6SE6400-3CC00-2AD3
1.7	0.55 (0.75)	6SL3210-1SE11-7UA0		
2.2	0.75 (1)	6SL3210-1SE12-2UA0	FSA	6SE6400-3CC00-4AD3
3.1	1.1 (1.5)	6SL3210-1SE13-1UA0		
4.1	1.5 (2)	6SL3210-1SE14-1UA0	FSA	6SE6400-3CC00-6AD3
5.9	2.2 (3)	6SL3210-1SE16-0...	FSB	6SL3203-0CD21-0AA0
7.7	3 (5)	6SL3210-1SE17-7...		
10	4 (5)	6SL3210-1SE21-0...	FSB	6SL3203-0CD21-4AA0
18	7.5 (10)	6SL3210-1SE21-8...	FSC	6SL3203-0CD22-2AA0
25	11 (15)	6SL3210-1SE22-5...		
32	15 (20)	6SL3210-1SE23-2...	FSC	6SL3203-0CD23-5AA0
38	18.5 (25)	6SL3210-1SE23-8...	FSD	6SL3203-0CJ24-5AA0
45	22 (30)	6SL3210-1SE24-5...		
60	30 (40)	6SL3210-1SE26-0...	FSD	6SL3203-0CD25-3AA0
75	37 (50)	6SL3210-1SE27-5...	FSE	6SL3203-0CJ28-6AA0
90	45 (60)	6SL3210-1SE31-0...		
110	55 (75)	6SL3210-1SE31-1...	FSF	6SE6400-3CC11-2FD0
145	75 (100)	6SL3210-1SE31-5...		
178	90 (125)	6SL3210-1SE31-8...	FSF	6SE6400-3CC11-7FD0

3