

MOTION-CONNECT connection systems

Overview

Power cables

| Cable | For motor | MOTION-CONNECT 500 | MOTION-CONNECT 800PLUS | Page |
|---|----------------------------------|---------------------------|----------------------------|-----------------|
| Dynamic requirements | SIMOTICS | Medium | High | |
| Environmental requirements | | Medium | High | |
| UL/CSA | | ✓ | ✓ | |
| Halogen-free | | – | ✓ | |
| RoHS | | ✓ | ✓ | |
| Power cables with SPEED-CONNECT connector | | | | |
|  | S-1FT7 | ✓ | ✓ | 12/9, 12/10 |
| | S-1FK7 | ✓ | ✓ | 12/11 |
| | M-1PH808 M-1PH810 | ✓ | ✓ | 12/9 |
| | | | | |
| Power cables with full-thread connector | | | | |
|  | S-1FT7 | ✓ | ✓ | 12/12 ... 12/14 |
| | S-1FK7 | ✓ | ✓ | 12/14 |
| | M-1PH808 M-1PH810 M-1PH813 | ✓ | ✓ | 12/12, 12/14 |
| | L-1FN3 | – | ✓ | 12/19 |
| | T-1FW6 | – | ✓ | 12/21 |
| | | | | |
| Extensions for power cables with SPEED-CONNECT or full-thread connector | | | | |
|  | S-1FT7 | ✓ | ✓ | 12/15 |
| | S-1FK7 | ✓ | ✓ | 12/15 |
| | M-1PH808 M-1PH810 M-1PH813 | ✓ | ✓ | 12/15 |
| | L-1FN3 | – | ✓ | 12/19 |
| | T-1FW6 | – | ✓ | 12/21 |
| | | | | |
| Power cables for motors with terminal box | | | | |
|  | M-1PH8 | ✓ from 35 mm ² | ✓ up to 16 mm ² | 12/16, 12/17 |
| | T-1FW3 | ✓ | ✓ up to 16 mm ² | 12/20 |

Hybrid cables for SINAMICS S120M distributed servo drive

| Cable | For distributed servo drive | MOTION-CONNECT 800PLUS | Page |
|---|-----------------------------|------------------------|-------|
| Dynamic requirements | SINAMICS S120M | High | |
| Environmental requirements | | High | |
| UL/CSA | | ✓ | |
| Halogen-free | | ✓ | |
| RoHS | | ✓ | |
| Hybrid cables | | | |
|  | 6FX8002-7HY | ✓ | 12/22 |

✓ = Possible

– = Not possible

MOTION-CONNECT connection systems

Introduction

General information

Overview

MOTION-CONNECT cables are suitable for use with many different types of machine tools and production machinery.

The following variants of MOTION-CONNECT cable are available as fully-assembled power and signal cables or sold by the meter:

- **MOTION-CONNECT 500**
 - Cost-effective solution for predominantly fixed installation
 - Suitable for low mechanical loading
 - Tested for travel distances up to 5 m (16.4 ft)
- **MOTION-CONNECT 800PLUS**
 - Meets requirements for use in cable carriers
 - Suitable for high mechanical loading
 - Oil resistance
 - Tested for travel distances of up to 50 m (164 ft)

Benefits

Pre-assembled MOTION-CONNECT cables provide high quality and perfect, system-tested functionality.

SPEED-CONNECT

Fast, stable and reliable connections can be made with the new, pre-assembled cables with SPEED-CONNECT connectors. With a short rotation as far as the stop, the cap nut of the connector secures the connection.

The cables with SPEED-CONNECT connectors supplement the previous offering of MOTION-CONNECT cables with full-thread connectors.

Application

MOTION-CONNECT cables are intended for use in machines. They are not suitable for building technology applications or outdoor installation.

MOTION-CONNECT cables have been tested in a cable carrier with horizontal travel distance and have also been designed for this type of application. They are not self-supporting.

The pre-assembled cables can be ordered in length units of 10 cm (3.94 in) and can be extended, if necessary.


When cable lengths (basic cables and extensions) are determined for the systems and applications described in this catalog, the technically permissible maximum cable lengths (e.g., 25 m (82 ft)) specified in the catalog must be observed. Malfunctions can occur if longer cables are used.

Siemens assumes no liability for correct transmission of signals or power in this case.


Compatibility between SPEED-CONNECT and full-thread connectors:

| Connector on motor with external thread | Connector with cap nut on cable | Compatibility |
|---|---------------------------------|---------------|
| SPEED-CONNECT | SPEED-CONNECT | ✓ |
| SPEED-CONNECT | Full-thread | ✓ |
| Full-thread | Full-thread | ✓ |
| Full-thread | SPEED-CONNECT | – |

Function

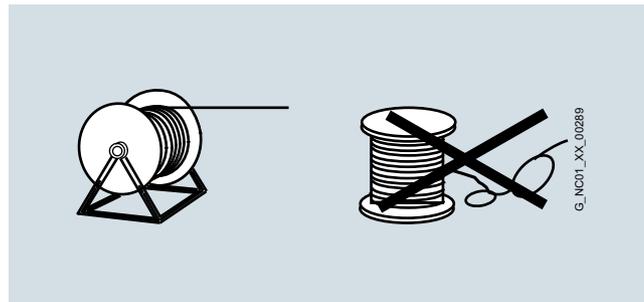


The cables must be removed from the drum without twisting, i.e., the cables must be unwound and must never be lifted over the drum flange in loops.

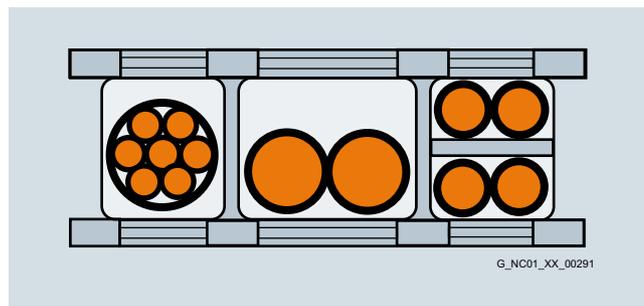

To maximize the service life of the cable carrier and cables, cables in the carrier made from different materials must be separated by spacers in the cable carrier. The spacers must be filled evenly to ensure that the position of the cables does not change during operation. The cables should be distributed as symmetrically as possible according to their weights and dimensions. Cables with very different outer diameters should also be separated by spacers.


When inserting pre-assembled cables into the cable carrier, do **not** pull at the connector, as this may damage the strain relief or cable clamping.

The cables must not be fixed in the cable carrier. They must be freely movable.

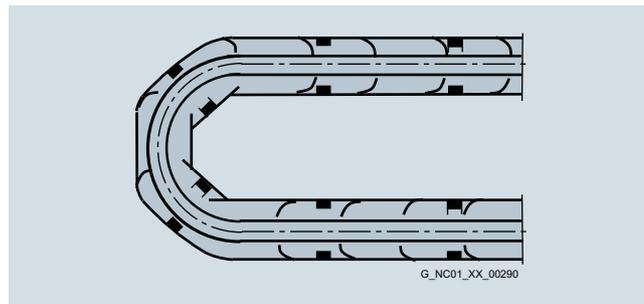

The cables must be able to be moved without applying force in particular in the bending radii of the carrier. The specified minimum bending radii must be adhered to.

The cable fixings must be attached at both ends at an appropriate distance away from the end points of the moving parts in a dead zone.

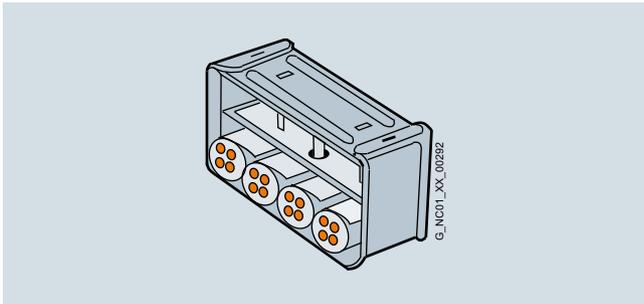Function (continued)


MOTION-CONNECT cables are tested in a cable carrier. The cables are attached at one end by means of strain relief to the moving ends of the cable carrier. Strain relief is applied over a wide area of the cable jacket surface without crimping the cable.

Cables must be installed in accordance with the instructions supplied by the cable carrier manufacturer.

Note:

If, for example, pre-assembled cables are installed in a cable carrier in such a way that the connector would inhibit assembly, pre-assembled cables without assembled connectors can also be supplied (power and signal cables¹⁾). In this case, the contacts of the cables are crimped and the connector is supplied separately. After installing the cables, the customer assembles the connector.


In case of vibration load and with horizontal or vertical cable entries, we recommend that the cable is additionally fixed if between the cable strain relief on the cable carrier and the terminal at the motor part of the cable is hanging loose or is not routed. To prevent machine vibrations being transmitted to the connectors, the cable should be fixed at the moving part where the motor is mounted.

Representation in connection overviews


| Symbol | Explanation |
|---|--|
|  | Connector with pin contacts |
|  | Connector with socket contacts |
|  | Exposed core ends |
|  | Cable must be supplied by the customer |

Characteristic curves

The shaded area beneath the characteristic represents the potential range of use for the cables. The characteristics represent the tested operating points.

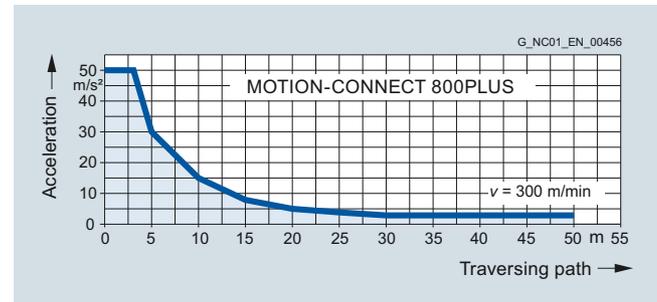

Acceleration for MOTION-CONNECT 800PLUS signal and power cables up to 16 mm²

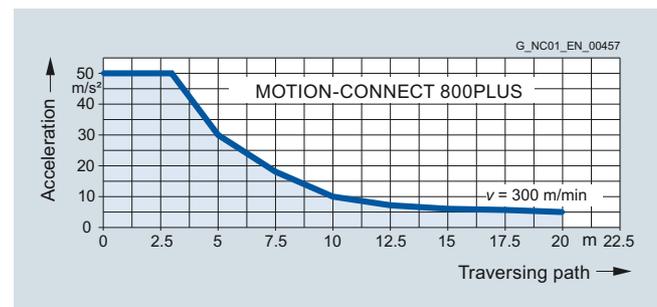

Permissible acceleration for MOTION-CONNECT 800PLUS cables of 25 mm², 35 mm², and 50 mm²

¹⁾ Not applicable to DRIVE-CLiQ signal cables.

MOTION-CONNECT connection systems

Introduction

General information

More information

Current carrying capacity for power and signal cables

The current carrying capacity of PVC/PUR-insulated copper cables is specified for installation types B1, B2, C, and E under continuous operating conditions in the table with reference to an ambient air temperature of 40 °C (104 °F). For other ambient temperatures, the values must be corrected by the derating factors from the table.

| Cross-section mm ² | Current carrying capacity rms AC 50/60 Hz or DC in amps for installation type | | | |
|----------------------------------|--|---|---|---|
| | B1 Single-core cables in conduits or installation ducts | B2 Multi-core cables in conduits or cable ducts | C Multi-core cables, vertically or horizontally on walls/open, without conduits and installation ducts/with contact | E Multi-core cables, horizon- tally or vertically on perforated cable racks/ open, without conduits and installation ducts/with contact |
| Electronics ¹⁾ | | | | |
| 0.20 | – | 4.3 | 4.4 | 4.4 |
| 0.50 | – | 7.5 | 7.5 | 7.8 |
| 0.75 | – | 9 | 9.5 | 10 |
| Power ²⁾ | | | | |
| 0.75 | 8.6 | 8.5 | 9.8 | 10.4 |
| 1.00 | 10.3 | 10.1 | 11.7 | 12.4 |
| 1.50 | 13.5 | 13.1 | 15.2 | 16.1 |
| 2.50 | 18.3 | 17.4 | 21 | 22 |
| 4 | 24 | 23 | 28 | 30 |
| 6 | 31 | 30 | 36 | 37 |
| 10 | 44 | 40 | 50 | 52 |
| 16 | 59 | 54 | 66 | 70 |
| 25 | 77 | 70 | 84 | 88 |
| 35 | 96 | 86 | 104 | 110 |
| 50 | 117 | 103 | 125 | 133 |
| 70 | 149 | 130 | 160 | 171 |
| 95 | 180 | 165 | 194 | 207 |
| 120 | 208 | 179 | 225 | 240 |

Derating factors for power and signal cables

| Ambient air temperature °C (°F) | Derating factor according to EN 60204-1, Table D.1 |
|------------------------------------|--|
| 30 (86) | 1.15 |
| 35 (95) | 1.08 |
| 40 (104) | 1.00 |
| 45 (113) | 0.91 |
| 50 (122) | 0.82 |
| 55 (131) | 0.71 |
| 60 (140) | 0.58 |

¹⁾ One control circuit pair.

²⁾ One symmetrically loaded three-phase AC cable.

MOTION-CONNECT connection systems

Signal cables for SINAMICS S120

Overview



MOTION-CONNECT DRIVE-CLiQ signal cable with IP20/IP67 connector

Signal cables are pre-assembled and are sold by the meter for connecting a variety of components.

The following different types of cable are available:

- DRIVE-CLiQ signal cables
- MOTION-CONNECT DRIVE-CLiQ signal cables
- MOTION-CONNECT pre-assembled signal cables

Type of delivery for pre-assembled signal cables

Pre-assembled signal cables are available in units of 10 cm (3.94 in).

The cables are supplied on reels up to 30 kg or 100 m (66.2 lb or 328 ft). Above 30 kg or 100 m (66.2 lb or 328 ft), cable drums are used instead of reels.

Application

DRIVE-CLiQ signal cables without 24 V DC cores

are used to connect components with DRIVE-CLiQ connections which have a separate or external 24 V DC power supply.

MOTION-CONNECT DRIVE-CLiQ signal cables with 24 V DC cores

are used whenever components with DRIVE-CLiQ connections must meet high requirements such as mechanical stress and oil resistance, e.g., where a connection is made outside the cabinet between Power Modules, Motor Modules, and SIMOTICS S-1FK7/SIMOTICS M-1PH8 motors with DRIVE-CLiQ interface.

MOTION-CONNECT pre-assembled signal cables

are used whenever motor encoders on motors without DRIVE-CLiQ interface need to be connected to Sensor Modules.

Design

If pre-assembled signal cables are to be installed in a cable carrier in such a way that the connector would inhibit assembly, pre-assembled cables without assembled connector can also be supplied. In this case, the contacts of the cables are crimped and the connector enclosure is supplied separately. After installing the cables, the customer assembles the connector enclosure.

The 6FX.002-2....-.... signal cables are available with crimped contacts and with the connector enclosure supplied separately (not in the case of DRIVE-CLiQ signal cables and signal cables with exposed core ends).

Signal cables with separately supplied **module-end** connector: in this case, the 6th position of the Article No. must be changed from **0** to **1**:

6FX.012-2C...-.... (not for signal cables for connecting via terminals or 6FX.002-2AH00-...., 6FX.002-2CA12-....).

Signal cables with separately supplied **motor-end** connector: in this case, the 6th position of the Article No. must be changed from **0** to **4**:

6FX.042-2C...-.... (not for signal cables for connecting via terminals or 6FX8002-2BA20-...., 6FX8002-2BA21-....).

Note:

Once the contacts have latched into the insulator, they can no longer be removed.

MOTION-CONNECT connection systems

Signal cables for SINAMICS S120

Technical specifications

| DRIVE-CLiQ signal cables | DRIVE-CLiQ 6FX2...-1DC..-.... | DRIVE-CLiQ MOTION-CONNECT 500 6FX5...-DC..-.... | DRIVE-CLiQ MOTION-CONNECT 800PLUS 6FX8...-DC..-.... |
|---|---|---|---|
| Certificate of suitability | | | |
| • cURus or UR/CSA | UL STYLE 2502/CSA-N.210.2-M90 | UL STYLE 2502/CSA-N.210.2-M90 | UL STYLE 2502/CSA-N.210.2-M90 |
| • UR-CSA File No. ¹⁾ | Yes | Yes | Yes |
| • RoHS conformity | Yes | Yes | Yes |
| Rated voltage according to EN 50395 | 30 V | 30 V | 30 V |
| Test voltage, rms | 500 V | 500 V | 500 V |
| Operating temperature on the surface | | | |
| • Fixed installation | -20 ... +80 °C (-4 ... +176 °F) | -20 ... +80 °C (-4 ... +176 °F) | -20 ... +80 °C (-4 ... +176 °F) |
| • Flexible installation | – | 0 ... 60 °C (32 ... 140 °F) | -20 ... +60 °C (-4 ... +140 °F) |
| Tensile stress, max. | | | |
| • Fixed installation | 45 N/mm ² (6526 lb/in ²) | 80 N/mm ² (11603 lb/in ²) | 50 N/mm ² (7252 lb/in ²) |
| • Flexible installation | – | 30 N/mm ² (4351 lb/in ²) | 20 N/mm ² (2901 lb/in ²) |
| Smallest bending radius | | | |
| • Fixed installation | 50 mm (1.97 in) | 35 mm (1.38 in) | 35 mm (1.38 in) |
| • Flexible installation | – | 125 mm (4.92 in) | 75 mm (2.95 in) |
| Torsional stress | – | Absolute 30°/m | Absolute 30°/m |
| Bending | – | 100000 | 10 million |
| Traversing velocity | – | 30 m/min (98.4 ft/min) | 300 m/min (984 ft/min) |
| Acceleration | – | 2 m/s ² (6.56 ft/s ²) | Up to 50 m/s ² (164 ft/s ²), see characteristics on page 12/5 |
| Insulation material, incl. jacket | CFC/silicone-free | CFC/silicone-free | CFC/halogen-free/silicon-free IEC 60754-1/DIN VDE 0472-815 |
| Oil resistance | EN 60811-2-1 | EN 60811-2-1 (mineral oil only) | EN 60811-2-1 |
| Outer jacket | PVC Gray RAL 7032 | PVC DESINA color green RAL 6018 | PUR, HD22.10 S2 (VDE 0282, Part 10) DESINA color green RAL 6018 |
| Flame-retardant | EN 60332-1-1 to 1-3 | EN 60332-1-1 to 1-3 | EN 60332-1-1 to 1-3 |

Degree of protection of the pre-assembled signal cables and their extensions when closed and inserted: IP67.

¹⁾ The File No. is printed on the cable jacket.

MOTION-CONNECT connection systems

Signal cables for SINAMICS S120

DRIVE-CLiQ signal cables without 24 V DC cores**Selection and ordering data****Pre-assembled DRIVE-CLiQ signal cables without 24 V DC cores**

| Version | Length | D_{\max} | Connector/degree of protection, module-end | Connector/degree of protection, motor-end | DRIVE-CLiQ signal cable without 24 V DC cores |
|--|---------------|---------------------------|--|---|--|
| | m (ft) | mm (in) | | | Article No. |
| Fixed lengths  | 0.11 (0.36) | | RJ45/IP20 | RJ45/IP20 | 6SL3060-4AB00-0AA0 |
| | 0.16 (0.52) | | | | 6SL3060-4AD00-0AA0 |
| | 0.21 (0.69) | | | | 6SL3060-4AF00-0AA0 |
| | 0.26 (0.85) | | | | 6SL3060-4AH00-0AA0 |
| | 0.31 (1.02) | | | | 6SL3060-4AK00-0AA0 |
| | 0.36 (1.18) | | | | 6SL3060-4AM00-0AA0 |
| | 0.41 (1.35) | | | | 6SL3060-4AP00-0AA0 |
| | 0.60 (1.97) | | | | 6SL3060-4AU00-0AA0 |
| | 0.95 (3.12) | | | | 6SL3060-4AA10-0AA0 |
| | 1.20 (3.94) | | | | 6SL3060-4AW00-0AA0 |
| | 1.45 (4.76) | | | | 6SL3060-4AF10-0AA0 |
| | 2.10 (6.89) | | | | 6SL3060-4AB20-0AA0 |
| | 2.80 (9.19) | | | | 6SL3060-4AJ20-0AA0 |
| 5.00 (16.4) | | 6SL3060-4AA50-0AA0 | | | |
| To the decimeter | Max. 70 (230) | 7.0 (0.28) | RJ45/IP20 | RJ45/IP20 | 6FX2002-1DC00-.... |
|  | | | | | |
| To the decimeter | Max. 70 (230) | 7.0 (0.28) | RJ45/IP67 | RJ45/IP67 | 6FX2002-1DC20-.... |
|  | | | | | |
| Length code | | | | | |

Overview

| Data position in Article No. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | |
|--|--|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|--|
| MOTION-CONNECT 500 | 6 | F | X | 5 | 0 | ■ | 2 | - | 2 | ■ | ■ | ■ | - | . | . | . | |
| MOTION-CONNECT 800PLUS | 6 | F | X | 8 | 0 | ■ | 2 | - | 2 | ■ | ■ | ■ | - | . | . | . | |
| 6FX2 cables | 6 | F | X | 2 | 0 | 0 | 2 | - | 1 | D | C | ■ | 0 | - | . | . | |
| Pre-assembled at motor and module ends | | | | | 0 | | | | | | | | | | | | |
| Pre-assembled at motor end, connector at module end supplied separately | | | | | 1 | | | | | | | | | | | | |
| Connector at motor end supplied separately, pre-assembled at module end | | | | | 4 | | | | | | | | | | | | |
| Variant: Signal cables for integrated encoder | | | | | | | | | | | | | | | | | |
| <u>DRIVE-CLiQ cables between</u> | <u>and</u> | | | | | | | | | | | | | | | | |
| Power Module/Motor Module/SMC with IP20 connector | Power Module/Motor Module/SMC with IP20 connector | | | | | | | | | | D | C | 0 | 0 | | | |
| Power Module/Motor Module/SMC with IP20 connector | Motor/encoder/SME IP67 connector | | | | | | | | | | D | C | 1 | 0 | | | |
| DME20/cabinet bushing/coupler | Motor/encoder/SME IP67 connector | | | | | | | | | | D | C | 2 | 0 | | | |
| <u>Basic cable between</u> | <u>and motor with</u> | | | | | | | | | | | | | | | | |
| SMC20 | Incremental encoder (sin/cos 1 V _{pp}), full-thread connector, M23 | | | | | | | | | | C | A | 3 | 1 | | | |
| SMC30 | Incremental encoder (HTL), full-thread connector, M23 | | | | | | | | | | A | H | 0 | 0 | | | |
| CU310-2 | Incremental encoder (HTL), full-thread connector, M23 | | | | | | | | | | A | H | 1 | 1 | | | |
| SMC20 | Absolute encoder, full-thread connector, M23 | | | | | | | | | | E | Q | 1 | 0 | | | |
| SMC10 | Resolver, full-thread connector, M23 | | | | | | | | | | C | F | 0 | 2 | | | |
| SMC20 | Incremental encoder (sin/cos 1 V _{pp}), SPEED-CONNECT connector, M23 | | | | | | | | | | C | Q | 3 | 1 | | | |
| SMC20 | Incremental encoder, SPEED-CONNECT connector, M17 | | | | | | | | | | C | N | 2 | 0 | | | |
| SMC20 | Absolute encoder, SPEED-CONNECT connector, M23 | | | | | | | | | | E | Q | 3 | 1 | | | |
| SMC20 | Absolute encoder, SPEED-CONNECT connector, M17 | | | | | | | | | | E | N | 2 | 0 | | | |
| SMC10 | Resolver, SPEED-CONNECT connector, M17 | | | | | | | | | | F | N | 2 | 0 | | | |
| <u>Extension between basic cable with connector</u> | <u>and motor connector</u> | | | | | | | | | | | | | | | | |
| Full-thread or SPEED-CONNECT | Full-thread or SPEED-CONNECT | | | | | | | | | | | | | 4 | | | |
| Variant: Signal cables for external encoder | | | | | | | | | | | | | | | | | |
| <u>Basic cable between</u> | <u>and</u> | | | | | | | | | | | | | | | | |
| SMC30 | Incremental encoder 6FX2001-2 (TTL/supply 5 V), full-thread connector | | | | | | | | | | C | R | 0 | 0 | | | |
| SMC30 | Incremental encoder 1XP8012-2./1XP8032-2. (TTL/supply 24 V), full-thread connector | | | | | | | | | | C | D | 2 | 4 | | | |
| SMC20 | Incremental encoder 6FX2001-3 (sin/cos 1 V _{pp}), full-thread connector | | | | | | | | | | C | G | 0 | 0 | | | |
| SMC30 | Incremental encoder 6FX2001-4 (HTL), full-thread connector | | | | | | | | | | C | A | 1 | 2 | | | |
| SMC30 | Incremental encoder 1XP8012-1./1XP8032-1. (HTL), full-thread connector | | | | | | | | | | C | A | 1 | 2 | | | |
| SMC30 | Absolute encoder with SSI 1XP8014-2./1XP8024-2., full-thread connector | | | | | | | | | | C | C | 0 | 6 | | | |
| SMC30 | Absolute encoder 6FX2001-5.S (SSI), full-thread connector | | | | | | | | | | C | C | 1 | 1 | | | |
| SMC20 | Absolute encoder 6FX2001-5.E (EnDat 2.1), full-thread connector | | | | | | | | | | C | H | 0 | 0 | | | |
| SMC20 | Absolute encoder 1XP8014-10/1XP8024-10 (EnDat 2.1), full-thread connector | | | | | | | | | | C | H | 0 | 0 | | | |
| SMC10 | Resolver 1XP8013-1./1XP8023-1., full-thread connector | | | | | | | | | | C | F | 0 | 6 | | | |
| <u>Extension between basic cable with connector</u> | <u>and motor connector</u> | | | | | | | | | | | | | | | | |
| Full-thread | Full-thread | | | | | | | | | | | | | 4 | | | |
| Variant: Signal cables for temperature sensor | | | | | | | | | | | | | | | | | |
| <u>Adapter cable with M17 socket on SIMOTICS T-1FW6 terminals</u> | 6 F X 8 0 0 2 - 2 S L ■ ■ - | | | | | | | | | | 0 | 0 | | | | | |
| <u>Adapter cable with M17 socket on SIMOTICS L-1FN3100/L-1FN3150</u> | | | | | | | | | | | 0 | 1 | | | | | |
| <u>Adapter cable with M17 socket on SIMOTICS L-1FN3300 ... L-1FN3900</u> | | | | | | | | | | | 0 | 2 | | | | | |
| <u>Extension to basic cable between SME12x and SIMOTICS L-1FN3/SIMOTICS T-1FW6</u> | | | | | | | | | | | 1 | 0 | | | | | |
| <u>Basic cable between TM120 and SIMOTICS L-1FN3/SIMOTICS T-1FW6</u> | | | | | | | | | | | 2 | 0 | | | | | |
| Length code | | | | | | | | | | | | | | | | | |
| Units of 10 cm (3.94 in) or 1 meter (3.28 ft) or in fixed lengths | | | | | | | | | | | | | | | | | |

MOTION-CONNECT connection systems

Article number code

Length code


Overview

| Description | Article No. supplement |
|---|---------------------------|
| Length code for pre-assembled cables | |
| 6FX.0.2-.....- ■ ■ ■ ■ ■ | |
| 0 m | 1 |
| 100 m (328 ft) | 2 |
| 200 m (656 ft) | 3 |
| 0 m | A |
| 10 m (32.8 ft) | B |
| 20 m (65.6 ft) | C |
| 30 m (98.4 ft) | D |
| 40 m (131 ft) | E |
| 50 m (164 ft) | F |
| 60 m (197 ft) | G |
| 70 m (230 ft) | H |
| 80 m (262 ft) | J |
| 90 m (295 ft) | K |
| 0 m | A |
| 1 m (3.28 ft) | B |
| 2 m (6.56 ft) | C |
| 3 m (9.84 ft) | D |
| 4 m (13.1 ft) | E |
| 5 m (16.4 ft) | F |
| 6 m (19.7 ft) | G |
| 7 m (23.0 ft) | H |
| 8 m (26.2 ft) | J |
| 9 m (29.5 ft) | K |
| 0 m | 0 |
| 0.1 m (3.94 in) | 1 |
| 0.2 m (7.87 in) | 2 |
| 0.3 m (11.81 in) | 3 |
| 0.4 m (15.75 in) | 4 |
| 0.5 m (19.96 in) | 5 |
| 0.6 m (23.62 in) | 6 |
| 0.7 m (27.56 in) | 7 |
| 0.8 m (31.5 in) | 8 |
| Examples: | 1.0 m (3.28 ft): 1 A B 0 |
| | 2.2 m (7.22 ft): 1 A C 2 |
| | 8.0 m (26.3 ft): 1 A J 0 |
| | 299.0 m (981 ft): 3 K K 0 |


| Description | Article No. supplement |
|---|------------------------|
| Length code for power and signal cables, sold by the meter ¹⁾ | |
| 6FX.008-.....- ■ ■ ■ A 0 | |
| 50 m (164 ft) | 1 F |
| 100 m (328 ft) | 2 A |
| 200 m (656 ft) | 3 A |
| 500 m (1641 ft) | 6 A |

More information

Definition of lengths for pre-assembled cables

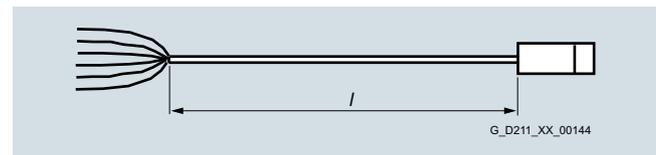

Cable with exposed core ends and pre-assembled connector

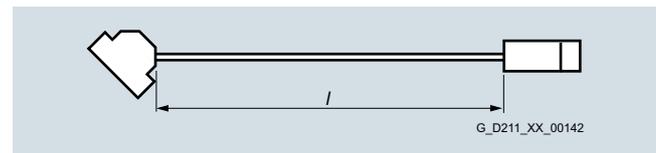

Cable with pre-assembled connectors at both ends

Tolerance:

- Cable lengths up to 10 m (32.8 ft): $\pm 2\%$
- Cable lengths of 10 m (32.8 ft) and longer: $\pm 1\%$

¹⁾ Note type of delivery. Cables with core cross-section $4 \times 4 \text{ mm}^2$ or $4 \times 4 \text{ mm}^2$ with brake cores can be delivered in units of 1 m (3.28 ft).