

solid-state time-delayed front-side auxiliary switch Time range  
0.05...1 s, 100 ... 127 V AC, 1 NO contact, 1 NC contact ON delay,  
for 3RT1



Product brand name	SIRIUS
Product designation	auxiliary switch
Design of the product	slow-operating
Product type designation	3RT19

General technical data	
Size of contactor can be combined company-specific	S0 ... S12
Product component	
• semi-conductor output	No
Product extension required remote control	No
Product extension optional remote control	No
Insulation voltage	
• for overvoltage category III according to IEC 60664	
— with degree of pollution 3 rated value	300 V
Degree of pollution	3
Surge voltage resistance rated value	4 000 V
Protection class IP	
• of the terminal	IP20
Shock resistance	

• acc. to IEC 60068-2-27	11g / 15 ms
<b>Vibration resistance</b>	
• acc. to IEC 60068-2-6	10 ... 55 Hz: 0.35 mm
<b>Mechanical service life (switching cycles)</b>	
• typical	10 000 000
<b>Electrical endurance (switching cycles)</b>	
• at AC-15 at 230 V typical	100 000
<b>Adjustable time</b>	0.05 ... 1 s
<b>Relative setting accuracy relating to full-scale value</b>	15 %
<b>Recovery time</b>	150 ms
<b>Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750</b>	K
<b>Reference code acc. to DIN EN 81346-2</b>	K
<b>Reference code acc. to DIN EN 61346-2</b>	K
<b>Relative repeat accuracy</b>	1 %

### Product Function

<b>Product function star-delta circuit</b>	No
--	----

### Control circuit/ Control

<b>Type of voltage of the control supply voltage</b>	AC
<b>Control supply voltage 1 at AC</b>	
• at 50 Hz	100 ... 127 V
• at 60 Hz	100 ... 127 V
<b>Control supply voltage frequency 1</b>	50 ... 60 Hz
<b>Operating range factor control supply voltage rated value at DC</b>	
• initial value	0.85
• Full-scale value	1.1
<b>Operating range factor control supply voltage rated value at AC at 50 Hz</b>	
• initial value	0.85
• Full-scale value	1.1
<b>Operating range factor control supply voltage rated value at AC at 60 Hz</b>	
• initial value	0.85
• Full-scale value	1.1

### Switching Function

<b>Switching function</b>	
• ON-delay	Yes
• ON-delay/instantaneous contact	No
• passing make contact	No
• passing make contact/instantaneous contact	No
• OFF delay	No

<b>Switching function</b>	
• flashing symmetrically starting with interval/instantaneous	No
• flashing symmetrically starting with interval	No
• flashing symmetrically starting with pulse/instantaneous	No
• flashing symmetrically starting with pulse	No
• flashing asymmetrically starting with interval	No
• flashing asymmetrically starting with pulse	No
<b>Switching function</b>	
• fixed clock cycle beginning with pulse	No
• fixed clock cycle beginning with interval	No
<b>Switching function</b>	
• variably clocked start with impulse	No
• variably clocked start with interval	No
<b>Switching function</b>	
• star-delta circuit with delay time	No
• star-delta circuit	No
<b>Switching function with control signal</b>	
• additive ON delay	No
• passing break contact	No
• passing break contact/instantaneous	No
• OFF delay	No
• OFF delay/instantaneous	No
• pulse delayed	No
• pulse delayed/instantaneous	No
• pulse-shaping	No
• pulse-shaping/instantaneous	No
• additive ON delay/instantaneous	No
• ON-delay/OFF-delay	No
• ON-delay/OFF-delay/instantaneous	No
• passing make contact	No
• passing make contact/instantaneous contact	No
<b>Switching function of interval relay with control signal</b>	
• retrotriggerable with deactivated control signal/instantaneous contact	No
• retrotriggerable with activated control signal	No
• retrotriggerable with activated control signal/instantaneous contact	No
• retriggerable with deactivated control signal	No
<b>Design of the control terminal non-floating</b>	No

Short-circuit protection

<b>Design of the fuse link</b>	
<ul style="list-style-type: none"> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gL/gG: 4 A

### Auxiliary circuit

<b>Number of NC contacts</b>	
<ul style="list-style-type: none"> <li>delayed switching</li> </ul>	1
<ul style="list-style-type: none"> <li>instantaneous contact</li> </ul>	0
<b>Number of NO contacts</b>	
<ul style="list-style-type: none"> <li>delayed switching</li> </ul>	1
<ul style="list-style-type: none"> <li>instantaneous contact</li> </ul>	0
<b>Number of CO contacts</b>	
<ul style="list-style-type: none"> <li>delayed switching</li> </ul>	0
<ul style="list-style-type: none"> <li>instantaneous contact</li> </ul>	0
<b>Operating current of auxiliary contacts at AC-15</b>	
<ul style="list-style-type: none"> <li>maximum</li> </ul>	3 A
<b>Operating current of auxiliary contacts as NC contact at AC-15</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	3 A
<ul style="list-style-type: none"> <li>at 250 V</li> </ul>	3 A
<b>Operating current of auxiliary contacts as NO contact at AC-15</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	3 A
<ul style="list-style-type: none"> <li>at 250 V</li> </ul>	3 A
<b>Operating current of auxiliary contacts at DC-13</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> </ul>	1 A
<ul style="list-style-type: none"> <li>at 125 V</li> </ul>	0.2 A
<ul style="list-style-type: none"> <li>at 250 V</li> </ul>	0.1 A

### Inputs/ Outputs

<b>Product function</b>	
<ul style="list-style-type: none"> <li>at the relay outputs Switchover delayed/without delay</li> </ul>	No
<ul style="list-style-type: none"> <li>non-volatile</li> </ul>	No

### Electromagnetic compatibility

<b>EMI immunity</b>	
<ul style="list-style-type: none"> <li>acc. to IEC 61812-1</li> </ul>	EN 61000-6-2
<b>Conducted interference</b>	
<ul style="list-style-type: none"> <li>due to burst acc. to IEC 61000-4-4</li> </ul>	2 kV network connection / 1 kV control connection
<ul style="list-style-type: none"> <li>due to conductor-earth surge acc. to IEC 61000-4-5</li> </ul>	2 kV
<ul style="list-style-type: none"> <li>due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul>	1 kV
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m












<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	4 kV contact discharge / 8 kV air discharge
<b>Safety related data</b>	
<b>Protection against electrical shock</b>	finger-safe
<b>Type of insulation</b>	Basic insulation
<b>Category acc. to EN 954-1</b>	none
<b>Connections/ Terminals</b>	
<b>Product function</b>	No
<ul style="list-style-type: none"> <li>removable terminal for auxiliary and control circuit</li> </ul>	
<b>Type of electrical connection</b>	screw-type terminals
<ul style="list-style-type: none"> <li>for auxiliary and control current circuit</li> </ul>	
<b>Type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>solid</li> </ul>	1x (0.5 ... 4.0 mm <sup>2</sup> ), 2x (0.5 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>at AWG conductors solid</li> </ul>	2x (20 ... 14)
<ul style="list-style-type: none"> <li>at AWG conductors stranded</li> </ul>	2x (20 ... 14)
<b>Connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>solid</li> </ul>	0.5 ... 4 m <sup>2</sup>
<ul style="list-style-type: none"> <li>finely stranded with core end processing</li> </ul>	0.5 ... 2.5 m <sup>2</sup>
<b>AWG number as coded connectable conductor cross section</b>	
<ul style="list-style-type: none"> <li>solid</li> </ul>	18 ... 14
<ul style="list-style-type: none"> <li>stranded</li> </ul>	18 ... 14
<b>Installation/ mounting/ dimensions</b>	
<b>Mounting position</b>	any
<b>Mounting type</b>	clip-on
<b>Height</b>	46 mm
<b>Width</b>	33 mm
<b>Depth</b>	73 mm
<b>Required spacing</b>	
<ul style="list-style-type: none"> <li>with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> </ul> </li> </ul>	0 m 0 m 0 m 0 m 0 m  0 m 0 m 0 m 0 m

- downwards 0 m
- for live parts
- forwards 0 m
- Backwards 0 m
- upwards 0 m
- downwards 0 m
- at the side 0 m

### Ambient conditions

<b>Installation altitude at height above sea level</b>	
• maximum	2 000 m
<b>Relative humidity</b>	
• during operation	15 ... 95 %

### Certificates/ approvals

<b>General Product Approval</b>			<b>EMC</b>	<b>Functional Safety/Safety of Machinery</b>	
					<a href="#">Type Examination Certificate</a>
CCC	CSA	UL		RCM	
<b>Declaration of Conformity</b>	<b>Test Certificates</b>	<b>Marine / Shipping</b>			
	<a href="#">Miscellaneous</a>	<a href="#">Special Test Certificate</a>	<a href="#">Type Test Certificates/Test Report</a>		
EG-Konf.				ABS	PRS
<b>Marine / Shipping</b>	<b>other</b>		<b>Railway</b>		
			<a href="#">Confirmation</a>	<a href="#">Miscellaneous</a>	<a href="#">Special Test Certificate</a>
RINA	RMRS	DNV-GL DNVGL.COM/AF			

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

[www.siemens.com/sirius/catalogs](http://www.siemens.com/sirius/catalogs)

**Industry Mall (Online ordering system)**


<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1926-2EC11>


**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1926-2EC11>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1926-2EC11>

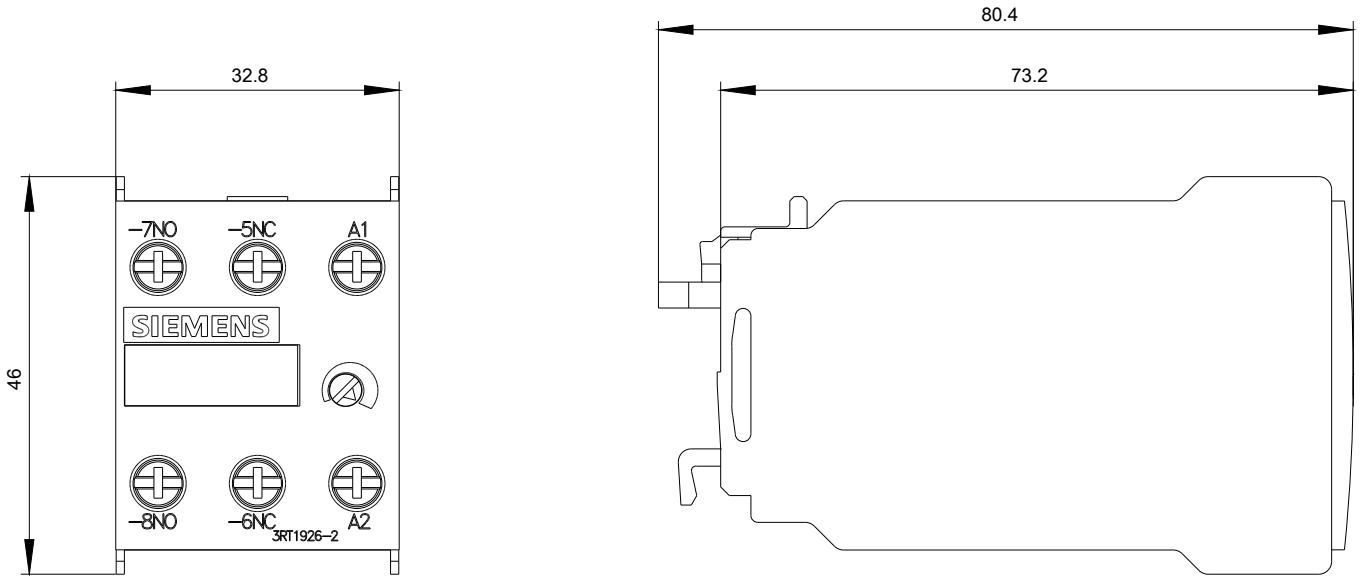

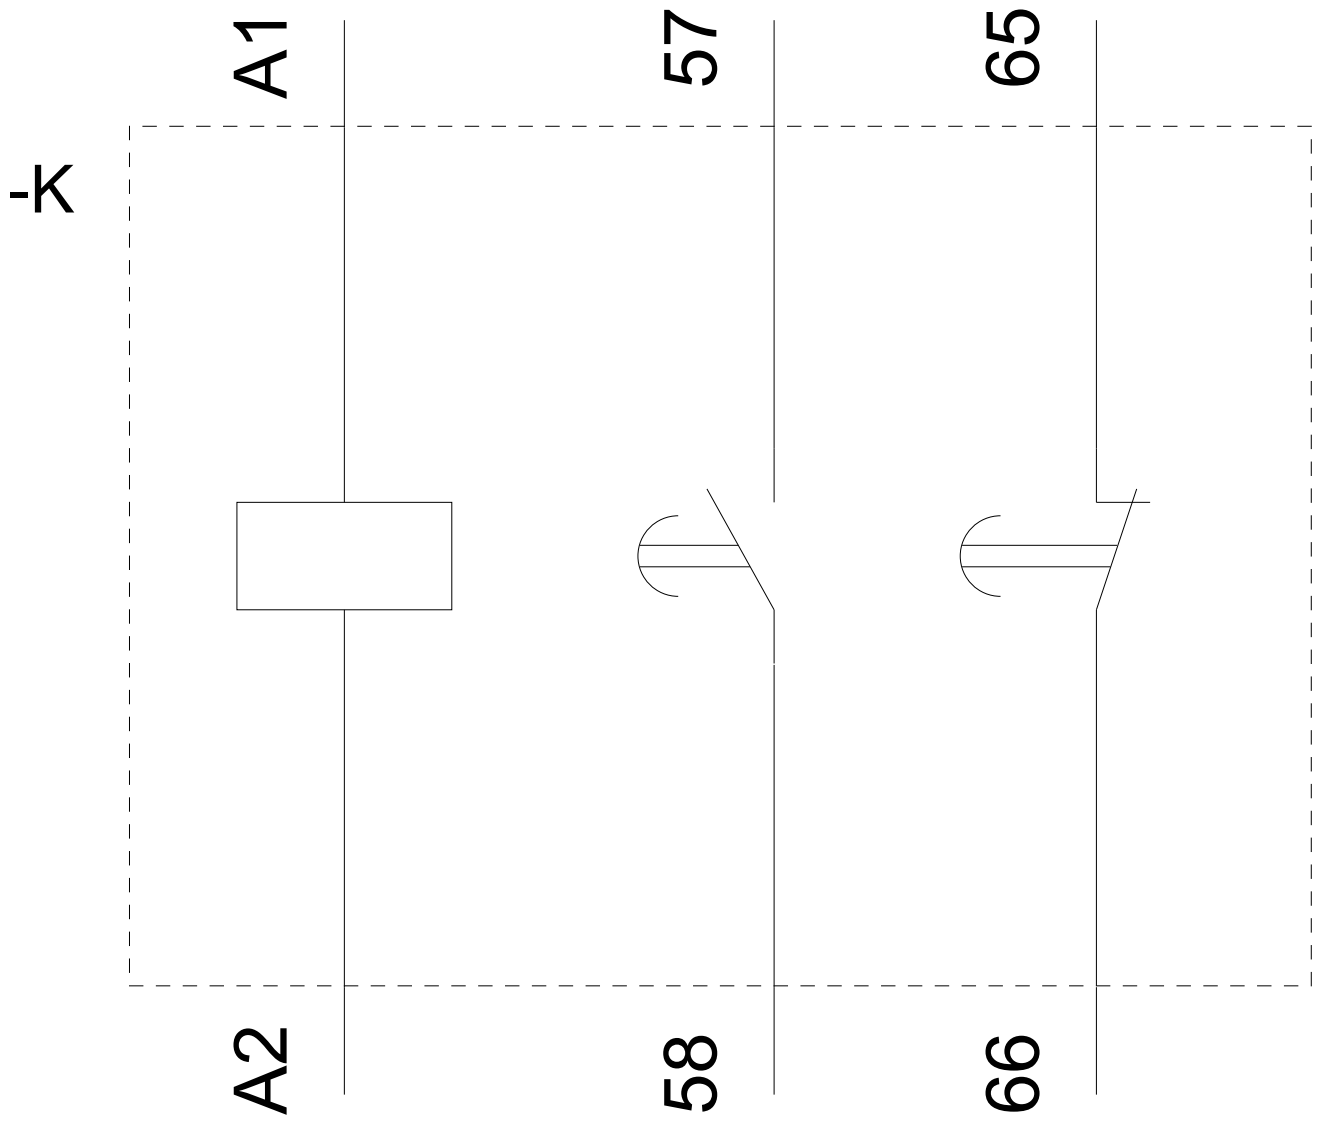

last modified:

11/28/2019