

## Switching Devices – Contactors and Contactor Assemblies – Special Applications

**NEW**

Click on the Article No. in the catalog PDF to access it in the Industry Mall and get all related information.

Article-No.

3RA1943-2C  
3RA1943-2B  
3RA1953-2B  
3RA1953-2N



Or directly in the Internet, e. g.  
[www.siemens.com/  
product?3RA1943-2C](http://www.siemens.com/product?3RA1943-2C)

**Price groups**

PG 41B, 41H

**4/2 Introduction****Contactors for special applications**

- 4/4 SIRIUS 3RT14 contactors for resistive loads (AC-1), 3-pole, 140 ... 690 A
- 4/12 SIRIUS 3RT23 contactors for resistive loads (AC-1), 4-pole, 4 NO, 18 ... 110 A **NEW**
- 4/19 SIRIUS 3RT13 contactors for resistive loads (AC-1), 4-pole, 4 NO, 110 ... 140 A
- 4/22 3TK1 contactors for resistive loads (AC-1), 4-pole, 4 NO, 200 ... 1000 A
- 4/26 3TK20 contactors, 4-pole, 4 kW
- 4/34 SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC, 4 ... 22 kW **NEW**
- 4/40 SIRIUS 3RT26 capacitor contactors, 12.5 ... 75 kvar **NEW**
- Contactors with extended operating range  $0.7 \dots 1.25 \times U_s$  for railway applications
- 4/49 SIRIUS 3RT20 motor contactors, up to 37 kW **NEW**
- 4/54 SIRIUS 3RT10 motor contactors, 30 ... 45 kW
- 4/57 3TB5 motor contactors, 55 ... 200 kW
- 4/59 3TC contactors for switching DC voltage, 2-pole
- Ch. 5 SIRIUS 3RH21 contactor relays
- Ch. 5 3TH4 contactor relays
- Contactors for switching DC voltage
- 4/61 3TC contactors, 1- and 2-pole, 32 ... 400 A

**Coupling contactors**

- Ch. 3 SIRIUS 3RT20 coupling contactors (interface), 3-pole, 3 ... 15 kW
- Ch. 5 SIRIUS 3RH21 coupling contactors for switching auxiliary circuits, 4-pole

**Power relays/Miniature contactors**

- 4/71 3TG10 contactors, 4-pole, 4 kW

Notes:

3RT1 contactors in sizes S00/S0 to S12 can be found

- in the Catalog Add-On IC 10 AO · 2015 at the Information and Download Center
- in the interactive Catalog CA 01
- in the Industry Mall

Conversion tool

e.g. from 3RT13 to 3RT23, see [www.siemens.com/sirius/conversion-tool](http://www.siemens.com/sirius/conversion-tool)



# Switching Devices – Contactors and Contactor Assemblies

## Contactors for Special Applications

### Introduction

### Overview



Size  
Type

**S00**  
3RT231, 3RT251

**S0**  
3RT232, 3RT252

#### 4-pole 3RT23, 3RT25 contactors

Type		<b>3RT2316</b>	<b>3RT2317</b>	<b>3RT2516</b>	<b>3RT2517</b>	<b>3RT2518</b>	<b>3RT2325</b>	<b>3RT2326</b>	<b>3RT2327</b>	<b>3RT2526</b>
Number of main contacts		4 NO		2 NO + 2 NC			4 NO			2 NO + 2 NC
AC, DC operation		(p. 4/15, 4/17)		(p. 4/36, 4/38)			(p. 4/15, 4/17)			(p. 4/36, 4/38)
<b>AC-1</b>										
$I_e$ at 690 V [40 °C/60 °C]	A	18 / 16	22 / 20	18 / 16	22 / 20	22 / 20	35 / 30	40 / 35	50 / 42	40 / 35
<b>P</b>	40 °C kW	<b>12</b>	<b>14.5</b>	<b>11</b>	<b>13</b>	<b>13</b>	<b>22</b>	<b>26</b>	<b>33</b>	<b>26</b>
	60 °C kW	11	13	6.5	7.5	7.5	20	23	28	15
<b>AC-2 and AC-3</b>										
$I_e$ at 400 V	NO A	9	12	9	12	16	15.5	15.5	15.5	25
	NC A	--	--	9	9	9	--	--	--	25 (20) <sup>1)</sup>
<b>P at 400 V</b> (NC for DC oper.)	NO / NC kW	<b>4</b>	<b>5.5</b>	<b>4</b>	<b>5.5 / 4</b>	<b>7.5 / 4</b>	<b>7.5</b>	<b>7.5</b>	<b>7.5</b>	<b>11 (7.5)<sup>1)</sup></b>
	at 230 V NO / NC kW	2.2	3	3	3 / 2.2	4 / 2.2	4	4	4	5.5

#### Accessories for contactors

<b>Auxiliary switch blocks</b>	<b>3RH2911</b>	(Chap. 3)	<b>3RH2911, 3RH2921</b>	(Chap. 3)
<b>Timing relay blocks</b>	<b>3RA281.</b>	(Chap. 3)	<b>3RA281.</b>	(Chap. 3)
<b>Surge suppressors</b>	<b>3RT2916</b>	(Chap. 3)	<b>3RT2926</b>	(Chap. 3)

<sup>1)</sup> The value in brackets applies to the NC for DC operation.



Size  
Type

**S2**  
3RT233, 3RT253

**S3**  
3RT134.

**S6, S10, S12**  
3RT145.

#### 4-pole 3RT23, 3RT25, 3RT13, 3RT15 contactors • 3-pole 3RT14 contactors

Type		<b>3RT2336</b>	<b>3RT2337</b>	<b>3RT2535</b>	<b>3RT2536</b>	<b>3RT1344</b>	<b>3RT1346</b>	<b>3RT1446</b>	<b>3RT1456</b>	<b>3RT1466</b>	<b>3RT1476</b>
Number of main contacts		4 NO		2 NO + 2 NC		4 NO		3 NO	3 NO		
AC, DC operation		(p. 4/16, 4/18)		(p. 4/37, 4/39)		(p. 4/21)		(p. 4/10)	(p. 4/10)		
<b>AC-1 (≤ 690 V)</b>											
$I_e$	40 °C A	<b>60</b>	<b>110</b>	<b>60</b>	<b>70</b>	<b>110</b>	<b>140</b>	<b>140</b>	<b>275</b>	<b>400</b>	<b>690</b>
	60 °C A	55	95	55	60	100	120	130	250	380	650
<b>P at 400 V</b>	40 °C kW	<b>36</b>	<b>63</b>	<b>36</b>	<b>39</b>	<b>72</b>	<b>92</b>	<b>92</b>	<b>180</b>	<b>263</b>	<b>454</b>
	at 230 V 40 °C kW	21	36	21	23	42	53	53	105	151	261
	at 500 V 40 °C kW	--	--	--	--	--	--	115	225	329	568
	at 690 V kW	--	--	--	--	--	--	159	310	454	783
	at 1 000 V 60 °C kW	--	--	--	--	--	--	98	165	247	410
<b>AC-2 and AC-3</b>											
$I_e$ /400 V	A	--	--	35	41	--	--	44	97	138	170
<b>P at 400 V</b>	kW	--	--	<b>18.5</b>	<b>22</b>	--	--	<b>22</b>	<b>55</b>	<b>75</b>	<b>90</b>
	at 230 V kW	--	--	11	11	--	--	12.7	30	37	55
	at 500 V kW	--	--	--	--	--	--	29.9	55	90	110
	at 690 V kW	--	--	--	--	--	--	38.2	90	132	160

#### Accessories for contactors

<b>Auxiliary switch blocks</b>	<b>3RH2921</b>	(Chap. 3)		
<b>Terminal covers</b>	--	(Chap. 3)	<b>3RT1946-4EA1/2</b>	(Chap. 3) <b>3RT1956-4EA1/2/3</b> (Chap. 3)
<b>Box terminal blocks</b>	--		--	<b>3RT1955/56-4G</b> (Chap. 3)
<b>Surge suppressors</b>	<b>3RT2926/36</b>	(Chap. 3)	<b>3RT1926/36</b>	(Chap. 3) <b>3RT1956-1C</b> (Chap. 3)

# Switching Devices – Contactors and Contactor Assemblies

## Contactors for Special Applications

### Introduction



Size	--								00	--
Type	3TK1								3TK20	3TG10
4-pole 3TK, 3TG contactors										
Type	3TK10	3TK11	3TK12	3TK13	3TK14	3TK15	3TK17	3TK20	3TG10	
Number of main contacts	4 NO							4	4	
AC, DC operation	(p. 4/24)							(p. 4/32)	(p. 4/73)	
AC-1 (40 °C, ≤ 690 V)										
$I_e$	A	200	250	300	350	550	800	1000	18	20
<b>P at 400 V</b>	<b>kW</b>	<b>132</b>	<b>165</b>	<b>197</b>	<b>230</b>	<b>362</b>	<b>527</b>	<b>658</b>	<b>10</b>	<b>13</b>
at 230 V	kW	76	95	114	132	308	303	378	6	7.5
at 500 V	kW	165	206	247	288	452	658	828	13	--
at 690 V	kW	227	284	341	397	624	908	1135	17	--
AC-2 and AC-3										
$I_e/400 V$	A	120	145	210	210	400	550	700	8.4	8.4
<b>P at 400 V</b>	<b>kW</b>	<b>55</b>	<b>75</b>	<b>110</b>	<b>110</b>	<b>200</b>	<b>280</b>	<b>370</b>	<b>4</b>	<b>4</b>
at 127 V	kW	--	--	--	--	--	--	--	1.4	--
at 230 V	kW	30	45	75	75	110	160	220	2.5	--
at 500 V	kW	--	--	--	--	--	--	--	4	--
at 690 V	kW	--	--	--	--	--	--	--	4	--
Accessories for contactors										
Auxiliary switch blocks	On front	3TK1910							--	--
	Lateral								--	--
Terminal covers	3TK1940		3TK1942		3TK1944		3TK1946	--		--
Surge suppressors	3TK1930				3TK1934			3TX4490 (Chap. 3)		--

#### Note:

Safety characteristics for contactors, see Chapter 16, "Appendix" → "Standards and Approvals"

#### Connection methods

The contactors are available with screw terminals (box terminals or flat connectors) or with spring-type terminals.

Devices of the 3TK2 series are also available for connection with flat connectors and solder pin connectors.

As an option the devices of the 3RT2 series are also available for connection with ring terminal lugs, particularly versions for North America and Japan.



Screw terminals



Spring-type terminals



Flat connectors



Solder pin connections



Ring terminal lug connections

The terminals are indicated in the corresponding tables by the symbols shown on orange backgrounds.

#### Support function

The 3RT20 contactors can also be ordered via an online configurator.



Configurator available in the Industry Mall

The online configurator is indicated in the corresponding tables by the symbol shown on an orange background.

#### Use of 3RT2 contactors with IE3 motors

##### Note:

For the use of 3RT2 contactors in conjunction with highly energy-efficient IE3 motors, please observe the information on dimensioning and configuring, see "Configuration Manual for SIRIUS Controls with IE3 Motors" <http://support.automation.siemens.com/WW/view/en/94770820>

More information, see page 1/3.

## Contactors for Special Applications

### SIRIUS 3RT14 contactors for resistive loads (AC-1), 3-pole, 140 ... 690 A

#### Overview

##### Standards

IEC 60947-1, EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1,  
IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The contactors are suitable for use in any climate. They are finger-safe according to EN 50274.

3RT14 contactors are used for switching resistive loads (AC-1) or as contactors that normally only have to carry the current, for example for variable-speed operating mechanisms.

##### Size S3: AC or DC operation

##### Sizes S6 to S12: UC operating mechanism (AC 50/60 Hz and DC)




The following applies for sizes S6 to S12:

- Withdrawable coils
- Integrated coil circuit (varistor)
- Auxiliary and control conductors: Screw terminals
- Main conductors: busbar connections

Accessories for the 3RT10 contactors can also be used here.

For a general description of sizes S3 to S12, see [Chapter 3](#), "Power contactors for switching motors" → "SIRIUS 3RT10 contactors, 3-pole, 15 ... 250 kW"

#### Technical specifications

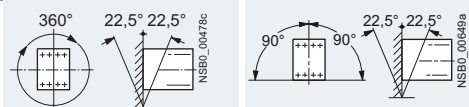Type					
Size					
Dimensions (W x H x D)					
• with mounted auxiliary switch block					
		<b>3RT1446</b>	<b>3RT1456</b>	<b>3RT1466</b>	<b>3RT1476</b>
		<b>S3</b>	<b>S6</b>	<b>S10</b>	<b>S12</b>
		70 x 146 x 134	120 x 172 x 170	145 x 210 x 202	160 x 214 x 225
		70 x 146 x 183	120 x 172 x 217	145 x 210 x 251	160 x 214 x 271
<b>General technical specifications</b>					
<b>Permissible mounting position</b>					
The contactors are designed for operation on a vertical mounting surface.					
3RT1446: for DC operation and up to 22.5° inclination in front, the coil operating range is reduced to 0.85 ... 1.1 x U <sub>s</sub>					
Upright mounting position					
		Special version required			
<b>Mechanical endurance</b>	Operating cycles	10 million			
<b>Electrical endurance for utilization category AC-1 at I<sub>e</sub></b>	Operating cycles	0.5 million			
<b>Rated insulation voltage U<sub>i</sub></b> (Pollution degree 3)	V	1 000			
<b>Rated impulse withstand voltage U<sub>imp</sub></b>	kV	6		8	
<b>Protective separation</b> between the coil and the main contacts Acc. to IEC 60947-1, Appendix N	V	690			
<b>Mirror contacts</b>					
A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact.					
• Removable auxiliary switch block		Yes, acc. to IEC 60947-4-1, Appendix F			
• Permanently fitted auxiliary switch block		Acc. to Swiss regulations (SUVA) on request		--	
<b>Permissible ambient temperature</b>					
• During operation	°C	-25 ... +60		-25 ... +60	
• During operation, with AS-Interface interface	°C	--		-25 ... +55	
• During storage	°C	-55 ... +80		-55 ... +80	
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C		IP20		IP00/open	
• Connection range		IP00 (where applicable, use additional terminal covers)			
<b>Touch protection</b> acc. to EN 50274		Finger-safe only for vertical contact from the front			
<b>Shock resistance</b>					
• Rectangular pulse, for AC and DC operation	g/ms	6.8/5 and 4/10		8.5/5 and 4.2/10	
• Sine pulse, for AC and DC operation	g/ms	10.6/5 and 6.2/10		13.4/5 and 6.5/10	
<b>Conductor cross-sections</b>		1)		1)	
<b>Electromagnetic compatibility (EMC)</b>		--		2)	

1) Conductor cross-sections, see [pages 4/8 and 4/9](#).

2) Electromagnetic compatibility, see "SIRIUS 3RT10 Contactors", Chapter 3.

# Contactors for Special Applications

## SIRIUS 3RT14 contactors for resistive loads (AC-1), 3-pole, 140 ... 690 A

Type		3RT1446	3RT1456	3RT1466	3RT1476
Size		S3	S6	S10	S12
<b>Short-circuit protection</b>					
<b>Main circuit</b>					
• Fuse links, operational class gG: LV HRC, type 3NA - Type of coordination "1"	A	250	355	500	800
• Fuse links, gR operational class: SITOP, type 3NE - Type of coordination "2"	A	250	350	500	710
<b>Auxiliary circuit</b>					
Short-circuit test					
• with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current $I_k = 1 \text{ kA acc. to IEC 60947-5-1}$	A	10			
• with miniature circuit breakers with C characteristic with short-circuit current $I_k = 400 \text{ A}$	A	10			
<b>Control circuit</b>					
<b>Solenoid coil operating range (AC/DC)</b>		$0.8 \dots 1.1 \times U_s^{1)}$		$0.8 \times U_{s \text{ min}} \dots 1.1 \times U_{s \text{ max}}$	
<b>Power consumption of the solenoid coils</b> (for cold coil and $1.0 \times U_s$ )					
<b>Standard version:</b>					
• AC operation, 50 Hz	Closing	VA	270	--	
	p.f.		0.68	--	
	Closed	VA	22	--	
	p.f.		0.27	--	
• AC operation, 50/60 Hz	Closing	VA	298/274	--	
	p.f.		0.7/0.62	--	
	Closed	VA	27/20	--	
	p.f.		0.29/0.31	--	
<b>For USA and Canada:</b>					
• AC operation, 50 Hz	Closing	VA	270	--	
	p.f.		0.68	--	
	Closed	VA	22	--	
	p.f.		0.27	--	
• AC operation, 60 Hz	Closing	VA	300	--	
	p.f.		0.52	--	
	Closed	VA	21	--	
	p.f.		0.29	--	
• DC operation	Closing = Closed	W	15	--	
<b>Power consumption of the solenoid operation</b> (when coil is cold and rated range $U_{s \text{ min}} \dots U_{s \text{ max}}$ )					
• Conventional operating mechanisms					
- AC operation	Closing at $U_{s \text{ min}}$	VA/p.f.	--	250/0.9	490/0.9
	Closing at $U_{s \text{ max}}$	VA/p.f.	--	300/0.9	590/0.9
	Closed at $U_{s \text{ min}}$	VA/p.f.	--	4.8/0.8	5.6/0.9
	Closed at $U_{s \text{ max}}$	VA/p.f.	--	5.8/0.8	6.7/0.9
- DC operation	Closing at $U_{s \text{ min}}$	W	--	300	540
	Closing at $U_{s \text{ max}}$	W	--	360	650
	Closed at $U_{s \text{ min}}$	W	--	4.3	6.1
	Closed at $U_{s \text{ max}}$	W	--	5.2	7.4
• Solid-state operating mechanism					
- AC operation	Closing at $U_{s \text{ min}}$	VA/p.f.	--	190/0.8	400/0.8
	Closing at $U_{s \text{ max}}$	VA/p.f.	--	280/0.8	530/0.8
	Closed at $U_{s \text{ min}}$	VA/p.f.	--	3.5/0.5	4/0.5
	Closed at $U_{s \text{ max}}$	VA/p.f.	--	4.4/0.4	5/0.4
- DC operation	Closing at $U_{s \text{ min}}$	W	--	250	440
	Closing at $U_{s \text{ max}}$	W	--	320	580
	Closed at $U_{s \text{ min}}$	W	--	2.3	3.2
	Closed at $U_{s \text{ max}}$	W	--	2.8	3.8
<b>PLC control input</b> (IEC 61131-2, type 2)		V DC		24, at $\leq 30 \text{ mA}$ power consumption	
• Operating range		V DC		17 ... 30	
<b>Operating times for <math>0.8 \dots 1.1 \times U_s^{1)}</math></b> Total break time = Opening delay + Arcing time					
• AC operation	- Closing delay	ms	17 ... 90	--	
	- Opening delay	ms	10 ... 25	--	
• DC operation	- Closing delay	ms	90 ... 230	--	
	- Opening delay	ms	14 ... 20	--	
• Arcing time		ms	10 ... 15	--	
<b>Operating times for <math>1.0 \times U_s^{1)}</math></b>					
• AC operation	- Closing delay	ms	18 ... 30	--	
	- Opening delay	ms	11 ... 23	--	
• DC operation	- Closing delay	ms	100 ... 120	--	
	- Opening delay	ms	16 ... 20	--	

<sup>1)</sup> For DC operation and up to 22.5° inclination in front, the coil operating range is reduced to  $0.85 \dots 1.1 \times U_s$  (see also permissible mounting position, page 4/4).

<sup>2)</sup> The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (varistor +2 to 5 ms, diode assembly: 2 to 6 times).

## Contactors for Special Applications

### SIRIUS 3RT14 contactors for resistive loads (AC-1), 3-pole, 140 ... 690 A

Type			3RT1446	3RT1456	3RT1466	3RT1476
Size			S3	S6	S10	S12
<b>Control circuit</b>						
<b>Operating times</b> (Total break time = Opening delay + Arcing time)						
• Conventional operating mechanisms						
- for $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	Closing delay	ms	--	20 ... 95	30 ... 95	45 ... 100
	Opening delay	ms	--	40 ... 60	40 ... 80	60 ... 100
- for $U_{s \min} \dots U_{s \max}$	Closing delay	ms	--	25 ... 50	35 ... 50	50 ... 70
	Opening delay	ms	--	40 ... 60	50 ... 80	70 ... 100
• Solid-state operating mechanism, actuated via A1/A2						
- for $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	Closing delay	ms	--	95 ... 135	105 ... 145	120 ... 150
	Opening delay	ms	--	80 ... 90	80 ... 100	80 ... 100
- for $U_{s \min} \dots U_{s \max}$	Closing delay	ms	--	100 ... 120	110 ... 130	125 ... 150
	Opening delay	ms	--	80 ... 90	80 ... 100	80 ... 100
• Solid-state operating mechanism, actuated via PLC input						
- for $0.8 \times U_{s \min} \dots 1.1 \times U_{s \max}$	Closing delay	ms	--	35 ... 75	45 ... 80	60 ... 90
	Opening delay	ms	--	80 ... 90	80 ... 100	80 ... 100
- for $U_{s \min} \dots U_{s \max}$	Closing delay	ms	--	40 ... 60	50 ... 65	65 ... 80
	Opening delay	ms	--	80 ... 90	80 ... 100	80 ... 100
• Arcing time						
		ms	--	10 ... 15	10 ... 15	10 ... 15

Type			3RT1446	3RT1456	3RT1466	3RT1476
Size			S3	S6	S10	S12
<b>Main circuit</b>						
<b>Load rating with AC</b>						
<b>Utilization category AC-1</b> <b>Switching resistive loads</b>						
• Rated operational currents $I_e$	at 40 °C up to 690 V	A	140	275	400	690
	at 60 °C up to 690 V	A	130	250	380	650 <sup>1)</sup>
	at 1 000 V	A	60	100	150	250
• Rated power for AC loads <sup>2)</sup> with p.f. = 0.95 (at 60 °C)	at 230 V	kW	50	95	145	245
	400 V	kW	86	165	250	430
	500 V	kW	107	205	315	535
	690 V	kW	148	285	430	740
	1 000 V	kW	98	165	247	410
• Minimum conductor cross-section for loads with $I_e$	at 40 °C	mm <sup>2</sup>	50	2 x 70	240	2 x 240
	at 0 °C	mm <sup>2</sup>	50	120	240	2 x 240
<b>Utilization categories AC-2 and AC-3</b> with an electrical endurance of 1.3 million operating cycles						
• Rated operational current $I_e$	up to 690 V	A	44	97	138	170
• Rated power for slipping or squirrel-cage motors at 50 and 60 Hz (at 60 °C)	at 230 V	kW	12.7	30	37	55
	400 V	kW	22	55	75	90
	500 V	kW	29.9	55	90	110
	690 V	kW	38.2	90	132	160
<b>Power loss per conducting path</b>						
	at $I_e/AC-1$	W	12.5	20	27	55

<sup>1)</sup> 600 A for 3RT1476-N contactor.

<sup>2)</sup> Industrial furnaces and electric heaters with resistance heating, etc.  
(increased power consumption on heating up has been taken into account).




# Contactors for Special Applications

## SIRIUS 3RT14 contactors for resistive loads (AC-1), 3-pole, 140 ... 690 A

Type			3RT1446	3RT1456	3RT1466	3RT1476
Size			S3	S6	S10	S12
<b>Main circuit</b>						
<b>Load rating with DC</b>						
<b>Utilization category DC-1</b>						
<b>Switching resistive loads (<math>L/R \leq 1</math> ms)</b>						
• Rated operational currents $I_e$ (at 60 °C)						
- 1 conducting path	up to 24 V	A	130	250	380	500
	60 V	A	80	250	380	500
	110 V	A	12	18	33	33
	220 V	A	2.5	3.4	3.8	3.8
	440 V	A	0.8	0.8	0.9	0.9
	600 V	A	0.48	0.5	0.6	0.6
- 2 conducting paths in series	up to 24 V	A	130	250	380	500
	60 V	A	130	250	380	500
	110 V	A	130	250	380	500
	220 V	A	13	20	380	500
	440 V	A	2.4	3.2	4	4
	600 V	A	1.3	1.6	2	2
- 3 conducting paths in series	up to 24 V	A	130	250	380	500
	60 V	A	130	250	380	500
	110 V	A	130	250	380	500
	220 V	A	130	250	380	500
	440 V	A	6	11.5	11	11
	600 V	A	3.4	4	5.2	5.2
<b>Utilization category DC-3/DC-5</b>						
<b>Shunt-wound and series-wound motors (<math>L/R \leq 15</math> ms)</b>						
• Rated operational currents $I_e$ (at 60 °C)						
- 1 conducting path	up to 24 V	A	6	250	380	500
	60 V	A	3	7.5	11	11
	110 V	A	1.25	2.5	3	3
	220 V	A	0.35	0.6	0.6	0.6
	440 V	A	0.15	0.17	0.18	0.18
	600 V	A	0.1	0.12	0.125	0.125
- 2 conducting paths in series	up to 24 V	A	130	250	380	500
	60 V	A	130	250	380	500
	110 V	A	130	250	380	500
	220 V	A	1.75	2.5	2.5	2.5
	440 V	A	0.42	0.65	0.65	0.65
	600 V	A	0.27	0.37	0.37	0.37
- 3 conducting paths in series	up to 24 V	A	130	250	380	500
	60 V	A	130	250	380	500
	110 V	A	130	250	380	500
	220 V	A	4	250	380	500
	440 V	A	0.8	1.4	1.4	1.4
	600 V	A	0.45	0.75	0.75	0.75
<b>Switching frequency</b>						
<b>Switching frequency <math>z</math> in operating cycles/hour</b>						
• Contactors without overload relays						
	No-load switching frequency AC	1/h	5 000	2 000		
	No-load switching frequency DC	1/h	1 000	2 000		
• Rated operation						
	Acc. to AC-1 (AC/DC)	1/h	650	600		
	Acc. to AC-3 (AC/DC)	1/h	1 000	1 000		
Dependence of the switching frequency $z'$ on the operational current $I'$ and operational voltage $U$ :						
$z' = z \cdot (I_e/I') \cdot (400 \text{ V}/U)^{1.5} \cdot 1/\text{h}$						

## Contactors for Special Applications

### SIRIUS 3RT14 contactors for resistive loads (AC-1), 3-pole, 140 ... 690 A

Type	3RT1446		
Size	S3		
Conductor cross-sections			
Main conductors (1 or 2 conductors can be connected)		Screw terminals	
Box terminals			
Terminal screws		M6 (hexagon socket, A/F 4)	
• Tightening torque	Nm	4 ... 6	
	lb.in	36 ... 53	
Front clamping point connected			
 NSBU_00479	• Finely stranded with end sleeve	mm²	2.5 ... 50
	• Finely stranded without end sleeve	mm²	10 ... 50
	• Solid	mm²	2.5 ... 16
	• Stranded	mm²	10 ... 70
	• AWG cables, solid or stranded	AWG	10 ... 2/0
	• Ribbon cable conductors	mm	6 x 9 x 0.8
	(Number x Width x Thickness)		
Rear clamping point connected			
 NSBU_00480	• Finely stranded with end sleeve	mm²	2.5 ... 50
	• Finely stranded without end sleeve	mm²	10 ... 50
	• Solid	mm²	2.5 ... 16
	• Stranded	mm²	10 ... 70
	• AWG cables, solid or stranded	AWG	10 ... 2/0
	• Ribbon cable conductors	mm	6 x 9 x 0.8
	(Number x Width x Thickness)		
Both clamping points connected			
 NSBU_00481	• Finely stranded with end sleeve	mm²	2 x (2.5 ... 35)
	• Finely stranded without end sleeve	mm²	2 x (10 ... 35)
	• Solid	mm²	2 x (2.5 ... 16)
	• Stranded	mm²	2 x (10 ... 50)
	• AWG cables, solid or stranded	AWG	2 x (10 ... 1/0)
	• Ribbon cable conductors	mm	2 x (6 x 9 x 0.8)
	(Number x Width x Thickness)		
Busbar connection (bored copper bars)			
Connecting bar (max. width) <sup>1)</sup>	mm	10	
Cable lug connection (without box terminals) <sup>2)</sup>			
• Finely stranded with cable lug	mm²	10 ... 50 <sup>3)</sup>	
• Stranded with cable lug	mm²	10 ... 70 <sup>3)</sup>	
• AWG cables, solid or stranded	AWG	7 ... 1/0	
• Terminal screws		M6	
Auxiliary conductors			
• Solid	mm²	2 x (0.5 ... 1.5) <sup>4)</sup> ; 2 x (0.75 ... 2.5) <sup>4)</sup> according to IEC 60947; max. 2 x (0.75 ... 4) <sup>4)</sup>	
• Finely stranded with end sleeve	mm²	2 x (0.5 ... 1.5) <sup>4)</sup> ; 2 x (0.75 ... 2.5) <sup>4)</sup>	
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) <sup>4)</sup> ; 2 x (18 ... 14) <sup>4)</sup> ; 1 x 12	
• Terminal screws		M3	
- Tightening torque	Nm	0.8 ... 1.2	
	lb.in	7 ... 10.3	

<sup>1)</sup> If bars larger than 12 x 10 mm are connected, a 3RT1946-4EA1 terminal cover is needed to comply with the phase clearance, see "Accessories for 3RT10 Contactors", page 3/121

<sup>2)</sup> If conductors larger than 25 mm<sup>2</sup> are connected, a 3RT1946-4EA1 terminal cover is needed to comply with the phase clearance, see "Accessories for 3RT10 Contactors", page 3/121




<sup>3)</sup> Only with crimped cable lugs according to DIN 46234. Cable lug max. 20 mm wide.

<sup>4)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.



# Contactors for Special Applications

## SIRIUS 3RT14 contactors for resistive loads (AC-1), 3-pole, 140 ... 690 A

Type			3RT1456	3RT1466	3RT1476	
Size			S6	S10	S12	
Conductor cross-sections						
Main conductors (1 or 2 conductors can be connected)			Screw terminals			
With mounted box terminals			Type	3RT1955-4G	3RT1956-4G	3RT1966-4G
Terminal screws				M10 (hexagon socket, A/F 4)	M10 (hexagon socket, A/F 4)	M12 (hexagon socket, A/F 5)
• Tightening torque			Nm	10 ... 12	10 ... 12	20 ... 22
			lb.in	90 ... 110	90 ... 110	180 ... 195
Front clamping point connected						
 NSBU_0047/9	• Finely stranded with end sleeve	mm²	16 ... 70	16 ... 120	70 ... 240	
	• Finely stranded without end sleeve	mm²	16 ... 70	16 ... 120	70 ... 240	
	• Stranded	mm²	16 ... 70	16 ... 120	95 ... 300	
	• AWG cables, solid or stranded	AWG	6 ... 2/0	6 ... 250 kcmil	3/0 ... 600 kcmil	
	• Ribbon cable conductors (Number x Width x Thickness)	mm	Min. 3 x 9 x 0.8, max. 6 x 15.5 x 0.8	Min. 3 x 9 x 0.8, max. 10 x 15.5 x 0.8	Min. 6 x 9 x 0.8, max. 20 x 24 x 0.5	
Rear clamping point connected						
 NSBU_0046/0	• Finely stranded with end sleeve	mm²	16 ... 70	16 ... 120	120 ... 185	
	• Finely stranded without end sleeve	mm²	16 ... 70	16 ... 120	120 ... 185	
	• Stranded	mm²	16 ... 70	16 ... 120	120 ... 240	
	• AWG cables, solid or stranded	AWG	6 ... 2/0	6 ... 250 kcmil	250 ... 500 kcmil	
	• Ribbon cable conductors (Number x Width x Thickness)	mm	Min. 3 x 9 x 0.8, max. 6 x 15.5 x 0.8	Min. 3 x 9 x 0.8, max. 10 x 15.5 x 0.8	Min. 6 x 9 x 0.8, max. 20 x 24 x 0.5	
Both clamping points connected <sup>1)</sup>						
 NSBU_0046/1	• Finely stranded with end sleeve	mm²	Max. 1 x 50, 1 x 70	Max. 1 x 95, 1 x 120	Min. 2 x 50, max. 2 x 185	
	• Finely stranded without end sleeve	mm²	Max. 1 x 50, 1 x 70	Max. 1 x 95, 1 x 120	Min. 2 x 50, max. 2 x 185	
	• Stranded	mm²	Max. 1 x 50, 1 x 70	Max. 1 x 95, 1 x 120	Min. 2 x 70, max. 2 x 240	
	• AWG cables, solid or stranded	AWG	Max. 2 x 1/0	Max. 2 x 3/0	Min. 2 x 2/0, max. 2 x 500 kcmil	
	• Ribbon cable conductors (Number x Width x Thickness)	mm	Max. 2 x (6 x 15.5 x 0.8)	Max. 2 x (10 x 15.5 x 0.8)	Max. 2 x (20 x 24 x 0.5)	
Busbar connections						
• Connecting bar (max. width)			mm	17	25	
Cable lug connection						
				2)	3)	
• Finely stranded with cable lug			mm²	16 ... 95	50 ... 240	
• Stranded with cable lug			mm²	25 ... 120	70 ... 240	
• AWG cables, solid or stranded			AWG	4 ... 250 kcmil	2/0 ... 500 kcmil	
• Terminal screws				M8 x 25 (A/F 13)	M10 x 30 (A/F 17)	
- Tightening torque			Nm	10 ... 14	14 ... 24	
			lb.in	90 ... 124	124 ... 210	
Auxiliary conductors						
• Solid			mm²	2 x (0.5 ... 1.5) <sup>4)</sup> , 2 x (0.75 ... 2.5) <sup>4)</sup> according to IEC 60947; max. 2 x (0.75 ... 4) <sup>4)</sup>		
• Finely stranded with end sleeve			mm²	2 x (0.5 ... 1.5) <sup>4)</sup> ; 2 x (0.75 ... 2.5) <sup>4)</sup>		
• AWG cables, solid or stranded			AWG	2 x (18 ... 14)		
• Terminal screws				M3 (PZ 2)		
- Tightening torque			Nm	0.8 ... 1.2		
			lb.in	7 ... 10.3		
Auxiliary conductors <sup>5)</sup>				Spring-type terminals		
• Operating devices <sup>6)</sup>				3.0 x 0.5; 3.5 x 0.5		
• Solid			mm²	2 x (0.25 ... 2.5)		
• Finely stranded with end sleeve			mm²	2 x (0.25 ... 1.5)		
• Finely stranded without end sleeve			mm²	2 x (0.25 ... 2.5)		
• AWG cables, solid or stranded			AWG	2 x (24 ... 14)		

<sup>1)</sup> Minimum cross-section 16 mm<sup>2</sup>.

<sup>2)</sup> 3RT1456: When connecting cable lugs according to EN 46235, use 3RT1956-4EA1 terminal cover for conductor cross-sections from 95 mm<sup>2</sup> to keep the phase clearance, see "Accessories for 3RT10 Contactors", on page 3/121

<sup>3)</sup> 3RT1466 and 3RT1476: When connecting cable lugs according to EN 46234, the 3RT1966-4EA1 terminal cover must be used for conductor cross-sections of 240 mm<sup>2</sup> and more as well as EN 46235 for conductor cross-sections of 185 mm<sup>2</sup> and more to keep the phase clearance. See "Accessories for 3RT10 Contactors", on page 3/121

<sup>4)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

<sup>5)</sup> Max. external diameter of the conductor insulation: 3.6 mm.  
An "insulation stop" must be used for conductor cross-sections ≤ 1 mm<sup>2</sup>, see "Accessories for 3RT10 Contactors", on page 3/122

<sup>6)</sup> Tool for opening the spring-type terminals, see "Accessories for 3RT10 contactors" on page 3/122

## Contactors for Special Applications

### SIRIUS 3RT14 contactors for resistive loads (AC-1), 3-pole, 140 ... 690 A

#### Selection and ordering data

##### Size S3: AC or DC operation

- Coil circuits (varistors, diodes etc.) can be retrofitted
- Auxiliary switches can be retrofitted
- Main and control conductors: screw terminals




3RT1446-1A...0

Size	Rated data AC-1, $T_U$ : 40 °C	Ratings of AC loads (p.f. = 0.95) at				Auxiliary contacts Version	Rated control supply voltage $U_s$	DT	Screw terminals	PU (UNIT, SET, M)	PS*	PG
	Operational current $I_e$								Article No.	Price per PU		
	Up to 690 V	230 V	400 V	500 V	690 V	NO	NC	V				
A		kW	kW	kW	kW							


For screw fixing and snap-on mounting onto  
TH 35 and TH 75 standard mounting rail

#### AC operation



S3	140	53	92	115	159	--	--	AC 24, 50 Hz	B	3RT1446-1AB00	1	1 unit	41B
								AC 110, 50 Hz	B	3RT1446-1AF00	1	1 unit	41B
								AC 230, 50 Hz	▶	3RT1446-1AP00	1	1 unit	41B

#### DC operation



S3	140	53	92	115	159	--	--	24 DC	▶	3RT1446-1BB40	1	1 unit	41B
								220 DC	B	3RT1446-1BM40	1	1 unit	41B

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, see "SIRIUS 3RT10 contactors",  
[Chapter 3](#).

# Contactors for Special Applications

## SIRIUS 3RT14 contactors for resistive loads (AC-1), 3-pole, 140 ... 690 A

### **Sizes S6 to S12: UC operating mechanism · AC/DC operation (50/60 Hz and DC)**


- Withdrawable coils with integrated coil switch (varistor)
- Auxiliary and control conductors: screw terminals
- Main conductors: busbar connections



3RT146.

Size	Rated data AC-1, $T_U: 40^\circ\text{C}$ Operational current $I_e$	Ratings of AC loads (p.f. = 0.95) at				Auxiliary contacts Version		Rated control supply voltage $U_s$	DT	Screw terminals	Price per PU	PU (UNIT, SET, M)	PS*	PG
	up to <b>690 V</b>	230 V	400 V	500 V	690 V					Article No.				
	<b>A</b>	kW	kW	kW	kW	NO	NC	V						


### Conventional operating mechanisms



<b>S6</b>	<b>275</b>	105	180	225	310	2	2	110 ... 127 220 ... 240	▶	<b>3RT1456-6AF36</b> <b>3RT1456-6AP36</b>		1 1	1 unit 1 unit	41B 41B
<b>S10</b>	<b>400</b>	151	263	329	454	2	2	110 ... 127 220 ... 240	▶	<b>3RT1466-6AF36</b> <b>3RT1466-6AP36</b>		1 1	1 unit 1 unit	41B 41B
<b>S12</b>	<b>690</b>	261	454	568	783	2	2	110 ... 127 220 ... 240	▶	<b>3RT1476-6AF36</b> <b>3RT1476-6AP36</b>		1 1	1 unit 1 unit	41B 41B


### Solid-state operating mechanism

#### For 24 V DC PLC output



<b>S6</b>	<b>275</b>	105	180	225	310	2	2	96 ... 127 200 ... 277	B A	<b>3RT1456-6NF36</b> <b>3RT1456-6NP36</b>		1 1	1 unit 1 unit	41B 41B
<b>S10</b>	<b>400</b>	151	263	329	454	2	2	96 ... 127 200 ... 277	B A	<b>3RT1466-6NF36</b> <b>3RT1466-6NP36</b>		1 1	1 unit 1 unit	41B 41B
<b>S12</b>	<b>690</b>	261	454	568	783	2	2	96 ... 127 200 ... 277	B A	<b>3RT1476-6NF36</b> <b>3RT1476-6NP36</b>		1 1	1 unit 1 unit	41B 41B

#### For 24 V DC PLC relay output, with remaining lifetime indicator (RLT)



<b>S6</b>	<b>275</b>	105	180	225	310	1	1	96 ... 127 200 ... 277	B B	<b>3RT1456-6PF35</b> <b>3RT1456-6PP35</b>		1 1	1 unit 1 unit	41B 41B
<b>S10</b>	<b>400</b>	151	263	329	454	1	1	200 ... 277	B	<b>3RT1466-6PP35</b>		1	1 unit	41B
<b>S12</b>	<b>690</b>	261	454	568	783	1	1	200 ... 277	B	<b>3RT1476-6PP35</b>		1	1 unit	41B

Other voltages according to page 4/48 on request.

Accessories and spare parts, see "SIRIUS 3RT10 contactors", Chapter 3.

## Contactors for Special Applications

### SIRIUS 3RT23 contactors for resistive loads (AC-1), 4-pole, 4 NO, 18 ... 110 A

#### Overview

##### Standards

IEC 60947-1, EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1,  
IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The contactors are suitable for use in any climate. They are finger-safe according to EN 50274.

Accessories and spare parts, see "3RT20 Contactors", Chapter 3.

With sizes S0 and S2, two auxiliary contacts 1 NO + 1 NC are included in the basic version.

##### Mountable auxiliary contacts

###### Size S00

4 auxiliary contacts, including no more than 3 NC.

###### Sizes S0 and S2

4 additional auxiliary contacts, including no more than 2 NC.



#### Application

The contactors are suitable:

- For switching resistive loads
- For isolating systems with ungrounded or poorly grounded neutral conductors
- For system transfers when alternative AC power supplies are used
- For use as contactors which only carry current and do not have to switch in case of inductive loads – e.g. variable-speed operating mechanisms
- For switching mixed loads in distribution systems (e.g. for supplying heaters, lamps, motors, PC power supply units) with p.f. > 0.8 according to IEC 60947-4-1, test conditions for utilization category AC-1



For a general description of sizes S00 to S2, see Chapter 3, "Power Contactors for Switching Motors" → "SIRIUS 3RT20 contactors, 3-pole, up to 37 kW"

#### Technical specifications

Type		3RT2316	3RT2317	3RT2325	3RT2326	3RT2327	3RT2336	3RT2337
Size		S00		S0			S2	
General technical specifications								
Permissible mounting position								
The contactors are designed for operation on a vertical mounting surface								
Upright mounting position		 Special version required						
Mechanical endurance	Operating cycles	30 million	10 million					
Electrical endurance at $I_e$ /AC-1	Operating cycles	Approx. 0.5 million						
Rated insulation voltage $U_i$ (Pollution degree 3)	V	690						
Permissible ambient temperature								
• During operation	°C	-25 ... +60						
• During storage	°C	-55 ... +80						
Degree of protection acc. to IEC 60947-1, Appendix C		IP20						
Touch protection acc. to EN 50274		Finger-safe						
Short-circuit protection								
Main circuit								
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1								
• Type of coordination "1"	A	35		63				on request
• Type of coordination "2"	A	20		20				on request
• Weld-free	A	10		16				on request

# Contactors for Special Applications

## SIRIUS 3RT23 contactors for resistive loads (AC-1), 4-pole, 4 NO, 18 ... 110 A

Type			3RT2316	3RT2317	3RT2336	3RT2337
Size			S00		S2	
Dimensions (W x H x D) <sup>1)</sup>		mm	45 x 57.5 x 73 / 45 x 70 x 73		74.5 x 113.5 x 130 / 74.5 x 113.5 x 130	
• with mounted auxiliary switch block		mm	45 x 57.5 x 116 / 45 x 70 x 121		74.5 x 113.5 x 173.5 / 74.5 x 113.5 x 177.5	
Type			3RT2325	3RT2326	3RT2327	
Size			S0			
Dimensions (W x H x D) for AC operation <sup>1)2)</sup>		mm	60 x 85 x 97 / 60 x 101.5 x 97			
• with mounted auxiliary switch block		mm	60 x 85 x 141 / 60 x 101.5 x 144			
Dimensions (W x H x D) for DC operation <sup>1)2)</sup>		mm	60 x 85 x 107 / 60 x 101.5 x 107			
• with mounted auxiliary switch block		mm	60 x 85 x 151 / 60 x 101.5 x 154			

1) Dimensions for devices with screw terminals/spring-type terminals.

2) For size S0, devices for AC and DC operation differ in depth. The following applies: Depth (DC) = Depth (AC) + 10 mm.

Type			3RT2316	3RT2317	3RT2325	3RT2326	3RT2327	3RT2336	3RT2337
Size			S00		S0			S2	
<b>Control circuit</b>									
<b>Solenoid coil operating range</b>									
• AC operation	at 50 Hz		0.8 ... 1.1 x $U_s$	0.8 ... 1.1 x $U_s$					
	at 60 Hz		0.85 ... 1.1 x $U_s$	0.8 ... 1.1 x $U_s$					
• DC operation	at 50 °C		0.8 ... 1.1 x $U_s$					--	
	at 60 °C		0.85 ... 1.1 x $U_s$					--	
• AC/DC operation			--					0.8 x $U_{smin...}$ 1.1 x $U_{smax}$	
<b>Power consumption of the solenoid coils</b> (for cold coil and 1.0 x $U_s$ )									
• AC operation, 50 Hz, standard version									
- Closing	VA	--		77				190	
- p.f.		--		0.82				0.72	
- Closed	VA	--		9.8				16	
- p.f.		--		0.25				0.37	
• AC operation, 50/60 Hz, standard version									
- Closing	VA	27/24.3	37/33	81/79				210/188	
- p.f.		0.8/0.75	0.8/0.75	0.72/0.74				0.69/0.65	
- Closed	VA	4.2/3.3	5.7/4.4	10.5/8.5				17.2/16.5	
- p.f.		0.25/0.25	0.25/0.25	0.25/0.28				0.36/0.39	
• AC operation, 60 Hz, USA, Canada									
- Closing	VA	31.7	43	87				212	
- p.f.		0.77	0.77	0.76				0.67	
- Closed	VA	4.8	6.5	9.4				18.5	
- p.f.		0.25	0.25	0.28				0.37	
• AC/DC operation									
- Closing for AC operation	VA	--						40	
- p.f.		--						0.64/0.5	
- Closed for AC operation	VA	--						2	
- p.f.		--						1	
- Closing for DC operation	W	--						25	
- Closed for DC operation	W	--						1	
• DC operation (closing = closed)	W	4		5.9				--	
<b>Operating times for 0.8 ... 1.1 x <math>U_s</math><sup>1)</sup></b> Total break time = Opening delay + Arcing time									
• AC operation									
- Closing delay	ms	8 ... 35	8 ... 33	9 ... 38	8 ... 40			10 ... 80	
- Opening delay	ms	3.5 ... 14	4 ... 15	4 ... 16	4 ... 16			10 ... 18	
• DC operation									
- Closing delay	ms	30 ... 100		50 ... 170				--	
- Opening delay	ms	7 ... 13		15 ... 17.5				--	
• AC/DC operation									
- Closing delay	ms	--						50 ... 110	
- Opening delay	ms	--						35 ... 55	
• Arcing time	ms	10 ... 15		10				10 ... 20	

1) With size S00, DC operation: Operating times for 0.85 ... 1.1 x  $U_s$

## Contactors for Special Applications

### SIRIUS 3RT23 contactors for resistive loads (AC-1), 4-pole, 4 NO, 18 ... 110 A

Type			3RT2316	3RT2317	3RT2325	3RT2326	3RT2327	3RT2336	3RT2337
Size			S00		S0			S2	
<b>Main circuit</b>									
<b>Load rating with AC</b>									
<b>Utilization category AC-1</b>									
<b>Switching resistive loads</b>									
• Rated operational currents $I_e$	at 40 °C, up to 690 V	A	18	22	35	40	50	60	110
	at 60 °C, up to 690 V	A	16	20	30	35	42	55	95
• Rated power for AC loads	at 230 V	kW	6	7.5	11	13	16	21	36
p.f. = 0.95 (at 60 °C)	400 V	kW	10.5	13	20	23	28	36	63
• Minimum conductor cross-section	at 40 °C	mm <sup>2</sup>	2.5		10			16	35
for loads with $I_e$	at 60 °C	mm <sup>2</sup>	2.5		10			25	50
<b>Utilization categories AC-2 and AC-3</b>									
• Rated operational currents $I_e$	at 60 °C, up to 400 V	A	9	12	15.5			--	
• Rated power for	at 230 V	kW	2.2	3	4			--	
slipping or squirrel-cage motors	400 V	kW	4	5.5	7.5			--	
<b>Load rating with DC</b>									
<b>Utilization category DC-1</b>									
<b>Switching resistive loads (<math>L/R \leq 1</math> ms)</b>									
• Rated operational currents $I_e$ (at 60 °C)									
- 1 conducting path	up to 24 V	A	16	20	30	35	42	55	95
	60 V	A	16	20	20			23	23
	110 V	A	2.1		4.5			4.5	4.5
	220 V	A	0.8		1			1	
	440 V	A	0.6		0.4			0.4	
- 2 conducting paths in series	up to 24 V	A	16	20	30	35	42	55	
	60 V	A	16	20	30	35	42	55	
	110 V	A	12		30	35	42	45	
	220 V	A	1.6		1			5	
	440 V	A	0.8		1			1	
- 3 conducting paths in series	up to 24 V	A	16	20	30	35	42	55	
	60 V	A	16	20	30	35	42	55	
	110 V	A	16	20	30	35	42	45	
	220 V	A	16	20	30	35	42	45	
	440 V	A	1.3		2.9			2.9	
- 4 conducting paths in series	up to 24 V	A	16	20	30	35	42	55	65
	60 V	A	16	20	30	35	42	55	65
	110 V	A	16	20	30	35	42	45	55
	220 V	A	16	20	30	35	42	45	55
	440 V	A	1.3		2.9			2.9	3.5
<b>Utilization category DC-3/DC-5</b>									
<b>Shunt-wound and series-wound motors (<math>L/R \leq 15</math> ms)</b>									
• Rated operational currents $I_e$ (at 60 °C)									
- 1 conducting path	up to 24 V	A	16	20	20			20	
	60 V	A	0.5		5				
	110 V	A	0.15		2.5			2.5	
	220 V	A	--		1			1	
	440 V	A	--		0.09			0.1	
- 2 conducting paths in series	up to 24 V	A	16	20	30	35	42	55	
	60 V	A	5		30	35	42	45	
	110 V	A	0.35		15			25	
	220 V	A	--		3			5	
	440 V	A	--		0.27			0.27	
- 3 conducting paths in series	up to 24 V	A	16	20	30	35	42	55	
	60 V	A	16	20	30	35	42	55	
	110 V	A	16	20	30	35	42	45	
	220 V	A	1.5		10			25	
	440 V	A	0.2		0.6			0.6	
- 4 conducting paths in series	up to 24 V	A	16	20	30	35	42	55	65
	60 V	A	16	20	30	35	42	55	65
	110 V	A	16	20	30	35	42	45	55
	220 V	A	1.5		30	35	42	25	55
	440 V	A	0.2		0.6			0.6	0.8

## SIRIUS 3RT23 contactors for resistive loads (AC-1), 4-pole, 4 NO, 18 ... 110 A

## Selection and ordering data

## AC operation

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B




3RT231.-1A.00



3RT231.-2A.00




3RT232.-1A.00



3RT232.-2A.00

Rated data AC-1, $T_U$ : 40/60 °C		Auxiliary contacts		Rated control supply voltage $U_s$	DT	Screw terminals		DT	Spring-type terminals	
Operational current $I_e$ up to	Ratings of AC loads (p.f. = 0.95) at 50 Hz and	Ident. No.	Version			Article No.	Price per PU		Article No.	Price per PU
690 V	<b>400 V</b>									
A	<b>kW</b>									


For screw fixing and snap-on mounting onto  
TH 35 standard mounting rail

Size S00<sup>1)</sup>

18 / 16	<b>12 / 11</b>	--	--	--	24, 50/60 Hz	B	<b>3RT2316-1AB00</b>	B	<b>3RT2316-2AB00</b>
					110, 50/60 Hz	B	<b>3RT2316-1AF00</b>	B	<b>3RT2316-2AF00</b>
					230, 50/60 Hz	B	<b>3RT2316-1AP00</b>	A	<b>3RT2316-2AP00</b>
22 / 20	<b>14.5 / 13</b>	--	--	--	24, 50/60 Hz	B	<b>3RT2317-1AB00</b>	B	<b>3RT2317-2AB00</b>
					110, 50/60 Hz	B	<b>3RT2317-1AF00</b>	B	<b>3RT2317-2AF00</b>
					230, 50/60 Hz	▶	<b>3RT2317-1AP00</b>	A	<b>3RT2317-2AP00</b>

## Size S0

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



35 / 30 <sup>2)</sup>	<b>22 / 20</b>	<b>11</b>	1	1	24, 50 Hz	B	<b>3RT2325-1AB00</b>	B	<b>3RT2325-2AB00</b>
					110, 50 Hz	B	<b>3RT2325-1AF00</b>	B	<b>3RT2325-2AF00</b>
					230, 50 Hz	A	<b>3RT2325-1AP00</b>	A	<b>3RT2325-2AP00</b>
40 / 35 <sup>2)</sup>	<b>26 / 23</b>	<b>11</b>	1	1	24, 50 Hz	B	<b>3RT2326-1AB00</b>	B	<b>3RT2326-2AB00</b>
					110, 50 Hz	B	<b>3RT2326-1AF00</b>	B	<b>3RT2326-2AF00</b>
					230, 50 Hz	A	<b>3RT2326-1AP00</b>	A	<b>3RT2326-2AP00</b>
50 <sup>2)</sup>	<b>33 / 28</b>	<b>11</b>	1	1	24, 50 Hz	B	<b>3RT2327-1AB00</b>	B	<b>3RT2327-2AB00</b>
					110, 50 Hz	B	<b>3RT2327-1AF00</b>	B	<b>3RT2327-2AF00</b>
					230, 50 Hz	A	<b>3RT2327-1AP00</b>	A	<b>3RT2327-2AP00</b>

<sup>1)</sup> For size S00: Coil operating range  
 at 50 Hz: 0.8 ... 1.1 x  $U_s$   
 at 60 Hz: 0.85 ... 1.1 x  $U_s$

<sup>2)</sup> Minimum conductor cross-section 10 mm<sup>2</sup>.

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, see "SIRIUS 3RT20 contactors",  
Chapter 3.

## Contactors for Special Applications



### SIRIUS 3RT23 contactors for resistive loads (AC-1), 4-pole, 4 NO, 18 ... 110 A

#### AC operation

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B




3RT233.-1A.00

Rated data AC-1, $T_U$ : 40/60 °C		Auxiliary contacts		Rated control supply voltage $U_s$	DT	Screw terminals	DT	Spring-type terminals for auxiliary and control circuits	
Operational current $I_e$ up to	Ratings of AC loads (p.f. = 0.95) at 50 Hz and	Ident. No.	Version			Article No.	Price per PU	Article No.	Price per PU
690 V	<b>400 V</b>								
A	<b>kW</b>		NO	NC	V AC				



For screw fixing and snap-on mounting onto TH 35 standard mounting rail

#### Size S2 **NEW**

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



60 / 55	<b>36</b>	<b>11</b>	1	1	24, 50 Hz 110, 50 Hz 230, 50 Hz	B B ▶	<b>3RT2336-1AB00</b> <b>3RT2336-1AF00</b> <b>3RT2336-1AP00</b>	-- -- --
110 / 95	<b>63</b>	<b>11</b>	1	1	24, 50 Hz 110, 50 Hz 230, 50 Hz	B B ▶	<b>3RT2337-1AB00</b> <b>3RT2337-1AF00</b> <b>3RT2337-1AP00</b>	-- -- --


Rated data			Auxiliary contacts		Rated control supply voltage	DT	Screw terminals	DT	Spring-type terminals
AC-2/AC-3, $T_U$ : up to 60 °C		AC-1, $T_U$ : 40/60 °C	Ident. No.	Version	$U_s$				
Operational current $I_e$	Ratings of three-phase motors at 50 Hz and	Operational current $I_e$ up to							
at 400 V	<b>400 V</b>	690 V							
A	<b>kW</b>	A	NO	NC	V AC				

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

#### Size S2 **NEW**

#### Version for motor loads AC-3

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



50	<b>22</b>	60/55	<b>11</b>	1	1	230, 50 Hz	B	<b>3RT2336-1AP00-4AA0</b>	--
----	-----------	-------	-----------	---	---	------------	---	---------------------------	----

Other voltages according to page 4/48 on request.

Accessories and spare parts, see "SIRIUS 3RT20 contactors", Chapter 3.



# Contactors for Special Applications

## SIRIUS 3RT23 contactors for resistive loads (AC-1), 4-pole, 4 NO, 18 ... 110 A

### DC operation

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B



3RT231.-1B.40



3RT231.-2B.40



3RT232.-1B.40




3RT232.-2B.40

Rated data AC-1, $T_U$ : 40/60 °C Operational current $I_e$ up to 690 V A		Ratings of AC loads (p.f. = 0.95) at 50 Hz and 400 V kW		Auxiliary contacts Ident. No. Version NO NC		Rated control supply voltage $U_s$ V DC	DT <b>Screw terminals</b>	DT <b>Spring-type          terminals</b>
Article No.		Price per PU		Article No.		Price per PU		

For screw fixing and snap-on mounting onto  
 TH 35 standard mounting rail


### Size S00



18 / 16	12 / 11	--	--	--	24 220	A	3RT2316-1BB40	▶	3RT2316-2BB40
						B	3RT2316-1BM40		3RT2316-2BM40
22 / 20	14.5 / 13	--	--	--	24 220	▶	3RT2317-1BB40	▶	3RT2317-2BB40
						B	3RT2317-1BM40		3RT2317-2BM40

### Size S0

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



35 / 30 <sup>1)</sup>	22 / 20	11	1	1	24 220	A	3RT2325-1BB40	A	3RT2325-2BB40
						B	3RT2325-1BM40	B	3RT2325-2BM40
40 / 35 <sup>1)</sup>	26 / 23	11	1	1	24 220	A	3RT2326-1BB40	A	3RT2326-2BB40
						B	3RT2326-1BM40	B	3RT2326-2BM40
50 <sup>1)</sup>	33 / 28	11	1	1	24 220	A	3RT2327-1BB40	A	3RT2327-2BB40
						B	3RT2327-1BM40	B	3RT2327-2BM40

<sup>1)</sup> Minimum conductor cross-section 10 mm².

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, see "SIRIUS 3RT20 contactors",  
[Chapter 3](#).

## Contactors for Special Applications



### SIRIUS 3RT23 contactors for resistive loads (AC-1), 4-pole, 4 NO, 18 ... 110 A

#### AC/DC operation (50/60 Hz and DC)

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B



3RT233.-1N.30


Rated data AC-1, $T_U$ : 40/60 °C		Auxiliary contacts		Rated control supply voltage $U_s$	DT	Screw terminals	DT	Spring-type terminals for auxiliary and control circuits	
Operational current $I_e$ up to	Ratings of AC loads (p.f. = 0.95) at 50 Hz and	Ident. No.	Version			Article No.	Price per PU	Article No.	Price per PU
690 V	<b>400 V</b>								
A	<b>kW</b>		NO NC	V AC/DC					

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

#### Size S2 **NEW**

##### With integrated coil circuit (varistor)

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



60 / 55	<b>36</b>	<b>11</b>	1	1	20 ... 33 175 ... 280	► B	<b>3RT2336-1NB30</b> <b>3RT2336-1NP30</b>	--
110 / 95	<b>63</b>	<b>11</b>	1	1	20 ... 33 175 ... 280	B	<b>3RT2337-1NB30</b> <b>3RT2337-1NP30</b>	--

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B

Rated data AC-2/AC-3, $T_U$ : up to 60 °C			Auxiliary contacts		Rated control supply voltage $U_s$	DT	Screw terminals	DT	Spring-type terminals for auxiliary and control circuits	
Operational current $I_e$	Ratings of three-phase motors at 50 Hz and	Operational current $I_e$ up to	Ident. No.	Version			Article No.	Price per PU	Article No.	Price per PU
at 400 V	<b>400 V</b>	690 V								
A	<b>kW</b>	A		NO NC	V AC/DC					


For screw fixing and snap-on mounting onto TH 35 standard mounting rail

#### Size S2 **NEW**

##### Version for motor loads AC-3

##### With integrated coil circuit (varistor)

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



50	<b>22</b>	60/55	<b>11</b>	1	1	20 ... 33	B	<b>3RT2336-1NB30-4AA0</b>	--
----	-----------	-------	-----------	---	---	-----------	---	---------------------------	----

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, see "SIRIUS 3RT20 contactors", Chapter 3.

## SIRIUS 3RT13 contactors for resistive loads (AC-1), 4-pole, 4 NO, 110 ... 140 A

## Overview

## Standards

IEC 60947-1, EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1,  
IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The contactors are suitable for use in any climate. They are finger-safe according to EN 50274.

The accessories for the 3-pole SIRIUS 3RT10 contactors can also be used for the 4-pole versions.

The contactors are suitable for switching mixed loads in distribution systems (e.g. for supplying heaters, lamps, motors, PC power supply units) with p.f. > 0.8 according to IEC 60947-4-1, test conditions for utilization category AC-1.

## Technical specifications

Type					
Size					
Dimensions (W x H x D)					
• AC operation					
- with mounted auxiliary switch block					
• DC operation					
- with mounted auxiliary switch block					
<b>General technical specifications</b>					
<b>Permissible mounting position<sup>1)</sup></b>					
<b>Mechanical endurance</b>					
Operating cycles				10 million	
<b>Electrical endurance at <math>I_e</math>/AC-1</b>					
Operating cycles				Approx. 0.5 million	
<b>Rated insulation voltage <math>U_i</math></b> (Pollution degree 3)					
V				690	
<b>Permissible ambient temperature</b>					
• During operation				°C	-25 ... +60
• During storage				°C	-55 ... +80
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C					
• Connection range				IP20	
				IP00 (see also additional terminal covers)	
<b>Touch protection</b> acc. to EN 50274					
				Finger-safe only for vertical contact from the front	
<b>Short-circuit protection</b>					
<b>Main circuit</b>					
Fuse links, operational class gG: LV HRC, 3NA; DIAZED, 5SB; NEOZED, 5SE according to IEC 60947-4-1/EN 60947-4-1					
• Type of coordination "1" <sup>1)</sup>				A	250
• Type of coordination "2" <sup>1)</sup>				A	125
• Weld-free				A	63
<b>Control circuit</b>					
<b>Solenoid coil operating range (AC/DC)</b>					
				0.8 ... 1.1 x $U_s$	
<b>Power consumption of the solenoid coils</b> (for cold coil and 1.0 x $U_s$ )					
• AC operation, 50 Hz					
- Closing				VA	270
- p.f.				VA	0.68
- Closed				VA	22
- p.f.				VA	0.27
• AC operation, 50/60 Hz					
- Closing				VA	298/274
- p.f.					0.72/0.62
- Closed				VA	27/20
- p.f.					0.29/0.31
• DC operation					
- Closing				W	15
= Closed					
<b>Operating times for 0.8 ... 1.1 x <math>U_s</math><sup>2)</sup></b> Total break time = Opening delay + Arcing time					
• DC operation					
- Closing delay				ms	110 ... 200
- Opening delay				ms	14 ... 20
• AC operation					
- Closing delay				ms	20 ... 50
- Opening delay				ms	10 ... 25
• Arcing time				ms	10 ... 15

<sup>1)</sup> In accordance with the corresponding 3-pole 3RT1 contactors.

<sup>2)</sup> With size S00, DC operation: Operating times for 0.85 ... 1.1 x  $U_s$

## Contactors for Special Applications

### SIRIUS 3RT13 contactors for resistive loads (AC-1), 4-pole, 4 NO, 110 ... 140 A

Type			<b>3RT1344</b>	<b>3RT1346</b>
Size			<b>S3</b>	
<b>Main circuit</b>				
<b>Load rating with AC</b>				
<b>Utilization category AC-1</b>				
<b>Switching resistive loads</b>				
• Rated operational currents $I_e$	at 40 °C, up to 690 V	A	110	140
	at 60 °C, up to 690 V	A	100	120
• Rated power for AC loads	at 230 V	kW	42	53
p.f. = 0.95 (at 40 °C)	400 V	kW	72	92
• Minimum conductor cross-section	at 40 °C	mm <sup>2</sup>	50	50
for loads with $I_e$	60 °C	mm <sup>2</sup>	50	50
<b>Utilization categories AC-2 and AC-3</b>				
• Rated operational currents $I_e$	at 60 °C, up to 400 V	A	--	--
• Rated power for	at 230 V	kW	--	--
slipring or squirrel-cage motors	400 V	kW	--	--
at 50 and 60 Hz				
<b>Maximum breaking current AC</b>				
(e.g. for isolation of load distributions)				
• at 50 and 60 Hz	at 400 V	A	520	760
<b>Load rating with DC</b>				
<b>Utilization category DC-1</b>				
<b>Switching resistive loads (<math>L/R \leq 1</math> ms)</b>				
• Rated operational currents $I_e$ (at 40 °C)				
- 1 conducting path	up to 24 V	A	70	80
	60 V	A	23	60
	110 V	A	4.5	9
	220 V	A	1	2
	440 V	A	0.4	0.6
- 2 conducting paths in series	up to 24 V	A	70	80
	60 V	A	70	80
	110 V	A	70	80
	220 V	A	5	10
	440 V	A	1	1.8
- 3 conducting paths in series	up to 24 V	A	70	80
	60 V	A	70	80
	110 V	A	70	80
	220 V	A	70	80
	440 V	A	2.9	4.5
- 4 conducting paths in series	up to 24 V	A	70	80
	60 V	A	70	80
	110 V	A	70	80
	220 V	A	70	80
	440 V	A	2.9	4.5
<b>Utilization category DC-3/DC-5</b>				
<b>Shunt-wound and series-wound motors (<math>L/R \leq 15</math> ms)</b>				
• Rated operational currents $I_e$ (at 40 °C)				
- 1 conducting path	up to 24 V	A	20	20
	60 V	A	6	6.5
	110 V	A	2.5	2.5
	220 V	A	1	1
	440 V	A	0.15	0.15
- 2 conducting paths in series	up to 24 V	A	70	80
	60 V	A	70	80
	110 V	A	70	80
	220 V	A	7	7
	440 V	A	0.42	0.42
- 3 conducting paths in series	up to 24 V	A	70	80
	60 V	A	70	80
	110 V	A	70	80
	220 V	A	35	35
	440 V	A	0.8	0.8
- 4 conducting paths in series	up to 24 V	A	70	80
	60 V	A	70	80
	110 V	A	70	80
	220 V	A	70	80
	440 V	A	0.8	0.8

# Contactors for Special Applications

## SIRIUS 3RT13 contactors for resistive loads (AC-1), 4-pole, 4 NO, 110 ... 140 A

### Selection and ordering data

#### AC or DC operation, 4 NO



3RT134.-1...0


Rated data AC-1, $T_U$ : 40/60 °C	Rated control supply voltage $U_s$	DT	Screw terminals	PU (UNIT, SET, M)	PS*	PG
Operational current $I_e$ up to 690 V	Ratings of AC loads (p.f. = 0.95) at 50 Hz and <b>400 V</b>		Article No.	Price per PU		
A	kW	V				

#### For screw fixing and snap-on mounting onto TH 35 standard mounting rail

##### Size S3

##### AC operation


50 Hz AC



110 / 100	<b>72 / 66</b>	24 110 230	B B ▶	<b>3RT1344-1AB00</b> <b>3RT1344-1AF00</b> <b>3RT1344-1AP00</b>	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
140 / 120	<b>92 / 79</b>	24 110 230	B B ▶	<b>3RT1346-1AB00</b> <b>3RT1346-1AF00</b> <b>3RT1346-1AP00</b>	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B

##### DC operation

DC



110 / 100	<b>72 / 66</b>	24 220	B B	<b>3RT1344-1BB40</b> <b>3RT1344-1BM40</b>	1 1	1 unit 1 unit	41B 41B
140 / 120	<b>92 / 79</b>	24 220	B B	<b>3RT1346-1BB40</b> <b>3RT1346-1BM40</b>	1 1	1 unit 1 unit	41B 41B

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, see "SIRIUS 3RT10 contactors",  
[Chapter 3](#).

## Contactors for Special Applications

### 3TK1 contactors for resistive loads (AC-1), 4-pole, 4 NO, 200 ... 1000 A

#### Overview

##### Standards

IEC 60947-1, EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1,  
IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The contactors also comply with the requirements of the standards NFC 63-110 and NFC 20-040.

The contactors are suitable for use in any climate. They are finger-safe according to EN 50274. Terminal covers may have to be fitted onto the connecting bars, depending on the configuration with other devices.

The contactors are used mainly for resistive loads (AC-1 and p.f. > 0.95). They are also suitable for switching mixed loads in distribution systems (e.g. for supplying heaters, lamps, motors, PC power supply units) with p.f. > 0.8 according to IEC 60947-4-1, test conditions for utilization category AC-1.

##### Control circuit

The solenoid coils of the 3TK10 to 3TK13 contactors (operating current up to 350 A) are designed as plug-in coils.

##### Surge suppression



The solenoid coils of the 3TK1 contactors can be connected at a later stage with RC circuits (see "Accessories", page 4/25).

#### Technical specifications

Type			3TK1
Rated data of the auxiliary contacts			
General data			
Standards		IEC 60947-5-1	
Rated insulation voltage $U_i$ (Pollution degree 3)	V	690	
Conventional thermal current $I_{th}$ = Rated operational current $I_e$ /AC-12	A	10	
Load rating with AC			
Rated operational current $I_e$ /AC-15/AC-14			
• for rated operational voltage $U_e$	24 V	A	6
	110 V	A	6
	125 V	A	6
	220 V	A	6
	230 V	A	6
	380 V	A	4
	400 V	A	4
	500 V	A	1
	660 V	A	1
	690 V	A	1
Load rating with DC			
Rated operational current $I_e$ /DC-12		--	
Rated operational current $I_e$ /DC-13			
• for rated operational voltage $U_e$	24 V	A	6
	60 V	A	6
	110 V	A	1.8
	125 V	A	--
	220 V	A	0.6
	440 V	A	--
	600 V	A	--
Ⓢ and Ⓜ rated data of the auxiliary contacts			
Rated voltage		V AC, max.	600
Switching capacity		A 600, P 600	

# Contactors for Special Applications

## 3TK1 contactors for resistive loads (AC-1), 4-pole, 4 NO, 200 ... 1000 A

Type									
Dimensions (W x H x D)		mm	<b>3TK10</b> 165x156 x155	<b>3TK11</b> 165 x172x155	<b>3TK12</b> 201x198x 72	<b>3TK13</b>	<b>3TK14</b> 244x273x226	<b>3TK15</b>	<b>3TK17</b>
<b>General technical specifications</b>									
<b>Permissible mounting position</b>									
Upright mounting position also permissible									
<b>Mechanical endurance</b>	Operating cycles	Mill.	10				5		
<b>Electrical endurance</b> for $I_e$ /AC-1 at 55 °C	Operating cycles	Mill.	0.8	0.8	0.8	0.4	0.65	0.5	0.4
<b>Rated insulation voltage <math>U_i</math></b> (pollution degree 3)			V	1000					
<b>Ambient temperature</b>			°C	-25 ... +55					
• During operation			°C	-50 ... +70					
• During storage									
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C				IP00					
<b>Touch protection</b> acc. to EN 50274				Finger-safe with terminal covers					
<b>Shock resistance</b> , sine pulse			g/ms	10/15					
<b>Short-circuit protection</b>									
<b>Main circuit</b>									
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1									
• Type of coordination "1"			A	250		355	630	1000	
• Type of coordination "2"			A	250		315	630	850	
<b>Auxiliary circuit</b>									
Short circuit test with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current $I_k = 1$ kA acc. to IEC 60947-5-1			A	10					
<b>Control circuit</b>									
<b>Coil operating range</b>				0.85 ... 1.1 x $U_s$					
<b>Power consumption of the solenoid coils</b> (for cold coil and 1.0 x $U_s$ )									
• 50 Hz									
- Closing			VA	820		1 100	3 500		
- p.f.				0.4		0.35	0.26		
- Closed			VA	44		52	125		
- p.f.				0.34		0.35	0.4		
• 60 Hz									
- Closing			VA	990		1 200	4 000		
- p.f.				0.35		0.31	0.22		
- Closed			VA	52		65	140		
- p.f.				0.35		0.34	0.43		
<b>Operating times for 1.0 x <math>U_s</math></b>									
• Closing delay			ms	20 ... 40			30 ... 60		
• Opening delay			ms	7 ... 15			10 ... 20		
• Arcing time			ms	10			10		
<b>Main circuit</b>									
<b>Load rating with AC</b>									
<b>Utilization category AC-1, switching resistive loads</b>									
• Rated operational currents $I_e$									
at 40 °C up to 690 V			A	200	250	300	350	550	1 000
at 50 °C up to 690 V			A	180	230	270	310	470	850
• Rated power for AC loads with p.f. = 0.95 (at 40 °C)									
at 230 V			kW	76	95	114	132	208	378
400 V			kW	132	165	197	230	362	658
500 V			kW	165	206	247	288	452	828
690 V			kW	227	284	341	397	624	1 135
• Minimum conductor cross-section for load with $I_e$									
at 40 °C			mm <sup>2</sup>	95	150	185	240	185	300
<b>Utilization categories AC-2 and AC-3</b>									
• Rated operational currents $I_e$									
up to 400 V			A	120	145	210	210	550	700
up to 690 V			A	120	120	210	210	550	--
• Rated power of squirrel-cage or slipping motors at 50 Hz and 60 Hz									
at 230 V			kW	30	45	75	75	110	220
400 V			kW	55	75	110	110	200	370
• Short-time current at 40 °C in cold state up to 10 s			A	900	1 200	1 600	1 600	5 300	6 400
<b>Switching frequency<sup>1)</sup></b>									
<b>Switching frequency z</b> in operating cycles/hour									
• Contactors without overload relays									
No-load switching			1/h	3 600					
frequency									
AC-1			1/h	300					
AC-3			1/h	300					

<sup>1)</sup> Dependence of the switching frequency  $z'$  on the operational current  $I'$  and operational voltage  $U$ :  $z' = z \cdot (I_e/I') \cdot (400 V/U)^{1.5} \cdot 1/h$ .

## Contactors for Special Applications

### 3TK1 contactors for resistive loads (AC-1), 4-pole, 4 NO, 200 ... 1000 A





Type		3TK10	3TK11	3TK12	3TK13	3TK14	3TK15	3TK17
<b>Conductor cross-sections</b>								
<b>Main conductors:</b>		<div> <div>⊕</div> <div>Screw terminals</div> </div>						
• Stranded with cable lug	mm <sup>2</sup>	2 x 70	2 x 120	2 x 120		2 x 300		
• AWG cables, solid or stranded	AWG/MCM	2 x 00	2 x 250	2 x 250		2 x 600		
• Connecting bar (max. width)	mm	30	30	33		55		
• Terminal screw	M	M6	M10	M10		M10		
- Tightening torque	Nm	5	16	16		16		
	lb.in	42	135	135		135		
<b>Auxiliary conductors:</b>								
• Solid	mm <sup>2</sup>	2 x (0.5 ... 2.5)						
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 2.5)						
• AWG cables, solid or stranded	AWG	20 ... 14						
- Tightening torque	Nm	1.2 (10 lb.in)						

### Selection and ordering data

#### AC operation, 4 NO contacts



3TK13

Rated data AC-1						Auxiliary contacts		Rated control supply voltage $U_s$	DT	Screw terminals			PU (UNIT, SET, M)	PS*	PG	
Operational current $I_e$ up to 690 V (at 40 °C)		Rating of AC loads (p.f. = 0.95) at				Version				Article No.	Price per PU					
A		230 V kW	400 V kW	690 V kW	1000 V kW	 NO	 NC	V AC								
For screw fixing																
																
200			75	130	225	205	2	2	220 ... 230, 50 Hz 230 ... 240, 50 Hz 110/120, 50/60 Hz 24, 50 Hz	B D D D	3TK1042-0AP0 3TK1042-0AU0 3TK1042-0AF0 3TK1042-0AB0		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B	
250		90	165	280	200	2	2	220 ... 230, 50 Hz 230 ... 240, 50 Hz 110/120, 50/60 Hz 24, 50 Hz	B D D D	3TK1142-0AP0 3TK1142-0AU0 3TK1142-0AF0 3TK1142-0AB0		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B		
300		110	195	340	325	2	2	220 ... 230, 50 Hz 230 ... 240, 50 Hz 110/120, 50/60 Hz 24, 50 Hz	B D D D	3TK1242-0AP0 3TK1242-0AU0 3TK1242-0AF0 3TK1242-0AB0		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B		
350		130	230	395	370	2	2	220 ... 230, 50 Hz 230 ... 240, 50 Hz 110/120, 50/60 Hz 24, 50 Hz	B D D D	3TK1342-0AP0 3TK1342-0AU0 3TK1342-0AF0 3TK1342-0AB0		1 1 1 1	1 unit 1 unit 1 unit 1 unit	41B 41B 41B 41B		
550		205	360	620	510	2	2	220 ... 230, 50 Hz <sup>1)</sup> 230 ... 240, 50 Hz 110/120, 50/60 Hz	B D D	3TK1442-0AP0 3TK1442-0AU0 3TK1442-0AF0		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B		
800		300	525	905	575	2	2	220 ... 230, 50 Hz <sup>1)</sup> 230 ... 240, 50 Hz 110/120, 50/60 Hz	B D D	3TK1542-0AP0 3TK1542-0AU0 3TK1542-0AF0		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B		
1000		375	655	1135	--	2	2	220 ... 230, 50 Hz <sup>1)</sup> 230 ... 240, 50 Hz 110/120, 50/60 Hz	B D D	3TK1742-0AP0 3TK1742-0AU0 3TK1742-0AF0		1 1 1	1 unit 1 unit 1 unit	41B 41B 41B		

<sup>1)</sup> At 60 Hz: 240 V.





# Contactors for Special Applications

## 3TK1 contactors for resistive loads (AC-1), 4-pole, 4 NO, 200 ... 1000 A

### Accessories

For contactors	Version	Rated control supply voltage $U_s$	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Type	V AC							
Surge suppressors								
3TK10 ... 3TK13	RC elements	24 ... 48	D	3TK1930-0A		1	1 unit	41B
		110 ... 415	B	3TK1930-0B		1	1 unit	41B
3TK14 ... 3TK17		48 ... 110	C	3TK1934-0C		1	1 unit	41B
		220 ... 600	B	3TK1934-0D		1	1 unit	41B
Terminal covers								
3TK10, 3TK11	For mounting onto contactors	--	B	3TK1940-0A		1	2 units	41B
3TK12, 3TK13			B	3TK1942-0A		1	2 units	41B
3TK14, 3TK15			B	3TK1944-0A		1	2 units	41B
3TK17			B	3TK1946-0A		1	2 units	41B
Mechanical interlocking of two identical contactors								
3TK10, 3TK11	Locking devices, auxiliary contacts 2 NC	--	B	3TK1920-0A		1	1 unit	41B
3TK12, 3TK13			B	3TK1922-0A		1	1 unit	41B
3TK14 ... 3TK17	Mechanical interlock including mounting plate		B	3TK1924-0A		1	1 unit	41B

### Spare parts

For contactors	Version	Auxiliary contacts Connections		DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Type									
Auxiliary switch blocks									
3TK1	for lateral mounting	Left	Right						
	1st block 1 NO + 1 NC			B	3TK1910-3A		1	1 unit	41B
	2nd block 1 NO + 1 NC			B	3TK1910-3B		1	1 unit	41B

<b>Contacts with fixing parts</b>								
3TK10	4 moving and 8 fixed contacts	--	D	<b>3TK1960-0A</b>		1	1 unit	41B
3TK11			D	<b>3TK1961-0A</b>		1	1 unit	41B
3TK12			D	<b>3TK1962-0A</b>		1	1 unit	41B
3TK13			D	<b>3TK1963-0A</b>		1	1 unit	41B
3TK14			D	<b>3TK1964-0A</b>		1	1 unit	41B
3TK15			D	<b>3TK1965-0A</b>		1	1 unit	41B
3TK17			D	<b>3TK1967-0A</b>		1	1 unit	41B

<b>Arc chutes</b>								
3TK10	1 arc chute, 4-pole	--	D	<b>3TK1950-0A</b>		1	1 unit	41B
3TK11			D	<b>3TK1951-0A</b>		1	1 unit	41B
3TK12			D	<b>3TK1952-0A</b>		1	1 unit	41B
3TK13			D	<b>3TK1953-0A</b>		1	1 unit	41B
3TK14			D	<b>3TK1954-0A</b>		1	1 unit	41B
3TK15			D	<b>3TK1955-0A</b>		1	1 unit	41B
3TK17			D	<b>3TK1957-0A</b>		1	1 unit	41B

<b>Solenoid coils</b>								
3TK10, 3TK11	AC operation <sup>1)</sup>	--		<b>3TK1970-0A..</b>	On req.			
3TK12, 3TK13				<b>3TK1972-0A..</b>	On req.			
3TK14 ... 3TK17				<b>3TK1974-0A..</b>	On req.			

<sup>1)</sup> Rated control supply voltages: The 10th and 11th digits of the Article No. must be supplemented according to the table.

for contactor type	<b>3TK10/11/12/13</b>	<b>3TK14/15/17</b>
Solenoid coil type	<b>3TK1970-0A.., 3TK1972-0A..</b>	<b>3TK1974-0A..</b>
Rated control supply voltage $U_s$		

### AC operation

50 Hz	60 Hz		
24 V	--	B0	--
110 V	120 V	F0	F0
220 ... 230 V	240 V	P0	P0
230 ... 240 V	--	U0	U0

## Contactors for Special Applications

### 3TK20 contactors, 4-pole, 4 kW

#### Overview

##### Standards

IEC 60947-1, EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1

The contactors are suitable for use in any climate. The contactors with screw terminals are finger-safe according to EN 50274.

##### Connection methods

The contactors are available in versions with screw terminals, 6.3 mm plug-in terminals and solder pin connections for soldering in printed circuit boards.

The TK2 contactors with 6.3 mm x 0.8 mm flat connectors are coded and can be used in the plug-in base with solder pin connections for printed circuit boards (see "Accessories for 3TF2 contactors", Chapter 3).

#### Application

##### Contactors with plug-in terminals

The main area of application for the 3TK2 contactors with flat connectors is in household equipment. These contactors are also suitable for simple electric controllers.

No auxiliary switch blocks can be retrofitted.

#### Technical specifications

Type

3TK20

##### Contact endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching inductive AC loads (AC-3) depending on the breaking current and rated operational voltage. It is assumed that the operating mechanisms are switched randomly, i.e. not synchronized with the phase angle of the supply system.

The rated operational current  $I_e$  complies with utilization category AC-4 (breaking six times the rated operational current) and is intended for a contact endurance of approx. 200 000 operating cycles.

If a shorter contact endurance is sufficient, the rated operational current  $I_e$ /AC-4 can be increased.

If the contacts are used for mixed operation, i.e. normal switching (breaking the rated operational current according to utilization category AC-3) in combination with intermittent inching (breaking several times the rated operational current according to utilization category AC-4), the contact endurance can be calculated approximately from the following equation:

$$X = \frac{A}{1 + \frac{C}{100} \left( \frac{A}{B} - 1 \right)}$$

Characters in the equation:

- X Contact endurance for mixed operation in operating cycles
- A Contact endurance for normal operation ( $I_a = I_e$ ) in operating cycles
- B Contact endurance for inching ( $I_a = \text{multiple of } I_e$ ) in operating cycles
- C Inching operations as a percentage of total switching operations

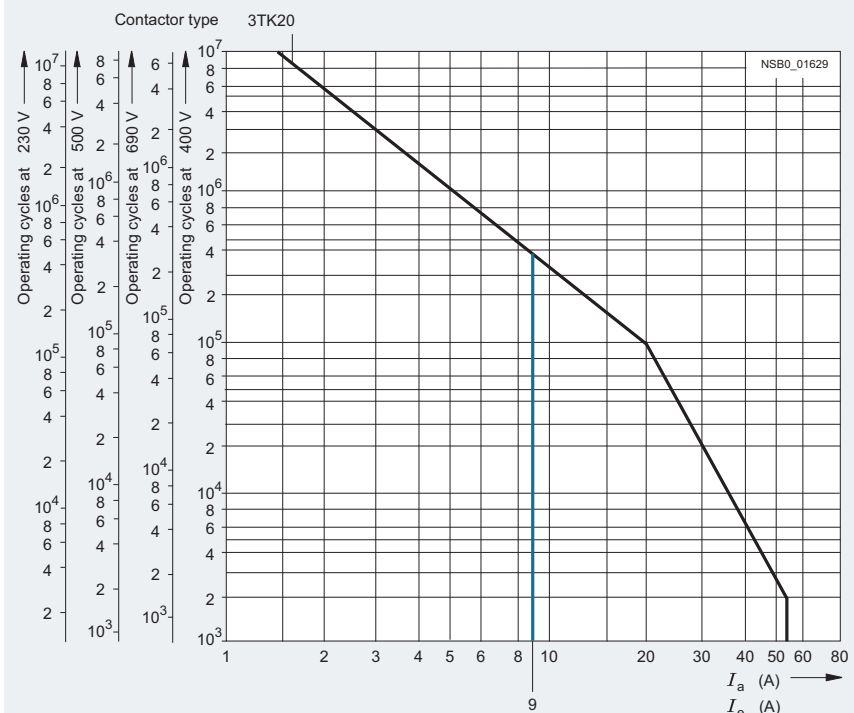



Diagram legend:

$P_N$  = Rated power for squirrel-cage motors at 400 V  
 $I_a$  = Breaking current  
 $I_e$  = Rated operational current

Type			<b>3TK20</b>
Size			<b>00</b>
Dimensions (W x H x D)		mm	45 x 48 x 63
<b>General technical specifications</b>			
<b>Permissible mounting position</b>	AC and DC operation		any
<b>Mechanical endurance</b>			
• AC operation	Operating cycles		10 million
• DC operation			30 million
• Auxiliary switch block			10 million
<b>Rated insulation voltage <math>U_i</math></b> (Pollution degree 3)			
• Screw terminals	V		690
• Flat connectors 6.3 mm x 0.8 mm	V		500
• Solder pin connections	V		500
<b>Rated impulse withstand voltage <math>U_{imp}</math></b> (Pollution degree 3)			
• Screw terminals	kV		6
• Flat connectors 6.3 mm x 0.8 mm	kV		6
• Solder pin connections	kV		6
<b>Protective separation</b> between coil and main contacts According to IEC 60947-1, Appendix N	V		up to 300
<b>Permissible ambient temperature <sup>1)</sup></b>			
• During operation	°C		-25 ... +55
• During storage	°C		-55 ... +80
<b>Degree of protection</b> acc. to IEC 60947-1 Appendix C			IP00/open
• Connection range for screw terminals			IP20
<b>Touch protection</b> acc. to EN 50274			Finger-safe for screw terminals
<b>Shock resistance</b>			
• Rectangular pulse			
- AC operation	g/ms		8.3/5 and 5.2/10
- DC operation	g/ms		11.3/5 and 9.2/10
• Sine pulse			
- AC operation	g/ms		13/5 and 8/10
- DC operation	g/ms		17.4/5 and 12.9/10
<b>Conductor cross-sections</b>			<sup>2)</sup>
<b>Short-circuit protection</b>			
<b>Main circuit <sup>3)</sup></b>			
• Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1			
- Type of coordination "1"	A		25
- Type of coordination "2" <sup>4)</sup>	A		10
- Weld-free	A		10
• Miniature circuit breaker with C characteristic	A		10
<b>Auxiliary circuit</b>			
Short-circuit test			
• with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current $I_k = 1$ kA acc. to IEC 60947-5-1	A		6

<sup>1)</sup> Applies to 50/60 Hz coil:  
At 50 Hz,  $1.1 \times U_N$ , side-by-side mounting and 100 % ON period the max. ambient temperature is +40 °C.

<sup>2)</sup> See page 4/31

<sup>3)</sup> According to excerpt from IEC 60947-4-1  
Type of coordination "1":  
Destruction of the contactor and the overload relay is permissible.  
The contactor and/or overload relay can be replaced if necessary.  
Type of coordination "2":  
The overload relay must not suffer any damage. Contact welding on the contactor is permissible, however, if the contacts can be easily separated.

<sup>4)</sup> A short-circuit current of  $I_q \leq 6$  kA applies to type of coordination "2".

## Contactors for Special Applications

### 3TK20 contactors, 4-pole, 4 kW

Type	3TK20	
Size	00	
Control circuit		
Solenoid coil operating range <sup>1)</sup>	0.8 ... 1.1 x U <sub>s</sub>	
Power consumption of the solenoid coils (for cold coil and 1.0 x U <sub>s</sub> )		
Standard version:		
• AC operation, 50 Hz		
- Closing	VA	15
- p.f.		0.41
- Closed	VA	6.8
- p.f.		0.42
• AC operation, 60 Hz		
- Closing	VA	14.4
- p.f.		0.36
- Closed	VA	6.1
- p.f.		0.46
• AC operation, 50/60 Hz <sup>1)</sup>		
- Closing	VA	16.5/13.2
- p.f.		0.43/0.38
- Closed	VA	8.0/5.4
- p.f.		0.48/0.42
For USA and Canada:		
• AC operation, 50 Hz		
- Closing	VA	14.6
- p.f.		0.38
- Closed	VA	6.5
- p.f.		0.40
• AC operation, 60 Hz		
- Closing	VA	14.4
- p.f.		0.30
- Closed	VA	6.0
- p.f.		0.44
• DC operation (closing = closed)	W	3
Permissible residual current of the electronic circuit <sup>2)</sup> (with 0 signal)		
• AC operation	mA	≤ 3 x (230 V/U <sub>s</sub> )
• DC operation	mA	≤ 1 x (230 V/U <sub>s</sub> )
Operating times for 0.8 ... 1.1 x U <sub>s</sub> <sup>3)</sup>		
Total break time = Opening delay + Arcing time		
Values apply with coil in cold state and at operating temperature for operating range		
• AC operation		
- Closing delay	ms	5 ... 19
- Opening delay	ms	2 ... 22
- Dead interval		To use the 3TK20 AC-operated contactor in reversing duty an additional dead interval of 50 ms is required along with an NC contact interlock
• DC operation		
- Closing delay	ms	16 ... 65
- Opening delay	ms	2 ... 5
• Arcing time	ms	10 ... 15
Operating times for 1.0 x U <sub>s</sub> <sup>3)</sup>		
• AC operation		
- Closing delay	ms	5 ... 18
- Opening delay	ms	3 ... 21
- Dead interval		To use the 3TK20 AC-operated contactor in reversing duty an additional dead interval of 50 ms is required along with an NC contact interlock
• DC operation		
- Closing delay	ms	19 ... 31
- Opening delay	ms	3 ... 4
• Arcing time	ms	10 ... 15

<sup>1)</sup> Applies to 50/60 Hz coil:  
At 50 Hz, 1.1 x  $U_s$ , side-by-side mounting and 100 % ON period the max. ambient temperature is +40 °C.

<sup>2)</sup> The 3TX4490-1J additional load module is recommended for higher residual currents (see "Accessories for 3TF2 contactors", Chapter 3).

<sup>3)</sup> The OFF-delay of the NO contact and the ON-delay of the NC contact are increased if the contactor coils are attenuated against voltage peaks (noise suppression diode 6 to 10 times; diode assembly 2 to 6 times, varistor +2 to 5 ms).

Type				3TK20...-0...	3TK20...-3..., 3TK20...-6..., 3TK20...-7...
Size				00	00
Main circuit					
Load rating with AC					
Utilization category AC-1, switching resistive loads					
• Rated operational current $I_e$ (at 40 °C)	up to 400/380 V	A	18	18	
	690/660 V	A	18	--	
• Rated operational current $I_e$ (at 55 °C)	400/380 V	A	16	16	
	690/660 V	A	16	--	
• Rated power for AC loads with p.f. = 1	at 230/220 V	kW	6.0	6.0	
	400/380 V	kW	10	10	
	500 V	kW	13	13	
	690/660 V	kW	17	--	
• Minimum conductor cross-section for loads with $I_e$		mm <sup>2</sup>	2.5	2.5	
Utilization categories AC-2 and AC-3					
• Rated operational current $I_e$	up to 220 V	A	9.0	9.0	
	230 V	A	9.0	9.0	
	380 V	A	9.0	9.0	
	400 V	A	8.4	8.4	
	500 V	A	6.5	6.5	
	660 V	A	5.2	--	
	690 V	A	5.2	--	
	• Rated power for motors with slipring or squirrel cage at 50 and 60 Hz	at 110 V	kW	1.2	1.2
115 V		kW	1.2	1.2	
120 V		kW	1.3	1.3	
127 V		kW	1.4	1.4	
200 V		kW	2.2	2.2	
220 V		kW	2.4	2.4	
230 V		kW	2.5	2.5	
240 V		kW	2.6	2.6	
380 V		kW	4.0	4.0	
400 V		kW	4.0	4.0	
415 V		kW	4.0	4.0	
440 V		kW	4.0	4.0	
460 V		kW	4.0	4.0	
500 V		kW	4.0	4.0	
575 V		kW	4.0	--	
660 V		kW	4.0	--	
690 V		kW	4.0	--	
• Power loss per conducting path	at $I_e$ /AC-3	W	0.3	0.3	
Utilization category AC-4					
(Contact endurance approx. 200 000 operating cycles at $I_a = 6 \times I_e$ )					
• Rated operational current $I_e$	up to 400 V	A	2.6	2.6	
	690 V	A	1.8	--	
• Rated power for motors with squirrel cage at 50 and 60 Hz	at 110 V	kW	0.32	0.32	
	115 V	kW	0.33	0.33	
	120 V	kW	0.35	0.35	
• Max. permissible rated operational current $I_e$ /AC-4 $\cong I_e$ /AC-3 up to 500 V, for reduced contact endurance and reduced switching frequency	127 V	kW	0.37	0.37	
	200 V	kW	0.58	0.58	
	220 V	kW	0.64	0.64	
	230 V	kW	0.67	0.67	
	240 V	kW	0.70	0.70	
	380 V	kW	1.10	1.10	
	400 V	kW	1.15	1.15	
	415 V	kW	1.20	1.20	
	440 V	kW	1.27	1.27	
	460 V	kW	1.33	1.33	
	500 V	kW	1.45	1.45	
	575 V	kW	1.30	--	
	660 V	kW	1.10	--	
	690 V	kW	1.15	--	


## Contactors for Special Applications

### 3TK20 contactors, 4-pole, 4 kW

Type	3TK20...-0...				3TK20...-3..., 3TK20...-6..., 3TK20...-7...	
Size	00				00	
Main circuit						
Load rating with DC						
Utilization category DC-1						
Switching resistive loads ( $L/R \leq 1$ ms)						
(Contact endurance $0.1 \times 10^6$ operating cycles)						
• Rated operational currents $I_e$ (at 55 °C)						
- 1 conducting path	up to 24 V	A	16		16	
	60 V	A	6		6	
	110 V	A	2		2	
	220/240 V	A	1		1	
- 2 conducting paths in series	up to 24 V	A	16		16	
	60 V	A	16		16	
	110 V	A	6		6	
	220/240 V	A	2		2	
- 2 conducting paths in series	up to 24 V	A	16		16	
	60 V	A	16		16	
	110 V	A	16		16	
	220/240 V	A	6		6	
Utilization category DC-3/DC-5						
Shunt-wound and series-wound motors ( $L/R \leq 15$ ms)						
• Rated operational currents $I_e$ (at 55 °C)						
- 1 conducting path	up to 24 V	A	6		6	
	60 V	A	3		3	
	110 V	A	0.5		0.5	
	220/240 V	A	0.1		0.1	
- 2 conducting paths in series	up to 24 V	A	10		10	
	60 V	A	5		5	
	110 V	A	2		2	
	220/240 V	A	0.5		0.5	
- 2 conducting paths in series	up to 24 V	A	16		16	
	60 V	A	16		16	
	110 V	A	16		16	
	220/240 V	A	2		2	
Switching frequency						
Switching frequency $z$ in operating cycles/hour						
• Contactors without overload relays	No-load switching frequency	$h^{-1}$	10 000			
	AC-1	$h^{-1}$	1 000			
	AC-2	$h^{-1}$	500			
	AC-3	$h^{-1}$	1 000			
• Contactors with overload relays (mean value)		$h^{-1}$	15			
Dependence of the switching frequency $z'$ on the operational current $I'$ and operational voltage $U'$ :						
$z' = z \cdot (I_e/I') \cdot (400\text{ V}/U')^{1.5} \cdot 1/h$						

# Contactors for Special Applications

## 3TK20 contactors, 4-pole, 4 kW

Type	3TK20		
Size	00		
Conductor cross-sections			
Main and auxiliary conductors		 Screw terminals	
• Solid	mm <sup>2</sup>	2 x (0.5 ... 2.5), 1 x 4 2 x (20 ... 14) AWG, 1 x 12 AWG	
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5), 1 x 2.5	
• Pin-end connector (DIN 46231)	mm <sup>2</sup>	1 x 1 ... 2.5	
• Terminal screw		M3	
• Prescribed tightening torque for terminal screws	Nm lb.in	0.8 ... 1.3 7 ... 11	
		 Flat connectors	
• When using a plug-in sleeve 6.3 – 1	mm <sup>2</sup>	0.5 ... 1	
• Finely stranded with 6.3 – 2.5	mm <sup>2</sup>	1 ... 2.5	
		 Solder pin connections (only for printed circuit boards)	
• Solder pin cross-section	(does not apply to plug-in bases)	mm <sup>2</sup>	0.8 x 1.2

Type	3TK20		
Size	00		
Auxiliary contacts			
General data			
Standards		IEC 60947-5-1	
Rated insulation voltage $U_i$ (Pollution degree 3)	V	690	
Conventional thermal current $I_{th}$ = Rated operational current $I_e/AC-12$	A	10	
Load rating with AC			
Rated operational current $I_e/AC-15/AC-14$			
• for rated operational voltage $U_e$	24 ... 230 V	A	4
	380 ... 400 V	A	3
	500 V	A	2
	660 V	A	1
	690 V	A	1
Load rating with DC			
Rated operational current $I_e/DC-12$			
• for rated operational voltage $U_e$	24 V	A	4
	48 V	A	2.2
	110 V	A	1.1
	125 V	A	1.1
	220 V	A	0.5
	440 V	A	--
	600 V	A	--
Rated operational current $I_e/DC-13$			
• for rated operational voltage $U_e$	24 V	A	2.1
	48 V	A	1.1
	110 V	A	0.52
	125 V	A	0.52
	220 V	A	0.27
	440 V	A	--
	600 V	A	--

## Contactors for Special Applications

### 3TK20 contactors, 4-pole, 4 kW

Type		3TK20...0...	3TK20...3..., 3TK20...6..., 3TK20...7...
Size		00	00
<b>Ⓢ and Ⓢ rated data of the 3TK20 contactors</b>			
<b>Rated insulation voltage <math>U_i</math></b>	V AC	600	300
<b>Uninterrupted current</b> , open and enclosed	A	16	16 (10 for solder pin connection)
<b>Maximum horsepower ratings</b> (Ⓢ and Ⓢ approved values)			
• Rated power for three-phase motors at 60 Hz			
- Single-phase	at 115 V hp 200 V hp 230 V hp 460/575 V hp	0.5 1 1.5 --	-- 1 1 --
- 3-phase	at 115 V hp 200 V hp 230 V hp 460/575 V hp	-- 3 3 5	-- 3 (1 for 3TK20...-6) 3 (1 for 3TK20...-6) --
<b>Overload relays</b>	Type	3UA7	
• Setting range	A	8 ... 10	
<b>Ⓢ, Ⓢ and Ⓢ rated data of the auxiliary contacts</b>			
<b>Rated voltage, max.</b>	V AC	600	
Auxiliary switch blocks, max.	V AC	300	
<b>Switching capacity</b>		A 600, Q 300	
Uninterrupted current at 240 V AC	A	10	

### Selection and ordering data

Size 00

AC-1: Operational current  $I_e = 16$  A (at 55 °C)

Rated data Utilization categories AC-2 and AC-3					Main contacts		DT	Screw terminals		PU (UNIT, SET, M)	PS*	PG
Operational current $I_e$ at 400/ 380 V A	Ratings <sup>1)</sup> of three-phase motors at 50 Hz and				Version			Article No.	Price per PU			
	230/ 220 V kW	400/ 380 V kW	500 V kW	690/ 660 V kW	NO	NC						
A												
Terminal designations												
4 NO				3 NO + 1 NC				2 NO + 2 NC				

### Contactors with screw terminals · for screw fixing and snap-on mounting onto TH 35 standard mounting rail



#### AC operation

9	2.4	4	4	4	4	--	C	3TK2040-0AP0	1	1 unit	41B
					3	1	C	3TK2031-0AP0	1	1 unit	41B
					2	2	D	3TK2022-0AP0	1	1 unit	41B

#### DC operation

9	2.4	4	4	4	4	--	C	3TK2040-0BB4	1	1 unit	41B
					3	1	C	3TK2031-0BB4	1	1 unit	41B
					2	2	C	3TK2022-0BB4	1	1 unit	41B

3TK20...0...

<sup>1)</sup> Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

Accessories, see "3TF2 contactors", Chapter 3.




# Contactors for Special Applications

## 3TK20 contactors, 4-pole, 4 kW


Rated data Utilization categories AC-2 and AC-3					Main contacts	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Operational current $I_e$					Version						
at 400/ 380 V											
A	kW	kW	kW	kW	NO	NC					

Terminal designations


4 NO



3 NO + 1 NC



2 NO + 2 NC



### Contactors with 6.3 mm x 0.8 mm flat connectors for screw fixing and snap-on mounting onto TH 35 standard mounting rail



#### AC operation

9	2.4	4	4	--	4	--	C
					3	1	C
					2	2	D

#### Flat connectors

3TK2040-3AP0	1	1 unit	41B
3TK2031-3AP0	1	1 unit	41B
3TK2022-3AP0	1	1 unit	41B

#### DC operation

9	2.4	4	4	--	4	--	D
					3	1	D
					2	2	D

3TK2040-3BB4	1	1 unit	41B
3TK2031-3BB4	1	1 unit	41B
3TK2022-3BB4	1	1 unit	41B

3TK20...-3...

### Contactors with 6.3 mm x 0.8 mm flat connectors for screw fixing (diagonal)



#### AC operation

9	2.4	4	4	--	4	--	C
					3	1	C
					2	2	C

3TK2040-7AP0	1	1 unit	41B
3TK2031-7AP0	1	1 unit	41B
3TK2022-7AP0	1	1 unit	41B

#### DC operation

9	2.4	4	4	--	4	--	C
					3	1	D
					2	2	C

3TK2040-7BB4	1	1 unit	41B
3TK2031-7BB4	1	1 unit	41B
3TK2022-7BB4	1	1 unit	41B

3TK20...-7...

### Contactors with solder pin connections for printed circuit boards<sup>2)</sup> for screw fixing (diagonal)



#### AC operation

9	2.4	4	4	--	4	--	C
					3	1	D
					2	2	C

#### Solder pin connections

3TK2040-6AP0	1	1 unit	41B
3TK2031-6AP0	1	1 unit	41B
3TK2022-6AP0	1	1 unit	41B

#### DC operation

9	2.4	4	4	--	4	--	D
					3	1	C
					2	2	C

3TK2040-6BB4	1	1 unit	41B
3TK2031-6BB4	1	1 unit	41B
3TK2022-6BB4	1	1 unit	41B

3TK20...-6...

<sup>1)</sup> Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

<sup>2)</sup> Operating range at AC-1 and 220 V:  
0.85 to 1.15 x  $U_N$ ; lower operating range limit according to IEC 60947.

Accessories, see "3TF2 contactors", Chapter 3.

### Rated control supply voltages (change of the 10th and 11th digits of the Article No.)

Rated control supply voltage $U_s$	Contactor type	Size
	3TK20	00

#### AC operation

##### Solenoid coils for AC 50 and 60 Hz

50 Hz	60 Hz	
24 V AC	29 V AC	B0
110 V AC	132 V AC	F0
230/220 V AC	276 V AC	P0 <sup>1)</sup>

#### DC operation

24 V DC	B4
---------	----

<sup>1)</sup> Operating range at 220 V:  
0.85 to 1.15 x  $U_N$ ; lower operating range limit according to IEC 60947.

Please inquire about further voltages.

## Contactors for Special Applications

### SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC, 4 ... 22 kW

#### Overview

##### Standards

IEC 60947-1, EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1,  
IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The contactors are suitable for use in any climate. They are finger-safe according to EN 50274.

The accessories for the 3-pole 3RT20 contactors can also be used for the 4-pole versions.

With sizes S0 and S2, two auxiliary contacts 1 NO + 1 NC are included in the basic version.

##### Mountable auxiliary contacts

Size S00 to S2

Four additional auxiliary contacts, including no more than 2 NC.

#### Application

The contactors are suitable:



- For changing the polarity of hoisting gear motors
- For switching two separate loads



##### Note:

Single device for pole reversal; not suitable for reversing duty. 3RT25 contactors are not suitable for switching a load between two current sources.

For a general description of sizes S00 to S2, see Chapter 3, "Power contactors for switching motors" → "SIRIUS 3RT20 contactors, 3-pole, up to 37 kW".

#### Technical specifications

Type		3RT2516	3RT2517	3RT2518	3RT2526	3RT2535	3RT2536
Size		S00			S0	S2	
General technical specifications							
<b>Permissible mounting position</b>							
The contactors are designed for operation on a vertical mounting surface.							
Upright mounting position		 Special version required					
Mechanical endurance	Operating cycles	30 million			10 million		
<b>Electrical endurance at <math>I_e/AC-1</math></b>	Operating cycles	Approx. 0.5 million					
<b>Rated insulation voltage <math>U_i</math></b> (Pollution degree 3)	V	690					
<b>Permissible ambient temperature</b>							
• During operation	°C	-25 ... +60					-25 ... +60
• During storage	°C	-55 ... +80					-55 ... +80
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C		IP20					
<b>Touch protection</b> acc. to EN 50274		Finger-safe					
Short-circuit protection							
<b>Main circuit</b>							
Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1/EN 60947-4-1							
• Type of coordination "1"	A	35			63	125	160
• Type of coordination "2"	A	20			35	63	80
• Weld-free	A	10			16	--	--

Type		3RT2516	3RT2517	3RT2518	3RT2536	3RT2537
Size		S00			S2	
Dimensions (W x H x D) <sup>1)</sup>		45 x 57.5 x 73 / 45 x 70 x 73			74.5 x 113.5 x 130 / 74.5 x 113.5 x 130	
• with mounted auxiliary switch block		45 x 57.5 x 116 / 45 x 70 x 121			74.5 x 113.5 x 173.5 / 74.5 x 113.5 x 177.5	
Type		3RT2526				
Size		S0				
Dimensions (W x H x D) for AC operation <sup>1)2)</sup>		mm	60 x 85 x 97 / 60 x 101.5 x 97			
• with mounted auxiliary switch block		mm	60 x 85 x 141 / 60 x 101.5 x 144			
Dimensions (W x H x D) for DC operation <sup>1)2)</sup>		mm	60 x 85 x 107 / 60 x 101.5 x 107			
• with mounted auxiliary switch block		mm	60 x 85 x 151 / 60 x 101.5 x 154			

<sup>1)</sup> Dimensions for devices with screw terminals/spring-type terminals.

<sup>2)</sup> For size S0, devices for AC and DC operation differ in depth. The following applies: Depth (DC) = Depth (AC) + 10 mm.

# Contactors for Special Applications

## SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC, 4 ... 22 kW

Type		3RT2516	3RT2517	3RT2518	3RT2526	3RT2535	3RT2536
Size		S00			S0	S2	
<b>Control circuit</b>							
<b>Solenoid coil operating range</b>							
• AC operation	at 50 Hz at 60 Hz	0.8 ... 1.1 x $U_s$ 0.85 ... 1.1 x $U_s$			0.8 ... 1.1 x $U_s$ 0.8 ... 1.1 x $U_s$		
• DC operation	up to 50 °C up to 60 °C	0.8 ... 1.1 x $U_s$ 0.85 ... 1.1 x $U_s$			-- --		
• AC/DC operation		--				0.8 x $U_{smin}$ ... 1.1 x $U_{smax}$	
<b>Power consumption of the solenoid coils</b> (for cold coil and 1.0 x $U_s$ )		see 3RT2316	see 3RT2317		see 3RT2326	see 3RT233	
<b>Operating times for 0.8 to 1.1 x <math>U_s</math></b> (Total break time = Opening delay + Arcing time)		see 3RT2316	see 3RT2317		see 3RT2326	see 3RT233	
<b>Main circuit</b>							
<b>Load rating with AC</b>							
<b>Utilization category AC-1</b>							
<b>Switching resistive loads</b>							
• Rated operational currents $I_e$	at 40 °C up to 690 V A at 60 °C up to 690 V A	18 16	22 20		40 35	60 55	70 60
• Rated power for AC loads p.f. = 0.95 (at 60 °C)	at 230 V kW 400 V kW	6 10.5	7.5 13		13.3 23	21 36	23 39
• Minimum conductor cross-section for loads with $I_e$	at 40 °C mm <sup>2</sup>	2.5	2.5		10	16	25
<b>Utilization categories AC-2 and AC-3</b>							
• Rated operational currents $I_e$	NO up to 400 V A NC up to 400 V A	9 9	12 9	16 9	AC <sup>1)</sup> 25 25	DC <sup>1)</sup> 25 20	35 35
• Rated power for slipping or squirrel-cage motors at 50 and 60 Hz	NO at 230 V kW NC at 230 V kW NO at 400 V kW NC at 400 V kW	2.2 2.2 4 4	3 2.2 5.5 4	4 2.2 7.5 4	5.5 5.5 11 11	5.5 5.5 18.5 7.5	11 11 22 18.5
<b>Load rating with DC</b>							
<b>Utilization category DC-1</b>							
<b>Switching resistive loads (<math>L/R \leq 1</math> ms)</b>							
• Rated operational currents $I_e$ (at 60 °C)							
- 1 conducting path	up to 24 V A 60 V A 110 V A 220 V A 440 V A	16 16 2.1 0.8 0.6	20 20 2.1 0.8 0.6		35 20 4.5 1 0.4	55 23 4.5 1 0.4	60
- 2 conducting paths in series	up to 24 V A 60 V A 110 V A 220 V A 440 V A	16 16 12 1.6 0.8	20 20 12 1.6 0.8		35 35 35 5 1	55 45 45 5 1	
<b>Utilization category DC-3/DC-5<sup>2)</sup></b>							
<b>Shunt-wound and series-wound motors (<math>L/R \leq 15</math> ms)</b>							
• Rated operational currents $I_e$ (at 60 °C)							
- 1 conducting path	up to 24 V A 60 V A 110 V A 220 V A 440 V A	16 0.5 0.15 0.75 --	20 0.5 0.15 0.75 --		20 5 2.5 1 0.09	35 6 2.5 1 0.1	
- 2 conducting paths in series	up to 24 V A 60 V A 110 V A 220 V A 440 V A	16 5 0.35 -- --	20 5 0.35 -- --		35 35 15 3 0.27	55 45 25 5 0.27	

<sup>1)</sup> Values for devices with AC and DC operation: for 3RT25 26 with DC operation, different values apply to AC-2 and AC-3 for the NC.

<sup>2)</sup> For  $U_s > 24$  V, the rated operational currents  $I_e$  for the NC contact conducting paths are 50 % of the values for the NO contact conducting paths.

## Contactors for Special Applications

### SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC, 4 ... 22 kW

#### Selection and ordering data

##### AC operation, 2 NO + 2 NC<sup>1)</sup>

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B




3RT251.-1A.00



3RT251.-2A.00



3RT252.-1A.00




3RT252.-2A.00

Rated data		Auxiliary contacts		Rated control supply voltage $U_s$	DT	Screw terminals		DT	Spring-type terminals	
AC-2/AC-3, $T_U$ : up to 60 °C	AC-1, $T_U$ : 40/60 °C	Ident. No.	Version			Article No.	Price per PU		Article No.	Price per PU
Operational current $I_e$ at 400 V	Ratings of three-phase motors at 50 Hz and 400 V	Operational current $I_e$ up to 690 A								
	<b>400 V</b>									
A	<b>kW</b>	A	NO NC	V AC						

For screw fixing and snap-on mounting onto TH 35 standard mounting rail


##### Size S00<sup>2)</sup>



9	<b>4</b>	18 / 16	--	--	--	24, 50/60 Hz 110, 50/60 Hz 230, 50/60 Hz	B B A	<b>3RT2516-1AB00</b> <b>3RT2516-1AF00</b> <b>3RT2516-1AP00</b>	B B A	<b>3RT2516-2AB00</b> <b>3RT2516-2AF00</b> <b>3RT2516-2AP00</b>
12/9 <sup>3)</sup>	<b>5.5/4<sup>3)</sup></b>	22 / 20	--	--	--	24, 50/60 Hz 110, 50/60 Hz 230, 50/60 Hz	B B ▶ B	<b>3RT2517-1AB00</b> <b>3RT2517-1AF00</b> <b>3RT2517-1AP00</b>	B A A	<b>3RT2517-2AB00</b> <b>3RT2517-2AF00</b> <b>3RT2517-2AP00</b>
16/9 <sup>3)</sup>	<b>7.5/4<sup>3)</sup></b>	22 / 20	--	--	--	24, 50/60 Hz 110, 50/60 Hz 230, 50/60 Hz	B B A	<b>3RT2518-1AB00</b> <b>3RT2518-1AF00</b> <b>3RT2518-1AP00</b>	B B A	<b>3RT2518-2AB00</b> <b>3RT2518-2AF00</b> <b>3RT2518-2AP00</b>

##### Size S0

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



25	<b>11</b>	40 / 35	<b>11</b>	1	1	24, 50 Hz 110, 50 Hz 230, 50 Hz	B B A	<b>3RT2526-1AB00</b> <b>3RT2526-1AF00</b> <b>3RT2526-1AP00</b>	B B A	<b>3RT2526-2AB00</b> <b>3RT2526-2AF00</b> <b>3RT2526-2AP00</b>
----	-----------	---------	-----------	---	---	---------------------------------------	-------------	--	-------------	--

<sup>1)</sup> Single device for pole reversal; not suitable for reversing duty.

<sup>2)</sup> For size S00: Coil operating range at 50 Hz: 0.8 ... 1.1 x  $U_s$   
 at 60 Hz: 0.85 ... 1.1 x  $U_s$

<sup>3)</sup> Values for NO contact/NC contact. The NC contact can switch no more than 4 kW.

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, see "SIRIUS 3RT20 contactors", Chapter 3.

# Contactors for Special Applications



## SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC, 4 ... 22 kW

### AC operation, 2 NO + 2 NC<sup>1)</sup>

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B




3RT253.-1A.00

Rated data		Auxiliary contacts		Rated control supply voltage $U_s$	DT	Screw terminals		DT	Spring-type terminals for auxiliary and control circuits	
AC-2/AC-3, $T_U$ : up to 60 °C	AC-1, $T_U$ : 40/60 °C	Ident. No.	Version			Article No.	Price per PU		Article No.	Price per PU
Operational current $I_e$ at 400 V	Ratings of three-phase motors at 50 Hz and	Operational current $I_e$ up to								
A	<b>400 V</b>	690	NO	NC	V AC					
For screw fixing and snap-on mounting onto TH 35 standard mounting rail										

#### Size S2 **NEW**

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



35	<b>18.5</b>	60 / 55	<b>11</b>	1	1	24, 50 Hz 110, 50 Hz 230, 50 Hz	A A A	<b>3RT2535-1AB00</b> <b>3RT2535-1AF00</b> <b>3RT2535-1AP00</b>	-- -- --
41	<b>22</b>	70 / 60	<b>11</b>	1	1	24, 50 Hz 110, 50 Hz 230, 50 Hz	B B A	<b>3RT2536-1AB00</b> <b>3RT2536-1AF00</b> <b>3RT2536-1AP00</b>	-- -- --

<sup>1)</sup> Single device for pole reversal; not suitable for reversing duty.

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, see "SIRIUS 3RT20 contactors", Chapter 3.

## Contactors for Special Applications

### SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC, 4 ... 22 kW

#### DC operation, 2 NO + 2 NC<sup>1)</sup>

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B



3RT251.-1B.40



3RT251.-2B.40



3RT252.-1B.40




3RT252.-2B.40

Rated data		Auxiliary contacts		Rated control supply voltage $U_s$	DT	Screw terminals		DT	Spring-type terminals	
AC-2/AC-3, $T_U$ : up to 60 °C	AC-1, $T_U$ : 40/60 °C	Ident. No.	Version			Article No.	Price per PU		Article No.	Price per PU
Operational current $I_e$ at 400 V	Ratings of three-phase motors at 50 Hz and 400 V	Operational current $I_e$ up to 690								
A	kW	A	NO NC	V DC						

For screw fixing and snap-on mounting onto TH 35 standard mounting rail


#### Size S00



9	4	18 / 16	--	--	--	24 / 220	►	3RT2516-1BB40 3RT2516-1BM40	A B	3RT2516-2BB40 3RT2516-2BM40
12/9 <sup>2)</sup>	5.5/4 <sup>2)</sup>	22 / 20	--	--	--	24 / 220	A B	3RT2517-1BB40 3RT2517-1BM40	A B	3RT2517-2BB40 3RT2517-2BM40
16/9 <sup>2)</sup>	7.5/4 <sup>2)</sup>	22 / 20	--	--	--	24 / 220	A B	3RT2518-1BB40 3RT2518-1BM40	A B	3RT2518-2BB40 3RT2518-2BM40

#### Size S0

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



25 (20) <sup>3)</sup>	11 (7.5) <sup>3)</sup>	40 / 35	11	1	1	24 / 220	A B	3RT2526-1BB40 3RT2526-1BM40	A B	3RT2526-2BB40 3RT2526-2BM40
-----------------------	------------------------	---------	----	---	---	----------	--------	--------------------------------	--------	--------------------------------

<sup>1)</sup> Single device for pole reversal; not suitable for reversing duty.

<sup>2)</sup> Values for NO contact/NC contact. The NC contact can switch no more than 4 kW.

<sup>3)</sup> Values in brackets for NC. (The deviating value for the NC only applies to devices with DC operation.)

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, see "SIRIUS 3RT20 contactors", Chapter 3.

# Contactors for Special Applications



## SIRIUS 3RT25 contactors, 4-pole, 2 NO + 2 NC, 4 ... 22 kW

### AC/DC operation, 2 NO + 2 NC<sup>1)</sup>

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B



3RT253.-1N.30


Rated data		Auxiliary contacts		Rated control supply voltage $U_s$	DT	Screw terminals		DT	Spring-type terminals for auxiliary and control circuits	
AC-2/AC-3, $T_U$ : up to 60 °C	AC-1, $T_U$ : 40/60 °C	Ident. No.	Version			Article No.	Price per PU		Article No.	Price per PU
Operational current $I_e$ at 400 V	Ratings of three-phase motors at 50 Hz and <b>400 V</b>	Operational current $I_e$ up to 690	 							
A	<b>kW</b>	A	NO NC	V AC/DC						

For screw fixing and snap-on mounting onto TH 35 standard mounting rail

#### Size S2 **NEW**

#### With integrated coil circuit (varistor)

Auxiliary contacts 1 NO + 1 NC, Ident. No. 11



35	<b>18.5</b>	60 / 55	<b>11</b>	1	1	20 ... 33 83 ... 155 175 ... 280	A B B	<b>3RT2535-1NB30</b> <b>3RT2535-1NF30</b> <b>3RT2535-1NP30</b>	-- -- --
41	<b>22</b>	70 / 60	<b>11</b>	1	1	20 ... 33 83 ... 155 175 ... 280	A B B	<b>3RT2536-1NB30</b> <b>3RT2536-1NF30</b> <b>3RT2536-1NP30</b>	-- -- --

<sup>1)</sup> Single device for pole reversal; not suitable for reversing duty.

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, [see "SIRIUS 3RT20 contactors", Chapter 3.](#)

## Contactors for Special Applications

### SIRIUS 3RT26 capacitor contactors, 12.5 ... 75 kvar

#### Overview

##### Standards

IEC 60947-1, DIN EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1,  
IEC 60947-5-1, EN 60947-5-1,  
IEC 60831-1, EN 60831-1,  
IEC 61921, EN 61921.

The contactors are suitable for use in any climate. They are finger-safe according to EN 50274.

##### Function

The 3RT26 capacitor contactors are special versions of the 3RT20 contactors size S00, S0 and S2 which are configured for switching banks of capacitors.

They are designed to convey the inrush current in such applications, and are weld-resistant in compliance with the technical specifications.

The 3RT26 contactors are suitable for choked and unchoked capacitors. Besides switching power capacitors in reactive-current compensation systems, they are also used to switch converters.

In the case of 3RT26 capacitor contactors, the precharging resistors are an integral component of the contactor. The precharging resistors are activated via leading auxiliary contacts before the main contacts close. During switching, after attenuation of the peak current, they are decoupled again. Attenuation of the inrush current peaks also reduces interfering harmonics in the supply.

##### Notes:

Only switching onto discharged capacitors is permitted with capacitor contactors.

Manual operation for function tests is not permitted. The series resistors must not be removed.

##### Auxiliary switches

The variance of unassigned auxiliary switches has been increased; available versions, see ["Selection and ordering data", pages 4/45](#).

Details of deviating versions are available on request.

In sizes S00 and S0, the auxiliary switch block which is snapped onto the capacitor contactor contains the three leading NO contacts and one unassigned auxiliary contact. In addition, another one (S00) or two (S0) unassigned auxiliary contacts are provided in the basic unit.

The fitting of auxiliary switches for capacitor contactors in sizes S00 and S0 of the respective version is not expandable. For size S2, unassigned auxiliary switches are implemented by means of lateral auxiliary switch blocks. More auxiliary switch blocks can be mounted laterally corresponding to the 3RT20 contactors.

Devices with 2 NC contacts are now consistently available in all power quantities.

#### Technical specifications

Type

Size

**3RT26**


**S00 to S2**

##### Contact endurance of the main contacts

The characteristic curves show the contact endurance of the contactors when switching capacitive loads (AC-6b) depending on the reactive power  $Q_N$  and rated operational voltage.

The rated operational current  $I_e$  complies with utilization category AC-6b (breaking 1.35 times the rated operational current) and is intended for a contact endurance of at least 150 000 to 200 000 operating cycles.

If a shorter contact endurance is sufficient, the rated operational current  $I_e$ /AC-6b can be increased.

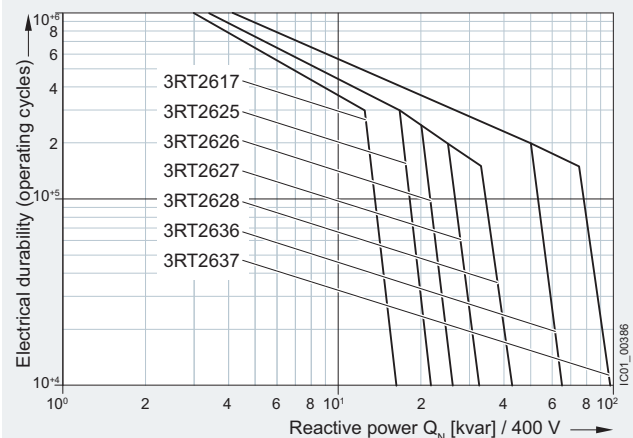





# Contactors for Special Applications

## SIRIUS 3RT26 capacitor contactors, 12.5 ... 75 kvar

All technical specifications not mentioned in the table below are identical to those of the 3RT20 contactors:

- for size S00 as for the 3RT201 contactors
- for size S0 as for the 3RT202 contactors
- for size S2 as for the 3RT203 contactors

See Chapter 3, "Power contactors for switching motors" → "SIRIUS 3RT20 contactors, 3-pole, 3 to 37 kW"

Type									
Size									
Dimensions (W x H x D) including auxiliary switches and connecting cables		3RT261. S00 45x120x118	3RT2625 S0 45x150x 50	3RT2626	3RT2627	3RT2628	3RT2636 S2 65 x115 x130	3RT2637	
<b>General technical specifications</b>									
<b>Permissible mounting position</b> The contactors are designed for operation on a vertical mounting surface.									
<b>Mechanical endurance</b> • Basic units with snap-on auxiliary switch block		Operating cycles	3 million						
<b>Electrical endurance</b> for apparent power at 400 V		kvar  Operating cycles	12.5  300 000	16.7  200 000	20  200 000	25  200 000	33  150 000	50  200 000	75  150 000
<b>Rated insulation voltage <math>U_i</math></b> (Pollution degree 3)		V	690						
<b>Rated impulse withstand voltage <math>U_{imp}</math></b>		kV	6						
<b>Protective separation</b> between the coil and the main contacts, acc. to IEC 60947-1, Appendix N		V	400						
<b>Permissible ambient temperature</b> • During operation <sup>1)</sup> • During storage		°C °C	-25 ... +60 -55 ... +80						
<b>Degree of protection</b> acc. to IEC 60947-1, Appendix C • On front			IP20						
<b>Touch protection</b> acc. to EN 50274			Finger-safe						
<b>Shock resistance</b> • Rectangular pulse		g/ms	6.7/5 and 4.2/10	7.5/5 and 4.7/10	8.3/5 and 5.3/10			6.8/5 and 4/10	
• Sine pulse		g/ms	10.5/5 and 6.6/10	11.8/5 and 7.4/10	13.5/5 and 8.3/10			10.6/5 and 6.2/10	
<b>Short-circuit protection</b>									
<b>Main circuit</b> • Fuse links, operational class gG: LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE, according to IEC 60947-4-1/EN 60947-4-1 - Type of coordination "1"		A	40	50	63	80	100	160	200
<b>Auxiliary circuit</b> • with fuse links of operational class gG: DIAZED, type 5SB; NEOZED, type 5SE with short-circuit current $I_k$ = 1 kA, acc. to IEC 60947-5-1 • with miniature circuit breakers with C characteristic with short-circuit current $I_k$ = 400 A		A  A	10  10						

<sup>1)</sup> A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C.

## Contactors for Special Applications

### SIRIUS 3RT26 capacitor contactors, 12.5 ... 75 kvar

Type		3RT2617	3RT2625	3RT2626,	3RT2627	3RT2628	3RT2636	3RT2637
Size		S00	S0				S2	
<b>Control</b>								
<b>Solenoid coil operating range</b>								
• AC operation	50 Hz	0.8 ... 1.1 x $U_s$	0.8 ... 1.1 x $U_s$				0.8 ... 1.1 x $U_s$	
	60 Hz	0.85 ... 1.1 x $U_s$	0.85 ... 1.1 x $U_s$				--	
• AC/DC operation	50 Hz	--	0.7 ... 1.3 x $U_s$				0.8 ... 1.1 x $U_s$	
	60 Hz	--	0.7 ... 1.3 x $U_s$				0.8 ... 1.1 x $U_s$	
• DC operation		0.8 ... 1.1 x $U_s$					--	
<b>Power consumption of the solenoid coils</b> (for cold coil and 1.0 x $U_s$ )								
• AC operation, 50 Hz, standard version								
- Closing	VA	--	65	77			190	
- p.f.		--	0.82	0.82			0.72	
- Closed	VA	--	7.6	9.8			16	
- p.f.		--	0.25	0.25			0.37	
• AC operation, 50/60 Hz, standard version								
- Closing	VA	37	81				190	
- p.f.		0.8	0.72				0.72	
- Closed	VA	5.7	10.5				16	
- p.f.		0.25	0.25				0.37	
• AC/DC operation, 50/60 Hz, standard version								
- Closing AC	VA	--	13.6				40	
- p.f.		--	0.98				0.71	
- Closed AC	VA	--	1.91				on req.	
- p.f.		--	0.25				1	
- Closing DC		--	13.2				25	
- Closed DC		--	1.56				on req.	
• DC operation								
- Closing	W	4	5.9				--	
- Closed	W	4	5.9				--	
<b>Maximum permissible residual current of the electronics</b> (with 0 signal)								
• AC operation (230 V/ $U_s$ ) <sup>1)</sup>	mA	3	6	7			on req.	
• DC operation (24 V/ $U_s$ ) <sup>1)</sup>	mA	10	16	16			on req.	
<b>Operating times for 0.8 ... 1.1 x <math>U</math></b> <b>or at 60 Hz AC: 0.85 ... 1.1 x <math>U_s</math></b>								
Total break time = Opening delay + Arcing time								
• AC operation								
- Closing delay	ms	8 ... 33	9 ... 38	8 ... 40			10 ... 80	
- Opening delay	ms	4 ... 15	4 ... 16				10 ... 18	
• AC/DC operation								
- Closing delay	ms	--	50 ... 70				50 ... 110	
- Opening delay	ms	--	35 ... 45				35 ... 55	
• DC operation								
- Closing delay	ms	30 ... 100	55 ... 80	50 ... 170			--	
- Opening delay	ms	7 ... 13	16 ... 17	15 ... 18			--	
• Arcing time	ms	10 ... 15						

<sup>1)</sup> Size S00: The 3RT2916-1GA00 additional load module is recommended for higher residual currents.

# Contactors for Special Applications

## SIRIUS 3RT26 capacitor contactors, 12.5 ... 75 kvar

Type		3RT2617	3RT2625	3RT2626	3RT2627	3RT2628	3RT2636	3RT2637
Size		S00	S0				S2	
<b>Auxiliary circuit</b>								
<b>Auxiliary contacts</b> (unassigned)		1 NO + 1 NC, 2 NC	1 NO + 2 NC				1 NO + 1 NC, 2 NC	
<b>Another auxiliary contact can be mounted laterally</b>		--					✓ <sup>1)</sup>	✓ <sup>1)</sup>
Technical specifications incl. CSA and UL rated data of the auxiliary contacts, see Chapter 3, "3RT20 motor contactors"								
<b>Main circuit</b>								
<b>Load rating with AC</b>								
<b>Utilization category AC-6b</b>								
<b>Switching of AC capacitors</b>								
Rated operational current $I_{\theta}$ at AC								
• at ambient temperature of 40 °C	A	18.9	25.3	30.2	37.8	50	75.8	113.4
• at ambient temperature of 60 °C	A	18	24	29	36	47.6	72.2	108
Rated operational reactive power at rated operational voltage								
230 V, 50/60 Hz	kvar	0 ... 7.2	3 ... 9.6	4 ... 11.5	5 ... 14	6 ... 19	10 ... 29	14 ... 43
<b>400 V, 50/60 Hz</b>	kvar	0 ... 12.5	6 ... 16.7	7 ... 20	8 ... 25	11 ... 33	17 ... 50	25 ... 75
500 V, 50/60 Hz	kvar	0 ... 15	7 ... 21	8 ... 25	10 ... 31	14 ... 41	21 ... 63	31 ... 94
690 V, 50/60 Hz	kvar	0 ... 21	10 ... 29	11 ... 34	14 ... 43	19 ... 57	29 ... 86	43 ... 129
<b>Minimum conductor cross-sections</b>								
for load with $1.3 \times I_{\theta}$								
at 40 °C	mm <sup>2</sup>	1 x 4	1 x 6	1 x 10	1 x 10	1 x 16	1 x 35	< 133 A: 1 x 50 > 133 A: 2 x 35; 1 x 70 <sup>4)</sup>
at 60 °C	mm <sup>2</sup>	2 x 4; 1 x 6 <sup>2)</sup>	1 x 10	1 x 10	2 x 10; 1 x 16 <sup>3)</sup>	1 x 25	1 x 50	2 x 35; 1 x 70 <sup>4)</sup>
<b>Switching frequency</b>								
<b>No-load switching frequency</b>								
AC operation	1/h	500						
DC operation	1/h	500						
<b>Max. switching frequency z</b>								
in operating cycles/hour								
• at $I_{\theta}$ /AC-6b and at								
230 V, 50/60 Hz	1/h	180		100				
400 V, 50/60 Hz	1/h	180		100				100 / 80 <sup>5)</sup>
480 V, 50/60 Hz	1/h	180		100		70	60	50
500 V, 50/60 Hz	1/h	180		100		65	55	45
600 V, 50/60 Hz	1/h	180		100		45	40	32
690 V, 50/60 Hz	1/h	180	150	100	72	36	30	25
<b>Ⓢ and Ⓜ rated data</b>								
<b>Rated insulation voltage</b>								
	V AC	600						
<b>Operational reactive power at AC-6b</b>								
<b>3-phase, at operational voltage</b>								
110 ... 120 V	kvar	3.4	4.6	5.5	6.3	8.2	14	19
200 ... 208 V	kvar	6.2	8.3	10	11	15	25	34
220 ... 230 V	kvar	6.9	9.1	11	13	16	27	38
460 ... 480 V	kvar	14	18	22	25	33	55	75
575 ... 600 V	kvar	17	23	28	31	41	69	94
<b>Short-circuit protection</b>								
at 600 V	kA	5					10	
<b>Fuse for main circuit</b>								
Class RK5	A	40	80			100	250	

<sup>1)</sup> No more than one lateral auxiliary switch block.

<sup>2)</sup> 1 x 6 mm<sup>2</sup> only with pin-end connector.

<sup>3)</sup> 1 x 16 mm<sup>2</sup> with pin-end connector or 3RV2925-5AB feeder terminal.

<sup>4)</sup> 1 x 70 mm<sup>2</sup> only with 3RV2935-5A feeder terminal.

<sup>5)</sup> Operating cycles/h: 100 with AC operation; 80 with AC/DC operation.

## Contactors for Special Applications


### SIRIUS 3RT26 capacitor contactors, 12.5 ... 75 kvar

Type		3RT2617-1....	3RT2625-1...., 3RT2626-1...., 3RT2627-1....	3RT2628-1....	3RT263.-1....
Size		S00	S0	S0	S2
Conductor cross-sections		Screw terminals			
<b>Main conductors</b> (1 or 2 conductors can be connected)					
• Solid or stranded	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> 2 x (0.75 ... 2.5) <sup>1)</sup> max. 2 x 4	2 x (1 ... 2.5) <sup>1)</sup> 2 x (2.5 ... 10) <sup>1)</sup>	1 x (2.5 ... 25)	2 x (1 ... 35) 1 x (1 ... 50)
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> 2 x (0.75 ... 2.5) <sup>1)</sup>	2 x (1 ... 2.5) <sup>1)</sup> 2 x (2.5 ... 6) <sup>1)</sup> 1 x 10	1 x (2.5 ... 16)	2 x (1 ... 25) 1 x (1 ... 35)
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) <sup>1)</sup> 2 x (18 ... 14) <sup>1)</sup> 2 x 12	2 x (16 ... 12) <sup>1)</sup> 2 x (14 ... 8) <sup>1)</sup>	1 x (10 ... 4)	2 x (18 ... 2) 1 x (18 ... 1)
• Terminal screw		M3 (for Pozidriv size 2; Ø 5 ... 6)	M4 (for Pozidriv size 2; Ø 5 ... 6)	M8	M6 (for Pozidriv size 2; Ø 5 ... 6)
• Tightening torque	Nm lb.in	0.8 ... 1.2 7 ... 10.3	2 ... 2.5 18 ... 22	3 ... 4 27 ... 36	3 ... 4.5 27 ... 40
<b>Auxiliary conductors</b>					
• Solid or stranded	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> 2 x (0.75 ... 2.5) <sup>1)</sup> max. 2 x 4			
• Finely stranded with end sleeve	mm <sup>2</sup>	2 x (0.5 ... 1.5) <sup>1)</sup> 2 x (0.75 ... 2.5) <sup>1)</sup>			
• AWG cables, solid or stranded	AWG	2 x (20 ... 16) <sup>1)</sup> 2 x (18 ... 14) <sup>1)</sup> 2 x 12			
• Terminal screw		M3 (for Pozidriv size 2; Ø 5 ... 6)			
• Tightening torque	Nm lb.in	0.8 ... 1.2 7 ... 10.3			


<sup>1)</sup> If two different conductor cross-sections are connected to one clamping point, both cross-sections must lie in one of the ranges specified.

#### Circuit diagrams


3RT2617-1A..3  
Size S00, 1 NO + 1 NC

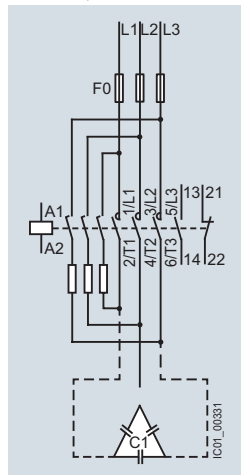


3RT2617-1A..5  
Size S00, 2 NC

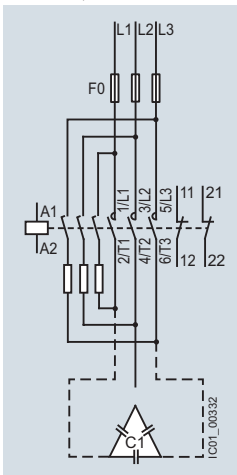


3RT262.-1A..5  
Size S0, 1 NO + 2 NC

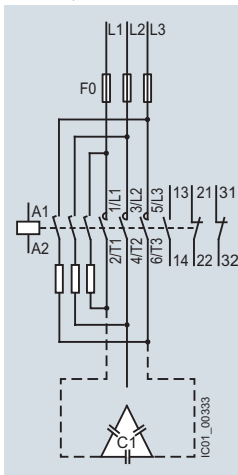

3RT263.-1A..3  
Size S2, 1 NO + 1 NC

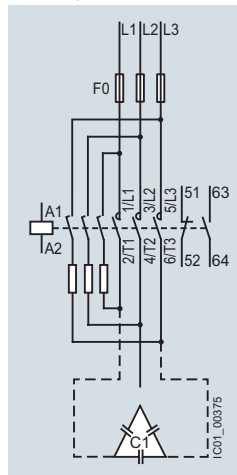

3RT263.-1A..5  
Size S2, 2 NC

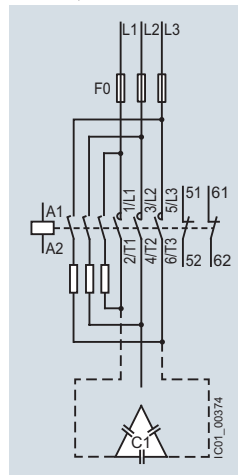

**NEW** SIRIUS 3RT26 capacitor contactors, 12.5 ... 75 kvar**Selection and ordering data****AC operation**

Main, auxiliary and control conductors: Screw terminals



3RT2617-1A.05



3RT262-1A.05

3RT2628-1A.05  
with feeder terminal

3RT263-1A.05

Utilization category AC-6b Switching of AC capacitors for an ambient temperature of 60 °C Capacitor rating at operational voltage 50/60 Hz				Auxiliary contacts, unassigned Version		Rated control supply voltage $U_s$ <sup>1)</sup>		DT	Screw terminals	PU (UNIT, SET, M)	PS*	PG
at 230 V	at 400 V	at 500 V	at 690 V	NO	NC	V AC	Hz		Article No.	Price per PU		
kvar	kvar	kvar	kvar									
<b>For screw fixing and snap-on mounting onto TH 35 standard mounting rail</b>												
<b>Size S00<sup>2)</sup></b>												
0 ... 7.2	<b>0 ... 12.5</b>	0 ... 15	0 ... 21	1	1	24 110 230	50 / 60	B	<b>3RT2617-1AB03</b>	1	1 unit	41B
								B	<b>3RT2617-1AF03</b>	1	1 unit	41B
								B	<b>3RT2617-1AP03</b>	1	1 unit	41B
0 ... 7.2	<b>0 ... 12.5</b>	0 ... 15	0 ... 21	0	2	24 110 230	50 / 60	B	<b>3RT2617-1AB05</b>	1	1 unit	41B
								B	<b>3RT2617-1AF05</b>	1	1 unit	41B
								B	<b>3RT2617-1AP05</b>	1	1 unit	41B
<b>Size S0<sup>3)</sup></b>												
3 ... 9.6	<b>6 ... 16.7</b>	7 ... 21	10 ... 29	1	2	24 110 230	50	B	<b>3RT2625-1AB05</b>	1	1 unit	41B
								B	<b>3RT2625-1AF05</b>	1	1 unit	41B
								B	<b>3RT2625-1AP05</b>	1	1 unit	41B
4 ... 11.5	<b>7 ... 20</b>	8 ... 25	11 ... 34	1	2	24 110 230	50	B	<b>3RT2626-1AB05</b>	1	1 unit	41B
								B	<b>3RT2626-1AF05</b>	1	1 unit	41B
								B	<b>3RT2626-1AP05</b>	1	1 unit	41B
5 ... 14	<b>8 ... 25</b>	10 ... 31	14 ... 43	1	2	24 110 230	50	B	<b>3RT2627-1AB05</b>	1	1 unit	41B
								B	<b>3RT2627-1AF05</b>	1	1 unit	41B
								B	<b>3RT2627-1AP05</b>	1	1 unit	41B
6 ... 19	<b>11 ... 33</b>	14 ... 41	19 ... 57	1	2	24 110 230	50	B	<b>3RT2628-1AB05</b>	1	1 unit	41B
								B	<b>3RT2628-1AF05</b>	1	1 unit	41B
								B	<b>3RT2628-1AP05</b>	1	1 unit	41B
<b>Size S2<sup>4)</sup></b>												
10 ... 29	<b>17 ... 50</b>	21 ... 63	29 ... 86	1	1	24 110 230	50	B	<b>3RT2636-1AB03</b>	1	1 unit	41B
								B	<b>3RT2636-1AF03</b>	1	1 unit	41B
								B	<b>3RT2636-1AP03</b>	1	1 unit	41B
10 ... 29	<b>17 ... 50</b>	21 ... 63	29 ... 86	0	2	24 110 230	50	B	<b>3RT2636-1AB05</b>	1	1 unit	41B
								B	<b>3RT2636-1AF05</b>	1	1 unit	41B
								B	<b>3RT2636-1AP05</b>	1	1 unit	41B
14 ... 43	<b>25 ... 75</b>	31 ... 94	43 ... 129	1	1	24 110 230	50	B	<b>3RT2637-1AB03</b>	1	1 unit	41B
								B	<b>3RT2637-1AF03</b>	1	1 unit	41B
								B	<b>3RT2637-1AP03</b>	1	1 unit	41B
14 ... 43	<b>25 ... 75</b>	31 ... 94	43 ... 129	0	2	24 110 230	50	B	<b>3RT2637-1AB05</b>	1	1 unit	41B
								B	<b>3RT2637-1AF05</b>	1	1 unit	41B
								B	<b>3RT2637-1AP05</b>	1	1 unit	41B

<sup>1)</sup> Coil operating range  
at 50 Hz: 0.8 ... 1.1 x  $U_s$   
at 60 Hz: 0.85 ... 1.1 x  $U_s$

<sup>2)</sup> For conductor cross-sections of 6 mm<sup>2</sup> pin-end connectors must be used.

<sup>3)</sup> For conductor cross-sections of 16 mm<sup>2</sup> pin-end connectors or 3RA2925-5AB feeder terminals must be used, [see page 3/186](#).  
With 3RT2628, the feeder terminal is in the scope of delivery.

<sup>4)</sup> For conductor cross-sections of 70 mm<sup>2</sup>  
3RV2935-5A feeder terminals must be used, [see page 3/186](#).

Other voltages [according to page 4/48](#) on request.

Accessories and spare parts, [see "SIRIUS 3RT20 contactors", Chapter 3](#).

## Contactors for Special Applications

### SIRIUS 3RT26 capacitor contactors, 12.5 ... 75 kvar **NEW**

#### DC operation

Main, auxiliary and control conductors: Screw terminals



3RT2617-1B.45



3RT262-1B.45



3RT2628-1N.35  
with feeder terminal

Utilization category AC-6b Switching of AC capacitors for an ambient temperature of 60 °C Capacitor rating at operational voltage 50/60 Hz				Auxiliary contacts, unassigned Version		Rated control supply voltage $U_s$ <sup>1)</sup>	DT	Screw terminals	⊕	PU (UNIT, SET, M)	PS*	PG
at 230 V	at 400 V	at 500 V	at 690 V	NO	NC	V DC		Article No.	Price per PU			
kvar	kvar	kvar	kvar									
For screw fixing and snap-on mounting onto TH 35 standard mounting rail												
Size S00 <sup>2)</sup>												
0 ... 7.2	0 ... 12.5	0 ... 15	0 ... 21	1	1	24	B	3RT2617-1BB43		1	1 unit	41B
						110	B	3RT2617-1BF43		1	1 unit	41B
0 ... 7.2	0 ... 12.5	0 ... 15	0 ... 21	0	2	24	B	3RT2617-1BB45		1	1 unit	41B
						110	B	3RT2617-1BF45		1	1 unit	41B
Size S0 <sup>3)</sup>												
3 ... 9.6	6 ... 16.7	7 ... 21	10 ... 29	1	2	24	B	3RT2625-1BB45		1	1 unit	41B
						110	B	3RT2625-1BF45		1	1 unit	41B
4 ... 11.5	7 ... 20	8 ... 25	11 ... 34	1	2	24	B	3RT2626-1BB45		1	1 unit	41B
						110	B	3RT2626-1BF45		1	1 unit	41B
5 ... 14	8 ... 25	10 ... 31	14 ... 43	1	2	24	B	3RT2627-1BB45		1	1 unit	41B
						110	B	3RT2627-1BF45		1	1 unit	41B
6 ... 19	11 ... 33	14 ... 41	19 ... 57	1	2	24	B	3RT2628-1BB45		1	1 unit	41B
						110	B	3RT2628-1BF45		1	1 unit	41B

<sup>1)</sup> Operating range: 0.8 ... 1.1 x  $U_s$

<sup>2)</sup> For conductor cross-sections of 6 mm<sup>2</sup> pin-end connectors must be used.

<sup>3)</sup> For conductor cross-sections of 16 mm<sup>2</sup> pin-end connectors or 3RV2925-5AB feeder terminals must be used, [see page 3/186](#).  
With 3RT2628, the feeder terminal is in the scope of delivery.

Other voltages [according to page 4/48](#) on request.


Accessories and spare parts, [see "SIRIUS 3RT20 contactors", Chapter 3](#).

# Contactors for Special Applications

**NEW** SIRIUS 3RT26 capacitor contactors, 12.5 ... 75 kvar

## AC/DC operation (50/60 Hz and DC)

Main, auxiliary and control conductors: Screw terminals



3RT262-1N.35



3RT2628-1N.35  
with feeder terminal



3RT263-1N.35

Utilization category AC-6b Switching of AC capacitors for an ambient temperature of 60 °C Capacitor rating at operational voltage 50/60 Hz				Auxiliary contacts, unassigned Version		Rated control supply voltage $U_s$ <sup>1)</sup>		DT	Screw terminals	PU (UNIT, SET, M)	PS*	PG
at 230 V	at 400 V	at 500 V	at 690 V	NO	NC	V AC	V DC		Article No.	Price per PU		
kvar	kvar	kvar	kvar									
For screw fixing and snap-on mounting onto TH 35 standard mounting rail												
Size S0 <sup>2)</sup>												
3 ... 9.6	6 ... 16.7	7 ... 21	10 ... 29	1	2	21 ... 28 95 ... 130 200 ... 280	21 ... 28 95 ... 130 200 ... 280	B	3RT2625-1NB35 3RT2625-1NF35 3RT2625-1NP35	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
4 ... 11.5	7 ... 20	8 ... 25	11 ... 34	1	2	21 ... 28 95 ... 130 200 ... 280	21 ... 28 95 ... 130 200 ... 280	B	3RT2626-1NB35 3RT2626-1NF35 3RT2626-1NP35	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
5 ... 14	8 ... 25	10 ... 31	14 ... 43	1	2	21 ... 28 95 ... 130 200 ... 280	21 ... 28 95 ... 130 200 ... 280	B	3RT2627-1NB35 3RT2627-1NF35 3RT2627-1NP35	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
6 ... 19	11 ... 33	14 ... 41	19 ... 57	1	2	21 ... 28 95 ... 130 200 ... 280	21 ... 28 95 ... 130 200 ... 280	B	3RT2628-1NB35 3RT2628-1NF35 3RT2628-1NP35	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
Size S2 <sup>3)</sup>												
10 ... 29	17 ... 50	21 ... 63	29 ... 86	0	2	20 ... 33 83 ... 155 175 ... 280	20 ... 33 83 ... 155 175 ... 280	B	3RT2636-1NB35 3RT2636-1NF35 3RT2636-1NP35	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
14 ... 43	25 ... 75	31 ... 94	43 ... 129	0	2	20 ... 33 83 ... 155 175 ... 280	20 ... 33 83 ... 155 175 ... 280	B	3RT2637-1NB35 3RT2637-1NF35 3RT2637-1NP35	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B

<sup>1)</sup> Coil operating range: 0.7 ... 1.3 x  $U_s$

<sup>2)</sup> For conductor cross-sections of 16 mm<sup>2</sup> pin-end connectors or 3RV2925-5AB feeder terminals must be used, see page 3/186. With 3RT2628, the feeder terminal is in the scope of delivery.

<sup>3)</sup> For conductor cross-sections of 70 mm<sup>2</sup> 3RV2935-5A feeder terminals must be used, see page 3/186.

Other voltages according to page 4/48 on request.

Accessories and spare parts, see "SIRIUS 3RT20 contactors", Chapter 3.

# Contactors for Special Applications

## SIRIUS 3RT2, 3RT1 contactors

### Options

**Rated control supply voltages, possible on request (change of the 10th and 11th positions of the Article No.)**

Rated control supply voltage $U_s$	Contactor type	3RT231., 3RT251.	3RT232., 3RT252.	3RT233., 3RT253.	3RT134.	3RT144.	3RT2617, 3RT262., 3RT263.
	Size	S00	S0	S2	S3	S3	S00, S0, S3

#### Sizes S00 to S3

#### AC operation

**Solenoid coils for 50 Hz** (exception: Size S00: 50 and 60 Hz<sup>1)</sup>)

24 V AC	B0	B0	B0	B0	B0	B0
42 V AC	D0	D0	--	--	D0	--
48 V AC	H0	H0	--	--	H0	--
110 V AC	F0	F0	F0	F0	F0	F0
230 V AC	P0	P0	P0	P0	P0	P0
240 V AC	--	--	U0	U0	U0	--
400 V AC	V0	V0	V0	V0	V0	--

**Solenoid coils for 50 and 60 Hz<sup>1)</sup>**

24 V AC	B0	C2	C2	C2	C2	C2
42 V AC	D0	D2	--	D2	D2	--
48 V AC	H0	H2	H2	H2	H2	--
110 V AC	F0	G2	--	G2	G2	--
220 V AC	N2	N2	N2	N2	N2	N2
230 V AC	P0	L2	L2	L2	L2	L2

**Solenoid coils (for USA and Canada<sup>2)</sup>)**

50 Hz	60 Hz					
110 V AC	120 V AC	K6	K6	K6	K6	--
220 V AC	240 V AC	P6	P6	--	P6	--

**Solenoid coils (for Japan)**

50/60 Hz <sup>3)</sup>	60 Hz <sup>4)</sup>					
100 V AC	110 V AC	G6	G6	--	G6	G6
200 V AC	220 V AC	N6	N6	--	N6	N6
400 V AC	440 V AC	R6	R6	--	R6	R6

#### DC operation

12 V DC	A4	--	--	--	--	--
24 V DC	B4	B4	--	B4	B4	B4
42 V DC	D4	D4	--	D4	D4	--
48 V DC	W4	W4	--	W4	W4	--
60 V DC	--	--	--	--	E4	--
110 V DC	F4	F4	--	F4	F4	F4
125 V DC	G4	G4	--	G4	G4	--
220 V DC	M4	M4	--	M4	M4	--
230 V DC	P4	--	--	--	P4	--

#### Examples

<b>AC operation</b>	3RT2325-1A <b>P00</b>	Contactor with screw terminals; with solenoid coil for 50 Hz for rated control supply voltage 230 V AC
	3RT2325-1A <b>G20</b>	Contactor with screw terminals; with solenoid coil for 50/60 Hz for rated control supply voltage 110 V AC
<b>DC operation</b>	3RT2526-2B <b>B40</b>	Contactor with spring-type terminals; for rated control supply voltage 24 V DC
	3RT2526-2B <b>G40</b>	Contactor with spring-type terminals; for rated control supply voltage 125 V DC

Rated control supply voltage	Contactor type	3RT1456-6A..., 3RT1466-6A..., 3RT1476-6A...	Rated control supply voltage	Contactor type	3RT1456-6N..., 3RT1466-6N..., 3RT1476-6N...	3RT1456-6P..., 3RT1466-6P..., 3RT1476-6P...
$U_{s \min} \dots U_{s \max}^{5)}$	Size	S6, S10, S12	$U_{s \min} \dots U_{s \max}^{5)}$	Size	S6, S10, S12	S6, S10, S12

#### Sizes S6 to S12

#### AC/DC operation (AC 50/60 Hz, DC)

23 ... 26 V AC/DC	B3	21 ... 27.3 V AC/DC	B3	--
42 ... 48 V AC/DC	D3	96 ... 127 V AC/DC	F3	F3
110 ... 127 V AC/DC	F3	200 ... 277 V AC/DC	P3	P3
200 ... 220 V AC/DC	M3			
220 ... 240 V AC/DC	P3			
240 ... 277 V AC/DC	U3			
380 ... 420 V AC/DC	V3			
440 ... 480 V AC/DC	R3			
500 ... 550 V AC/DC	S3			
575 ... 600 V AC/DC	T3			

<sup>1)</sup> Coil operating range  
at 50 Hz: 0.8 ... 1.1 x  $U_s$   
at 60 Hz: 0.85 ... 1.1 x  $U_s$

<sup>2)</sup> Coil operating range  
Size S00: at 50 Hz: 0.85 ... 1.1 x  $U_s$   
at 60 Hz: 0.8 ... 1.1 x  $U_s$   
Size S0 to S3: at 50 Hz and 60 Hz: 0.8 ... 1.1 x  $U_s$

<sup>3)</sup> Coil operating range  
Size S00: at 50/60 Hz: 0.85 ... 1.1 x  $U_s$   
Size S0 to S3: at 50 Hz: 0.8 ... 1.1 x  $U_s$   
at 60 Hz: 0.85 ... 1.1 x  $U_s$

<sup>4)</sup> Coil operating range  
at 60 Hz: 0.8 ... 1.1 x  $U_s$

<sup>5)</sup> Coil operating range: 0.7 x  $U_{s \min}$  ... 1.25 x  $U_{s \max}$



# 

SIRIUS 3RT20 motor contactors, up to 37 kW

## Overview

### Standards

IEC 60947-4-1, EN 60947-4-1

The contactors are finger-safe according to EN 50274. They have spring-type connections as well as screw connections. The size S00 and S0 contactors have spring-type connections for all terminals, the size S2 contactors have them for the auxiliary and control circuit terminals.

### Ambient temperature

The permissible ambient temperature for operation of the contactors (across the full coil operating range) is  $-40$  to  $+70$  °C.

Uninterrupted duty at temperatures  $> +60$  °C reduces the mechanical endurance, the current carrying capacity of the conducting paths and the switching frequency.

### Control and auxiliary circuits

The solenoid coils of the contactors have an extended coil operating range from  $0.7$  to  $1.25$  or  $1.3 \times U_s$  and are fitted as standard with surge suppressors. The opening delay is consequently  $2$  to  $5$  ms longer than for standard contactors.

## Application

For operation in installations which are subject both to considerable variations in the control voltage and to high ambient temperatures, e.g. railway applications under extreme climatic conditions, rolling mills, etc.

Also for control supply voltages with battery buffering to extend the operating time in the event of battery charge failure.

### 3RT20 contactors with conventional coil

#### Control and auxiliary circuits

These contactors have an extended operating range from  $0.7$  to  $1.25 \times U_s$ ; on size S00 the coils are fitted with suppressor diodes, on size S0 with varistors. An additional series resistor is not required.

#### Note:

An additional auxiliary switch block cannot be mounted.

#### Side-by-side mounting

A clearance of  $10$  mm is required for side-by-side mounting at ambient temperatures  $> 60$  °C  $\leq 70$  °C.


### 3RT201 contactors with series resistor

#### Control and auxiliary circuits

The solenoid coils of these contactors have an extended coil operating range from  $0.7$  to  $1.25 \times U_s$  and are fitted as standard with a surge suppressor (suppressor diode or varistor as preferred).

A surge suppressor (a suppressor diode or varistor as preferred) is integrated.

The DC solenoid systems of the contactors are modified (to holding excitation) by means of a series resistor.

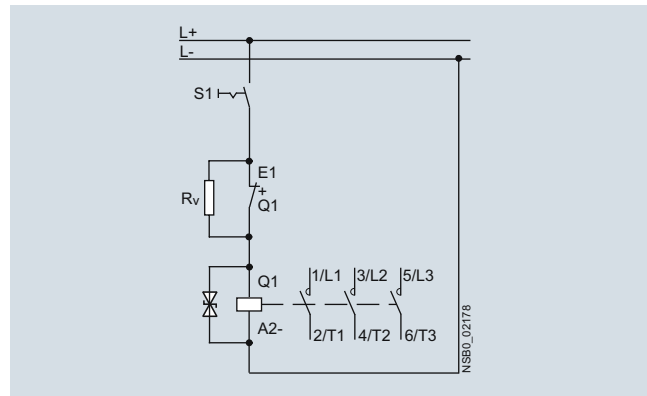

Circuit diagram (version with suppressor diode)

The size S00 contactors are supplied prewired with a plug-on module containing the series resistor. The suppressor diode is integrated. A 4-pole auxiliary switch block (according to EN 50005) can be fitted additionally.

A circuit diagram showing the terminals is stuck onto each contactor. One NC of the auxiliary contacts is required for the series resistor function. The selection and ordering data shows the number of additional, unassigned auxiliary contacts. With size S00 it is possible to extend the number of auxiliary contacts.

#### Side-by-side mounting

At ambient temperatures up to  $70$  °C, the size S00 contactors are allowed to be mounted side by side.

### 3RT202 and 3RT203 contactors with solid-state operating mechanism, extended operating range

#### Control and auxiliary circuits

The solenoid coils of these contactors have an extended coil operating range from  $0.7$  to  $1.25 \times U_s$  and are fitted as standard with varistors to provide protection against overvoltage.

The contactors are energized via upstream control electronics which ensure the coil operating range of  $0.7$  to  $1.25 \times U_s$  at an ambient temperature of  $70$  °C. They are supplied as complete units with integrated coil electronics. A varistor is integrated for damping opening surges in the coil.

The possibility of mounting auxiliary switches is the same as that for equivalent standard contactors for switching motors in the matching size (see exploded drawings of the 3RT20 contactors in Chapter 3, pages 3/6 to 3/8).

#### Side-by-side mounting

At ambient temperatures up to  $70$  °C, size S0 of these contactor versions are allowed to be mounted side by side.

## Contactors for Special Applications

### Contactors with Extended Operating Range $0.7 \dots 1.25 \times U_s$ for Railway Applications

#### SIRIUS 3RT20 motor contactors, up to 37 kW

##### Technical specifications

Type				<b>3RT2017</b>	<b>3RT202.</b>	<b>3RT202.-2XB40-0LA2</b>	<b>3RT202.-2XF40-0LA2</b>
Size				<b>S00</b>	<b>S0</b>	<b>S0</b>	<b>S0</b>
<b>General technical specifications</b>							
<b>Upright mounting position</b>							
• Contactors with series resistor				Special version (on request)			
• Contactors with conventional coil				Special version (on request)			
<b>Ambient temperature</b>							
• During operation	°C			-40 ... +70 <sup>1)</sup>		-40 ... +70	
• During storage	°C			-55 ... +80		-55 ... +80	
<b>Control circuit</b>							
<b>Solenoid coil operating range</b>		DC		0.7 ... 1.25 x U <sub>s</sub>			
<b>Power consumption of the solenoid coils</b>				for cold coil and 1.0 x U <sub>s</sub>			
• Contactors with series resistor	- Closing	W		13	--	--	--
	- Closed	W		4	--	--	--
• Contactors with conventional coil	- Closing	W		2.8	4.5	--	--
	- Closed	W		2.8	4.5	--	--
• Contactors with solid-state operating mechanism	- Closing	W		--	--	6.7	13.2
	- Closed	W		--	--	0.8	1.56

Type				<b>3RT203.-3XB40-0LA2</b>	<b>3RT203.-3XF40-0LA2</b>
Size				<b>S2</b>	<b>S2</b>
<b>General technical specifications</b>					
<b>Upright mounting position</b>					
• Contactors with series resistor					
• Contactors with conventional coil					
<b>Ambient temperature</b>					
• During operation	°C			-40 ... +70	
• During storage	°C			-55 ... +80	
<b>Control circuit</b>					
<b>Solenoid coil operating range</b>			DC	0.7 ... 1.25 x U <sub>s</sub>	
<b>Power consumption of the solenoid coils</b>					
• Contactors with series resistor					
• Contactors with conventional coil					
• Contactors with solid-state operating mechanism	- Closing	W		23	
	- Closed	W		1	

All details and technical specifications not mentioned here are identical to those of the 3RT20 basic versions, [see Chapter 3, "Power contactors for switching motors" → "SIRIUS 3RT20 contactors, 3-pole, up to 37 kW"](#)

<sup>1)</sup> 3RT20 ...-K contactors without the Article No. suffix "-0LA0" are coupling contactors, which are certified for the temperature range -25 °C to +60 °C. For railway applications, an additional certification approves these contactors with a minimum distance of 10 mm for the extended temperature range -40 °C to +70 °C.

# Contactors for Special Applications Contactors with Extended Operating Range 0.7 ... 1.25 x $U_s$ for Railway Applications

SIRIUS 3RT20 motor contactors, up to 37 kW

## Selection and ordering data

### DC operation

#### Spring-type terminals

for screw fixing and snap-on mounting onto standard mounting rails



Solenoid coil with surge suppressor (S00)



3RT201.-2K.4.



3RT201.-2K.42-0LA0


Rated data AC-2 and AC-3 $T_U$ : 70 °C					Auxiliary contacts		Rated control supply voltage $U_s$	DT	Spring-type terminals		PU (UNIT, SET, M)	PS*	PG
Operational current $I_e$ at		Rating <sup>1)</sup> of three-phase motors at			Ident. No.	Version			Configurator				
400 V		230 V	400 V	500 V	690 V			V DC	Article No.	Price per PU			
A		kW	kW	kW	kW								

### 3RT20 contactors for switching motors

#### Size S00


with conventional coil, fitted with suppressor diode

- 1 NO, Ident. No. 10



12	3	5.5	5.5	5.5
12	3	5.5	5.5	5.5


- 1 NC, Ident. No. 01



10 <sup>2)</sup>	1	--	24
01 <sup>2)</sup>	--	1	24


with conventional coil, fitted with varistor

- 1 NO, Ident. No. 10




12	3	5.5	5.5	5.5
12	3	5.5	5.5	5.5

- 1 NC, Ident. No. 01




10 <sup>2)</sup>	1	--	24
01 <sup>2)</sup>	--	1	24

with series resistor, fitted with suppressor diode



12	3	5.5	5.5	5.5
16	4	7.5	10	11

with series resistor, fitted with varistor



12	3	5.5	5.5	5.5
16	4	7.5	10	11

►	3RT2017-2KB41	1	1 unit	41B
B	3RT2017-2KF41	1	1 unit	41B
►	3RT2017-2KB42	1	1 unit	41B
B	3RT2017-2KF42	1	1 unit	41B

B	3RT2017-2LB41	1	1 unit	41B
B	3RT2017-2LF41	1	1 unit	41B
B	3RT2017-2LB42	1	1 unit	41B
B	3RT2017-2LF42	1	1 unit	41B

B	3RT2017-2KB42-0LA0	1	1 unit	41B
B	3RT2017-2KF42-0LA0	1	1 unit	41B
B	3RT2018-2KB42-0LA0	1	1 unit	41B
B	3RT2018-2KF42-0LA0	1	1 unit	41B

B	3RT2017-2LB42-0LA0	1	1 unit	41B
B	3RT2017-2LF42-0LA0	1	1 unit	41B
B	3RT2018-2LB42-0LA0	1	1 unit	41B
B	3RT2018-2LF42-0LA0	1	1 unit	41B

For online configurator, see [www.siemens.com/sirius/configurators](http://www.siemens.com/sirius/configurators).

<sup>1)</sup> Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

<sup>2)</sup> It is not possible to mount an auxiliary switch block. A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C.

<sup>3)</sup> One 4-pole auxiliary switch block according to EN 50005 can be mounted; no distance required for mounting at -40 ... 70 °C.

<sup>4)</sup> NC contact cannot be used because it is used for switching of the series resistor.

Accessories, see "3RT20 contactors", Chapter 3.

## Contactors for Special Applications

Contactors with Extended Operating Range 0.7 ... 1.25 x  $U_s$  for Railway Applications

### SIRIUS 3RT20 motor contactors, up to 37 kW

#### DC operation

##### Spring-type terminals

for screw fixing and snap-on mounting onto standard mounting rails

Solenoid coil fitted with varistor (S0)



3RT202.-2K.40



3RT202.-2X.40-0LA2


Rated data AC-2 and AC-3 $T_U$ : 70 °C					Auxiliary contacts		Rated control supply voltage $U_s$	DT	Spring-type terminals		PU (UNIT, SET, M)	PS*	PG
Operational current $I_e$ at					Ident. No.	Version			Configurator				
400 V	Rating <sup>1)</sup> of three-phase motors at				NO	NC	V DC	Article No.	Price per PU				
230 V	400 V	500 V	690 V										
A	kW	kW	kW	kW									

#### 3RT20 contactors for switching motors

##### Size S0

with conventional operating mechanism<sup>2)</sup>


1 NO + 1 NC, Ident. No. 11



17	4	7.5	10	11	11	1	1	24 110	B	3RT2025-2KB40	1	1 unit	41B
									B	3RT2025-2KF40	1	1 unit	41B
25	5.5	11	11	11	11	1	1	24 110	B	3RT2026-2KB40	1	1 unit	41B
									B	3RT2026-2KF40	1	1 unit	41B
32	7.5	15	18.5	18.5	11	1	1	24 110	B	3RT2027-2KB40	1	1 unit	41B
									B	3RT2027-2KF40	1	1 unit	41B

##### with solid-state operating mechanism

1 NO + 1 NC, Ident. No. 11



17	4	7.5	10	11	11	1	1	24 110	B	3RT2025-2XB40-0LA2	1	1 unit	41B
									B	3RT2025-2XF40-0LA2	1	1 unit	41B
25	5.5	11	11	11	11	1	1	24 110	B	3RT2026-2XB40-0LA2	1	1 unit	41B
									B	3RT2026-2XF40-0LA2	1	1 unit	41B
32	7.5	15	18.5	18.5	11	1	1	24 110	B	3RT2027-2XB40-0LA2	1	1 unit	41B
									B	3RT2027-2XF40-0LA2	1	1 unit	41B
38	7.5	18.5	18.5	18.5	11	1	1	24 110	B	3RT2028-2XB40-0LA2	1	1 unit	41B
									B	3RT2028-2XF40-0LA2	1	1 unit	41B

For online configurator, see [www.siemens.com/sirius/configurators](http://www.siemens.com/sirius/configurators).

<sup>1)</sup> Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

<sup>2)</sup> It is not possible to mount an auxiliary switch block. A clearance of 10 mm is required for side-by-side mounting at ambient temperatures > 60 °C.

Accessories, see "3RT20 contactors", Chapter 3.

# **Contactor for Special Applications** **Contactor with Extended Operating Range 0.7 ... 1.25 x $U_s$ for Railway Applications**

SIRIUS 3RT20 motor contactors, up to 37 kW

**DC operation****Spring-type terminals**

for screw fixing and snap-on mounting onto standard mounting rails

Solenoid coil fitted with varistor (S2)




3RT203.-3X.40-0LA2

Rated data					Auxiliary contacts		Rated control supply voltage $U_s$	DT	<b>Spring-type terminals</b> for auxiliary and control circuits		PU (UNIT, SET, M)	PS*	PG
AC-2 and AC-3 $T_U$ : 70 °C					Ident. No.	Version							
Operational current $I_e$ at							V DC		<b>Configurator</b>				
400 V	230 V	<b>400 V</b>	500 V	690 V									
A	kW	<b>kW</b>	kW	kW	NO	NC			Article No.	Price per PU			

**3RT20 contactors for switching motors****Size S2 NEW**

with solid-state operating mechanism

1 NO + 1 NC, Ident. No. 11



40	11	<b>18.5</b>	22	22	<b>11</b>	1	1	24 110	B	<b>3RT2035-3XB40-0LA2</b>	1	1 unit	41B
									B	<b>3RT2035-3XF40-0LA2</b>	1	1 unit	41B
50	15	<b>22</b>	30	22	<b>11</b>	1	1	24 110	B	<b>3RT2036-3XB40-0LA2</b>	1	1 unit	41B
									B	<b>3RT2036-3XF40-0LA2</b>	1	1 unit	41B
65	18.5	<b>30</b>	37	37	<b>11</b>	1	1	24 110	B	<b>3RT2037-3XB40-0LA2</b>	1	1 unit	41B
									B	<b>3RT2037-3XF40-0LA2</b>	1	1 unit	41B
80	22	<b>37</b>	37	45	<b>11</b>	1	1	24 110	B	<b>3RT2038-3XB40-0LA2</b>	1	1 unit	41B
									B	<b>3RT2038-3XF40-0LA2</b>	1	1 unit	41B

 For online configurator, see [www.siemens.com/sirius/configurators](http://www.siemens.com/sirius/configurators).

1) Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

Accessories, see "3RT20 contactors", Chapter 3.

## Contactors for Special Applications

### Contactors with Extended Operating Range $0.7 \dots 1.25 \times U_s$ for Railway Applications

#### SIRIUS 3RT10 motor contactors, 30 ... 45 kW

##### Overview

##### Standards

IEC 60947-4-1, EN 60947-4-1

The contactors are finger-safe according to EN 50274 (exception: S3 series resistor). On size S3, the auxiliary conductor and coil terminals are all spring-type terminals.

##### Control and auxiliary circuits

Contactors are available with:

- Coils with series resistor
- Coils with solid-state control unit

The solenoid coils of the contactors have an extended coil operating range from  $0.7$  to  $1.25 \times U_s$  and are fitted as standard with varistors to provide protection against overvoltage. The opening delay is consequently 2 to 5 ms longer than for standard contactors.

##### Ambient temperature

The permissible ambient temperature for operation of the contactors (across the full coil operating range) is  $-40\text{ °C}$  to  $+70\text{ °C}$ .


Uninterrupted duty at temperatures  $> +60\text{ °C}$  reduces the mechanical endurance, the current carrying capacity of the conducting paths and the switching frequency.

##### Application

For operation in installations which are subject both to considerable variations in the control voltage and to high ambient temperatures, e.g. railway applications under extreme climatic conditions, rolling mills, etc.

##### 3RT10 contactors with series resistor

The DC solenoid systems of the contactors are modified (to holding excitation) by means of a series resistor.

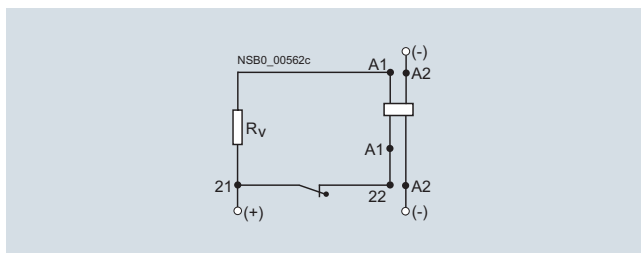

Circuit diagram with series resistor

##### Auxiliary switches

The size S3 contactors are equipped on the front with an auxiliary switch block with 2 NO + 2 NC contacts. The separate series resistor, which is attached laterally next to the contactor on the 35 mm standard mounting rail, is fitted with connecting cables for mounting onto contactors. A circuit diagram showing the terminals is stuck onto each contactor. The NC contact 21-22 of the auxiliary contacts is required for the series resistor function. The selection and ordering data shows the number of additional, unassigned auxiliary contacts.

##### Mounting

The resistor module of the size S3 contactors must be mounted to the left of the contactor owing to the prefabricated connecting cables.

##### Dimensions

Attaching the series resistor increases the width of contactor size S3.

##### 3RT10 contactors with contactor control unit, extended operating range

They are supplied as complete units with a built-on contactor control unit.

##### Control and auxiliary circuits

The contactors are energized via upstream control electronics which ensure the coil operating range of  $0.7$  to  $1.25 \times U_s$  at an ambient temperature of  $70\text{ °C}$ .

A varistor is integrated for damping opening surges in the coil. The opening delay is consequently 2 to 5 ms longer than for standard contactors.

The possibility of mounting auxiliary switches is the same as that for equivalent standard contactors.

##### Mounting

These contactor versions of size S3 are approved for side-by-side mounting at ambient temperatures of up to  $70\text{ °C}$ .

##### Dimensions

Because of the built-on contactor control unit, the height of the size S3 contactors increases by up to 34 mm.

# **Contactors for Special Applications** Contactors with Extended Operating Range $0.7 \dots 1.25 \times U_s$ for Railway Applications

SIRIUS 3RT10 motor contactors, 30 ... 45 kW

## Technical specifications

Type	3RT104.	
Size	S3	
3RT10 contactors with series resistor		
General technical specifications		
Ambient temperature		
• During operation	°C	-40 ... +70
Control circuit		
Solenoid coil operating range	AC/DC	0.7 ... 1.25 x U <sub>s</sub>
Power consumption of the solenoid coils		for cold coil and 1.0 x U <sub>s</sub>
• Closing	W	78
• Closed	W	23
Upright mounting position		--
3RT10 contactors with contactor control unit		
Control circuit		
Solenoid coil operating range		0.7 ... 1.25 x U <sub>s</sub>
Power consumption		for cold coil and 1.0 x U <sub>s</sub>
• Closing	W	19
• Closed	W	12
Upright mounting position		--

All details and technical specifications not mentioned here are identical to those of the 3RT10 basic versions, see Chapter 3,

"Power contactors for switching motors" →  
 "SIRIUS 3RT10 contactors, 3-pole, 15 ... 250 kW"

## Selection and ordering data

**DC operation**  
**Spring-type terminals for auxiliary/control circuits**  
**for screw fixing and snap-on mounting onto standard**  
**mounting rails**  
**Solenoid coil fitted with varistor**




3RT1034.-3K.44-0LA0

Rated data AC-2 and AC-3 $T_U: 70^\circ\text{C}$		Auxiliary contacts		Rated control supply voltage $U_s$		DT	Spring-type terminals for auxiliary and control circuits		PU (UNIT, SET, M)	PS*	PG
Operational current $I_e$ at	Ratings of three-phase motors at	Version					Article No.	Price per PU			
400 V	230 V <b>400 V</b> 500 V   690 V	NO	NC	V DC							
A	kW <b>kW</b> kW   kW										

For screw fixing and snap-on mounting onto  
TH 35 and TH 75 standard mounting rail

### Size S3

with series resistor



65	18.5	<b>30</b>	37	43	2	1 <sup>1)</sup>	24 110
80	22	<b>37</b>	45	55	2	1 <sup>1)</sup>	24 110
95	22	<b>45</b>	55	55	2	1 <sup>1)</sup>	24 110

<sup>1)</sup> The auxiliary contacts are not expandable.

Spare parts, see "3RT10 contactors", Chapter 3.

B	<b>3RT1044-3KB44-0LA0</b>	1	1 unit	41B
B	<b>3RT1044-3KF44-0LA0</b>	1	1 unit	41B
B	<b>3RT1045-3KB44-0LA0</b>	1	1 unit	41B
B	<b>3RT1045-3KF44-0LA0</b>	1	1 unit	41B
B	<b>3RT1046-3KB44-0LA0</b>	1	1 unit	41B
B	<b>3RT1046-3KF44-0LA0</b>	1	1 unit	41B

## Contactors for Special Applications

Contactors with Extended Operating Range  $0.7 \dots 1.25 \times U_s$  for Railway Applications

### SIRIUS 3RT10 motor contactors, 30 ... 45 kW

#### DC operation

for screw fixing and snap-on mounting onto standard mounting rails

Solenoid coil fitted with varistor

PU (UNIT, SET, M) = 1  
 PS\* = 1 unit  
 PG = 41B



3RT104.-1X.40-0LA2




3RT104.-3X.40-0LA2

Rated data AC-2 and AC-3 $T_U$ : up to 70 °C		Auxiliary contacts <sup>1)</sup>	Rated control supply voltage $U_s$	DT	Screw terminals	DT	Spring-type terminals for coil terminals	
Rated operational current $I_e$ up to 400 V	Ratings of three-phase motors at 50 Hz <b>400 V</b>	Version			Article No.	Price per PU	Article No.	Price per PU
A	kW	<div><div>NO</div><div>NC</div></div>	V DC					

For screw fixing and snap-on mounting onto TH 35 and TH 75 standard mounting rail

#### Size S3

##### Contactor control unit



65	<b>30</b>	--	--	24	B	<b>3RT1044-1XB40-0LA2</b>	B	<b>3RT1044-3XB40-0LA2</b>
		--	--	110	B	<b>3RT1044-1XF40-0LA2</b>	B	<b>3RT1044-3XF40-0LA2</b>
80	<b>37</b>	--	--	24	B	<b>3RT1045-1XB40-0LA2</b>	B	<b>3RT1045-3XB40-0LA2</b>
		--	--	110	B	<b>3RT1045-1XF40-0LA2</b>	B	<b>3RT1045-3XF40-0LA2</b>
95	<b>45</b>	--	--	24	B	<b>3RT1046-1XB40-0LA2</b>	B	<b>3RT1046-3XB40-0LA2</b>
		--	--	110	B	<b>3RT1046-1XF40-0LA2</b>	B	<b>3RT1046-3XF40-0LA2</b>

<sup>1)</sup> Auxiliary switch blocks mountable as standard contactors.



# 

## 

### 

#### 

##### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

###### 

######

## Contactors for Special Applications

Contactors with Extended Operating Range  $0.7 \dots 1.25 \times U_s$  for Railway Applications

### 3TB5 motor contactors, 55 ... 200 kW

#### Selection and ordering data

##### 3TB50 to 3TB56 contactors


##### for screw fixing

##### Solenoid coil fitted with varistor

Size	Rated data AC-2 and AC-3 at 55 °C					Auxiliary contacts <sup>2)</sup> Version		Rated control supply voltage $U_s$	DT	Screw terminals	Price per PU	PU (UNIT, SET, M)	PS*	PG
	Opera- tional current $I_e$ at	Ratings <sup>1)</sup> of three-phase motors at								Article No.				
	400 V	230 V	400 V	500 V	690 V									
	A	kW	kW	kW	kW	NO	NC	V DC						

#### Contactors for switching AC voltage DC operation

Terminal designations according to EN 50012 or EN 50005



<b>6</b>	110	37	<b>55</b>	75	90	2	1 <sup>3)</sup>	24 110	B	<b>3TB5017-0LB4</b> <b>3TB5017-0LF4</b>	1 1	1 unit 1 unit	41B 41B
<b>8</b>	170	55	<b>90</b>	110	132	2	1 <sup>3)</sup>	24 110	C D	<b>3TB5217-0LB4</b> <b>3TB5217-0LF4</b>	1 1	1 unit 1 unit	41B 41B
<b>10</b>	250	75	<b>132</b>	160	200	2	1 <sup>3)</sup>	24 110	C A	<b>3TB5417-0LB4</b> <b>3TB5417-0LF4</b>	1 1	1 unit 1 unit	41B 41B
<b>12</b>	400	115	<b>200</b>	255	355	2	1 <sup>3)</sup>	110	►	<b>3TB5617-0LF4</b>	1	1 unit	41B

<sup>1)</sup> Guide value for 4-pole standard motors at 50 Hz 400 V AC. The actual starting and rated data of the motor to be switched must be considered when selecting the units.

<sup>2)</sup> The number of auxiliary contacts cannot be increased.

<sup>3)</sup> One NC contact used for series resistor.

#### Accessories

##### Spare parts

For contactors	Remarks	Rated control supply voltage $U_s$	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Type	V DC						

##### Solenoid coils

##### For contactors with extended operating range

<b>6</b>	3TB50	with series resistor, without varistor	24 110	C D	<b>3TY6503-0LB4</b> <b>3TY6503-0LF4</b>	1 1	1 unit 1 unit	41B 41B
<b>8</b>	3TB52 and 3TC52		24 110	D D	<b>3TY6523-0LB4</b> <b>3TY6523-0LF4</b>	1 1	1 unit 1 unit	41B 41B
<b>10</b>	3TB54		24 110	C C	<b>3TY6543-0LB4</b> <b>3TY6543-0LF4</b>	1 1	1 unit 1 unit	41B 41B
<b>12</b>	3TB56 and 3TC56		24 110	C C	<b>3TY6563-0LB4</b> <b>3TY6563-0LF4</b>	1 1	1 unit 1 unit	41B 41B

All spare parts not mentioned here are identical to those of the basic versions of the 3TB5 contactors, see Chapter 3.

#

## Contactors for Special Applications

Contactors with Extended Operating Range 0.7 ... 1.25 x  $U_s$  for Railway Applications

### 3TC contactors for switching DC voltage, 2-pole

#### Selection and ordering data

**3TC44:** for screw fixing and snap-on mounting onto 35 mm standard mounting rail

**3TC48 to 3TC56:** screw fixing

**Solenoid coil fitted with varistor**




3TC48

Size	Utilization category	Rated operational current $I_e$ at 750 V	Rated power of loads at					Auxiliary contacts <sup>1)</sup>	Rated control supply voltage $U_s$	DT	Screw terminals	PU (UNIT, SET, M)	PS*	PG
			220 V	440 V	600 V	750 V		Version			Article No.	Price per PU		
			kW	kW	kW	kW		NO NC	V DC					

#### Contactors for switching DC voltage DC operation

Terminal designations according to EN 50012 and EN 50005



2	DC-1	32	7	14	19.2	24	2	1 <sup>2)</sup>	24	B	3TC4417-0LB4	1	1 unit	41B
	DC-3/DC-5	7.5	5	9	9	4			110	C	3TC4417-0LF4	1	1 unit	41B
4	DC-1	75	16.5	33	45	56	2	1 <sup>2)</sup>	24	C	3TC4817-0LB4	1	1 unit	41B
	DC-3/DC-5	75	13	27	38	45			110	C	3TC4817-0LF4	1	1 unit	41B
8	DC-1	170	48	97	132	165	2	1 <sup>2)</sup>	24	C	3TC5217-0LB4	1	1 unit	41B
	DC-3/DC-5	170	41	82	110	110			110	C	3TC5217-0LF4	1	1 unit	41B
12	DC-1	400	88	176	240	300	2	1 <sup>2)</sup>	24	C	3TC5617-0LB4	1	1 unit	41B
	DC-3/DC-5	400	70	140	200	250			110	C	3TC5617-0LF4	1	1 unit	41B

1) The number of auxiliary contacts cannot be increased.

2) One NC contact used for series resistor.

#### Accessories

##### Spare parts

For contactors	Remarks	Rated control supply voltage $U_s$	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Type	V DC						

##### Arc chutes

##### For contactors with extended operating range

2	3TC4417-0L..	with cutout for resistor mounting	B	3TY2442-0B		1	1 unit	41B
---	--------------	-----------------------------------	---	------------	--	---	--------	-----

##### Solenoid coils

##### For contactors with extended operating range

2	3TC44	with series resistor, without varistor			24			
			C	3TY6443-0LB4		1	1 unit	41B
			C	3TY6443-0LF4		1	1 unit	41B
4	3TC48				24			
			C	3TY6483-0LB4		1	1 unit	41B
			C	3TY6483-0LF4		1	1 unit	41B

All spare parts not mentioned here are identical to those of the basic versions of the 3TC contactors, see pages 4/69 and 4/70.

## Contactors for Special Applications

### Contactors for Switching DC Voltage

3TC contactors, 1- and 2-pole, 32 ... 400 A

#### Overview

##### 3TC4 and 3TC5

IEC 60947-1, EN 60947-1,  
IEC 60947-4-1, EN 60947-4-1,  
IEC 60947-5-1, EN 60947-5-1 (auxiliary switches)

The contactors are finger-safe according to EN 50274. Terminal covers may have to be fitted onto the connecting bars, depending on the configuration with other devices.

The DC motor ratings given in the tables are applicable to the DC-3 and DC-5 utilization categories with two-pole switching of the load or with the two conducting paths of the contactor connected in series.

One contactor conducting path can switch full power up to 220 V. For voltages over 220 V, the two conducting paths are to be switched in series, see "Technical specifications, main circuit", page 4/63.

##### Auxiliary contacts

The contactors are equipped with two lateral auxiliary switch blocks each with 1 NO + 1 NC contact. On the contactors 3TC48 to 3TC56 with AC operation, a second auxiliary switch block can be mounted on the right and left. On contactors with DC operation, expansion of the auxiliary contacts is not possible.

##### 3TC7

IEC 60947-4-1, EN 60947-4-1.

The contactors are suitable for use in any climate. They are suitable for switching and controlling DC motors as well as all other DC circuits.

The solenoid excitation is configured for a particularly large operating range. It is between 0.7 or 0.8 to  $1.2 \times U_s$ .

3TC74 contactors can be used at up to 750 V/400 A and 50 Hz in AC-1 operation.

For voltages over 750 V, the two conducting paths (3TC74: two contactors) are to be switched in series, see "Technical specifications, main circuit", page 4/64.

#### Application

The contactors are suitable for switching and controlling DC motors as well as all other DC circuits.

A version with an especially large actuating voltage is available for operation in electrically driven vehicles and in switchgear with a particularly large coil operating range (see page 4/60).

#### Technical specifications

Type		3TC4 and 3TC7	3TC5
<b>Rated data of the auxiliary contacts</b>			
<b>Rated insulation voltage <math>U_i</math></b> (Pollution degree 3)	V	690	
<b>Conventional thermal current <math>I_{th}</math> = Rated operational current <math>I_e/AC-12</math></b>	A	10	10
<b>AC load</b>			
<b>Rated operational current <math>I_e/AC-15/AC-14</math></b> • for rated operational voltage $U_e$			
24 V	A	10	10
110 V	A	10	10
125 V	A	10	10
220 V	A	6	6
230 V	A	5.6	5.6
380 V	A	4	4
400 V	A	3.6	3.6
500 V	A	2.5	2.5
660 V	A	2.5	2.5
690 V	A	--	--
<b>DC load</b>			
<b>Rated operational current <math>I_e/DC-12</math></b> • for rated operational voltage $U_e$			
24 V	A	10	10
60 V	A	10	10
110 V	A	3.2	8
125 V	A	2.5	6
220 V	A	0.9	2
440 V	A	0.33	0.6
600 V	A	0.22	0.4
<b>Rated operational current <math>I_e/DC-13</math></b> • for rated operational voltage $U_e$			
24 V	A	10	10
48 V	A	5	5
110 V	A	1.14	2.4
125 V	A	0.98	2.1
220 V	A	0.48	1.1
440 V	A	0.13	0.32
600 V	A	0.07	0.21
<b>3TC44 ... 3TC56</b>			
<b>Ⓢ and Ⓢ rated data of the auxiliary contacts</b>			
Rated voltage, max.	V AC	600	
Switching capacity		A 600, P 600	

## Contactors for Special Applications


### Contactors for Switching DC Voltage

#### 3TC contactors, 1- and 2-pole, 32 ... 400 A

Type


3TC44 ... 3TC78

#### Contact endurance of the main contacts

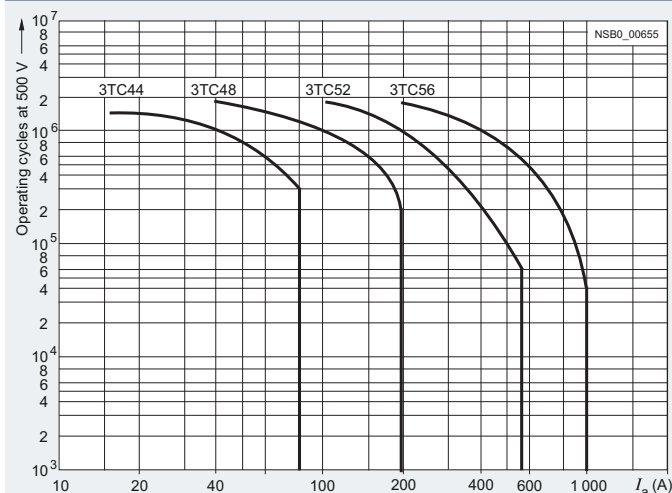

3TC44 to 3TC56 contactors

Legend for the diagrams:

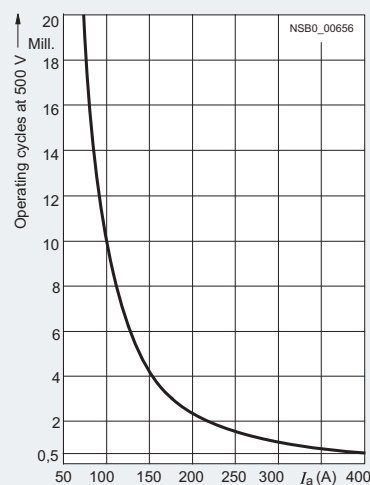 $I_a$  = Breaking current

3TC74 and 3TC78 contactors


Contactors

Type  
Size3TC44  
23TC48  
43TC52  
83TC56  
12

#### General technical specifications

##### Permissible mounting position

The contactors are designed for operation on a vertical mounting surface.



##### Mechanical endurance

Operating cycles

10 million

##### Electrical endurance

Operating cycles

1)<sup>1)</sup>

##### Rated insulation voltage $U_i$ (pollution degree 3)

V

800

1 000

##### Protective separation between the coil and the main contacts acc. to IEC 60947-1, Appendix N

V

up to 300

up to 660

##### Mirror contacts<sup>2)</sup>

A mirror contact is an auxiliary NC contact that cannot be closed simultaneously with an NO main contact.

Yes, acc. to IEC 60947-4-1, Appendix F

##### Permissible ambient temperature

- During operation
- During storage

°C

-25 ... +55

°C

-50 ... +80

##### Degree of protection acc. to IEC 60947-1, Appendix C

IP00/open, for AC operation, coil assembly IP40

##### Shock resistance

Rectangular pulse

g/ms

7.5/5 and 3.4/10

10/5 and 5/10

12/5 and 5.5/10

12/5 and 5.6/10

#### Short-circuit protection

##### Main circuit

Fuse links, operational class gG:

LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE

- Type of coordination "1"
- Type of coordination "2"

A

50

160

250

400

A

35

63

80

250

##### Auxiliary circuit

(Short-circuit current  $I_k \leq 1$  kA)

- Fuse links, operational class gG: DIAZED, type 5SB; NEOZED, type 5SE

A

16

- Miniature circuit breaker with C characteristic

A

10



<sup>1)</sup> See the endurance diagram above.

<sup>2)</sup> For 3TC44, one NC contact each must be connected in series for the right and left auxiliary switch block respectively.

Rated data of the auxiliary contacts, see page 4/61.

# Contactors for Special Applications Contactors for Switching DC Voltage

**3TC contactors, 1- and 2-pole, 32 ... 400 A**

Type					
Size					
Dimensions (W x H x D)					
• DC operation					
• AC operation					
		mm			
		mm			
			<b>3TC44</b>	<b>3TC48</b>	<b>3TC52</b>
			<b>2</b>	<b>4</b>	<b>8</b>
			70 x 85 x 141	100 x 183 x 180	135 x 238 x 232
			70 x 85 x 100	100 x 183 x 154	135 x 238 x 200
					<b>3TC56</b>
					<b>12</b>
					160 x 279 x 310
					160 x 279 x 251
<b>Control circuit</b>					
<b>Solenoid coil operating range</b>			0.8 ... 1.1 x $U_s$		
<b>Power consumption of the solenoid coils</b> (for cold coil and 1.0 x $U_s$ )					
• DC operation	- Closing = Closed	W	10	19	30
• AC operation, 50 Hz coil	- Closing	VA/p.f.	68/0.86	300/0.5	640/0.48
	- Closed	VA/p.f.	10/0.29	26/0.24	46/0.23
• AC operation, 60 Hz coil	- Closing	VA/p.f.	95/0.79	365/0.45	730/0.38
	- Closed	VA/p.f.	12/0.3	35/0.26	56/0.24
• AC operation, 50/60 Hz coil	- Closing at 50 Hz/60 Hz	VA/p.f.	79/73/0.83/0.78	--	--
	- Closed at 50 Hz/60 Hz	VA/p.f.	11/9/0.28/0.27	--	--
<b>Operating times</b> (for 0.8 ... 1.1 x $U_s$ ) Total break time = Opening delay + Arcing time			(The values apply up to and including 20 % undervoltage, 10 % overvoltage, as well as when the coil is cold and warm)		
• DC operation	- Closing delay	ms	35 ... 190	90 ... 380	120 ... 400
	- Opening delay <sup>1)</sup>	ms	10 ... 25	17 ... 28	22 ... 35
• AC operation	- Closing delay	ms	10 ... 40	20 ... 50	20 ... 50
	- Opening delay <sup>1)</sup>	ms	5 ... 25	5 ... 30	10 ... 30
• Arcing time	- DC-1	ms	20		
	- DC-3/DC-5	ms	30		
<b>Main circuit</b>					
<b>Load rating with DC</b>					
<b>Utilization category DC-1, switching resistive loads (L/R ≤ 1 ms)</b>					
• Rated operational currents $I_e$ (at 55 °C)	up to $U_e$ 750 V	A	32	75	220
• Minimum conductor cross-section		mm <sup>2</sup>	6	25	95
• Rated power at $U_e$ (≤ 220 V DC: one conducting path, > 220 V DC: two conducting paths in series)	at 220 V	kW	7	16.5	48
	440 V	kW	14	33	97
	600 V	kW	19.2	45	132
	750 V	kW	24	56	165
<b>Utilization category DC-3 and DC-5</b> <b>Shunt-wound and series-wound motors (L/R ≤ 15 ms)</b>					
• Rated operational currents $I_e$ (at 55 °C)	up to 220 V	A	32	75	220
	440 V	A	29	75	220
	600 V	A	21	75	220
	750 V	A	7.5	75	170
• Rated power at $U_e$ (≤ 220 V DC: one conducting path, > 220 V DC: two conducting paths in series)	at 110 V	kW	2.5	6.5	20
	220 V	kW	5	13	41
	440 V	kW	9	27	82
	600 V	kW	9	38	110
	750 V	kW	4	45	110
<b>Switching frequency</b>					
<b>Switching frequency z</b> in operating cycles/hour					
AC/DC operation					
• with resistive load DC-1		h <sup>-1</sup>	1 500	1 000	
• for inductive load DC-3/DC-5		h <sup>-1</sup>	750	600	
<b>Conductor cross-sections (1 or 2 conductors connectable)</b>					
<b>Main conductors:</b>			 <b>Screw terminals</b>		
• Solid	mm <sup>2</sup>		2 x (2.5 ... 10)	2 x (6 ... 16)	--
• Finely stranded with end sleeve	mm <sup>2</sup>		2 x (1.5 ... 4)	--	--
• Stranded with cable lug	mm <sup>2</sup>		2 x 16	2 x 35	2 x 120
• Pin-end connector to DIN 46231	mm <sup>2</sup>		2 x (1 ... 6)	--	--
• Busbars	mm		--	15 x 2.5	25 x 4
• Terminal screw			M5	M6	M10
<b>Auxiliary conductors:</b>					
• Solid	mm <sup>2</sup>		2 x (1 ... 2.5)		
• Finely stranded with end sleeve	mm <sup>2</sup>		2 x (0.75 ... 1.5)		


<sup>1)</sup> The opening delay times can increase if the contactor coils are damped against voltage peaks. The 3TC44 contactors are not allowed to be fitted with diodes.

Rated data of the auxiliary contacts, [see page 4/61](#).

# Contactors for Special Applications Contactors for Switching DC Voltage

## 3TC contactors, 1- and 2-pole, 32 ... 400 A

Type  
Type  
Dimensions



mm


**3TC74**  
**1-pole contactors**  
78 x 352 x 276

**3TC78**  
**2-pole contactors**  
160 x 366 x 290

### General technical specifications

#### Permissible mounting position

The contactors are designed for operation on a vertical mounting surface.



<b>Mechanical endurance</b>	Operating cycles	30 million
<b>Electrical endurance</b>	Operating cycles	1)
<b>Rated insulation voltage</b> $U_i$ (pollution degree 3)	V	1 500
<b>Rated impulse withstand voltage</b> $U_{imp}$	kV	8
<b>Protective separation</b> between the coil and the main contacts acc. to IEC 60947-1, Appendix N	V	630
<b>Permissible ambient temperature</b>	°C	-25 ... +55
<b>Degree of protection</b> acc. to IEC 60947-1 Appendix C		IP00/open

### Short-circuit protection

#### Main circuit

Fuse links, operational class gG:

LV HRC, type 3NA

- Type of coordination "1"
- Type of coordination "2"

**Auxiliary circuit** (short-circuit current  $I_k \leq 1$  kA)

- Fuse links, operational class gG:  
DIAZED, type 5SB; NEOZED, type 5SE
- Miniature circuit breaker with C characteristic

### Control circuit

#### Solenoid coil operating range

• DC operation	at $U_c = 24$ V	0.8 ... 1.2 x $U_s$
	at $U_c > 24$ V	0.7 ... 1.2 x $U_s$
• AC operation	at $U_c = 24$ V	0.7 ... 1.15 x $U_s$
	at $U_c > 24$ V	0.7 ... 1.14 x $U_s$

#### Power consumption of the solenoid coils (for cold coil and 1.0 x $U_s$ )

• DC operation	Closing = Closed	W	46	92
• AC operation, 50 Hz	Closing, = Closed	VA p.f.	80 0.95	160 0.95

#### Operating times

(Total break time = Opening delay + Arcing time)

• AC and DC operation	- Closing delay	ms	60 ... 100
	- Opening delay	ms	20 ... 35
• Arcing time at 0.06 ... 4 x $I_e$		ms	40 ... 70

(The values apply up to and including 15 % undervoltage, 10 % overvoltage, as well as when the coil is cold and warm)

### Main circuit

#### Load rating with DC

##### Utilization category DC-1, switching resistive loads ( $L/R \leq 1$ ms)

• Rated operational current $I_g$ /DC-1 (at 55 °C)	A	500	500
• Minimum conductor cross-section	mm <sup>2</sup>	2 x 150	2 x 150
• Rated power ( $\leq 750$ V DC: one conducting path, > 750 V DC: two conducting paths in series)	at 220 V	kW	110
	440 V	kW	220
	600 V	kW	300
	750 V	kW	375
	1200 V	kW	600
	1500 V	kW	750
• Critical currents, without arc extinction	at 440 V	A	$\leq 7$
	600 V	A	$\leq 13$
	750 V	A	$\leq 15$
	$\leq 800$ V	A	$\leq 7$
	1200 V	A	$\leq 13$
	1500 V	A	$\leq 15$

##### Utilization categories DC-3 and DC-5, switching DC motors

<b>Permissible rated current for regenerative braking</b> at 110 ... 600 V	A	400
---	---	-----

### Switching frequency

**Switching frequency z** in operating cycles/hour

AC/DC operation

- with resistive load DC-1
- for inductive load DC-3/DC-5

$h^{-1}$	750	1 000
$h^{-1}$	500	500

1) Endurance, see page 4/62.


2) See "Selection and ordering data", page 4/66.

Rated data of the auxiliary contacts, see page 4/61.



# Contactors for Special Applications Contactors for Switching DC Voltage

3TC contactors, 1- and 2-pole, 32 ... 400 A

Type		<b>3TC74</b>	<b>3TC78</b>
Type		<b>1-pole contactors</b>	<b>2-pole contactors</b>
<b>Conductor cross-sections</b>			
<b>Main conductors</b>		 <b>Screw terminals</b>	
• Stranded with cable lug	mm <sup>2</sup>	2 x ... 150	
• Busbars	mm	2 x (30 x 4)	
<b>Auxiliary conductors</b>			
• Solid	mm <sup>2</sup>	1 ... 2.5	
• Finely stranded with end sleeve	mm <sup>2</sup>	0.75 ... 1.5	

## Selection and ordering data




3TC44

3TC48

Size	Utilization category <sup>1)</sup>	Operat. current $I_e^{(3)}$	Ratings of DC motors at					Auxiliary contacts <sup>2)</sup>		Rated control supply voltage $U_s$	DT	Screw terminals		PU (UNIT, SET, M)	PS*	PG
			110 V	220 V	440 V	600 V	750 V	Version								
								NO	NC	V						
												Article No.	Price per PU			

### 3TC44 to 3TC56 two-pole contactors

Terminal designations according to EN 50012



#### DC operation

##### Screw fixing and snap-on mounting onto TH 35 standard mounting rail

2	DC-3, DC-5 32	2.5	5	9	9	4	2	2	24 DC 110 DC 220 DC	▶ ▶ ▶	3TC4417-0AB4 3TC4417-0AF4 3TC4417-0AM4	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
Screw fixing														
4	DC-3, DC-5 75	6.5	13	27	38	45	2	2	24 DC 110 DC 220 DC	A A A	3TC4817-0AB4 3TC4817-0AF4 3TC4817-0AM4	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
8	DC-3, DC-5 220 <sup>4)</sup>	20	41	82	110	110	2	2	24 DC 110 DC 220 DC	C C C	3TC5217-0AB4 3TC5217-0AF4 3TC5217-0AM4	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B
12	DC-3, DC-5 400	35	70	140	200	250	2	2	24 DC 110 DC 220 DC	C C C	3TC5617-0AB4 3TC5617-0AF4 3TC5617-0AM4	1 1 1	1 unit 1 unit 1 unit	41B 41B 41B

#### AC operation, 50 Hz

##### Screw fixing and snap-on mounting onto TH 35 standard mounting rail

2	DC-3, DC-5 32	2.5	5	9	9	4	2	2	220/230 AC <sup>5)</sup> 110/110 AC	▶ ▶	3TC4417-0BP0 3TC4417-0BF0	1 1	1 unit 1 unit	41B 41B
Screw fixing														
4	DC-3, DC-5 75	6.5	13	27	38	45	2	2	220/230 AC <sup>5)</sup> 110 AC	A C	3TC4817-0BP0 3TC4817-0BF0	1 1	1 unit 1 unit	41B 41B
8	DC-3, DC-5 220 <sup>4)</sup>	20	41	82	110	110	2	2	220/230 AC <sup>5)</sup> 110 AC	A C	3TC5217-0BP0 3TC5217-0BF0	1 1	1 unit 1 unit	41B 41B
12	DC-3, DC-5 400	35	70	140	200	250	2	2	220/230 AC <sup>5)</sup> 110 AC	C C	3TC5617-0BP0 3TC5617-0BF0	1 1	1 unit 1 unit	41B 41B

Other rated control supply voltages [according to page 4/67](#) on request.

1) Permissible load for DC-1 utilization category, [see detailed technical specifications in the reference manual "Contactors and Contactor Assemblies"](#).

2) The fitting of auxiliary switches cannot be altered on DC-operated contactors.

3) The following rated operational currents are permitted for reversing duty with 3TC44 to 3TC56 contactors:

Contactor Type	Rated operational voltage	
	110 V, 220 V	440 V
3TC44	32 A	7 A
3TC48	75 A	75 A
3TC52	170 A	170 A
3TC56	400 A	400 A

4) At > 600 V:  $I_e = 170$  A.

5) Operating range at 220 V: 0.85 to 1.15 x  $U_s$

## Contactors for Special Applications

### Contactors for Switching DC Voltage

#### 3TC contactors, 1- and 2-pole, 32 ... 400 A



3TC74




3TC78

Size	Utilization category <sup>1)</sup>	Operational current $I_e$	Ratings of DC motors at								Auxiliary contacts <sup>2)</sup>	Rated control supply voltage $U_s$	DT	Screw terminals	⊕	PU (UNIT, SET, M)	PS*	PG
			110 V	220 V	440 V	600 V	750 V	1200 V	1500 V	Version				Article No.	Price per PU			
			A	kW	kW	kW	kW	kW	kW		NO	NC	V					

#### 3TC74 1-pole contactors · Operational voltage up to 750 V

##### DC operation


Terminal designations according to EN 50005



12	DC-3, DC-5	400	35	70	140	200	250	--	--	4	4	24 DC 110 DC	C C	<b>3TC7414-0EB</b> <b>3TC7414-0EF</b>		1 1	1 unit 1 unit	41B 41B
----	------------	-----	----	----	-----	-----	-----	----	----	---	---	-----------------	--------	--	--	--------	------------------	------------

##### AC operation, 50 Hz

Terminal designations according to EN 50005




12	DC-3, DC-5	400	35	70	140	200	250	--	--	4	4	230/220 AC <sup>3)</sup>	C	<b>3TC7414-1CM</b>		1	1 unit	41B
----	------------	-----	----	----	-----	-----	-----	----	----	---	---	--------------------------	---	--------------------	--	---	--------	-----

#### 3TC78 2-pole contactors · Operational voltage up to 1500 V

##### DC operation


Terminal designations according to EN 50005



12	DC-3, DC-5	400	35	70	140	200	250	400	500	4	4	24 DC 110 DC	C C	<b>3TC7814-0EB</b> <b>3TC7814-0EF</b>		1 1	1 unit 1 unit	41B 41B
----	------------	-----	----	----	-----	-----	-----	-----	-----	---	---	-----------------	--------	--	--	--------	------------------	------------

##### AC operation, 50 Hz

Terminal designations according to EN 50005



12	DC-3, DC-5	400	35	70	140	200	250	400	500	4	4	230/220 AC <sup>3)</sup>	C	<b>3TC7814-1CM</b>		1	1 unit	41B
----	------------	-----	----	----	-----	-----	-----	-----	-----	---	---	--------------------------	---	--------------------	--	---	--------	-----

<sup>1)</sup> Permissible load for DC-1 utilization category, see detailed technical specifications in the reference manual "Contactors and Contactor Assemblies".

<sup>2)</sup> The fitting of auxiliary switches cannot be altered on DC-operated contactors.

<sup>3)</sup> Upper operating range limit at 230 V:  $1.14 \times U_s$

Other rated control supply voltages according to page 4/67 on request.

Spare parts, see page 4/69.

# **Contactors for Special Applications** **Contactors for Switching DC Voltage**

**3TC contactors, 1- and 2-pole, 32 ... 400 A**

## Options


**Rated control supply voltages (change of the 10th and 11th digits of the Article No.)**

Rated control supply voltage $U_s$	Contactor type	3TC44	3TC48	3TC52/56	3TC74/78
<b>AC operation</b>					
<b>Solenoid coils for 50 Hz</b>					
24 V AC		B0	B0	--	--
110 V AC		F0	F0	F0	--
230/220 V AC		P0 <sup>1)</sup>	P0 <sup>1)</sup>	P0 <sup>1)</sup>	M <sup>2)</sup>
240 V AC		U0	U0	--	--
<b>AC operation</b>					
<b>Solenoid coils for 50/60 Hz</b>					
24 V AC		C2	--	--	--
110 V AC		G2	--	--	--
120 V AC		K2	--	--	--
220 V AC		N2	--	--	--
230 V AC		L2	--	--	--
<b>DC operation</b>					
24 V DC		B4	B4	B4	B
48 V DC		W4	W4	--	--
60 V DC		E4	E4	--	--
110 V DC		F4	F4	F4	F
125 V DC		G4	G4	--	--
220 V DC		M4	M4	M4	M
230 V DC		P4	P4	--	--

<sup>1)</sup> Operating range at 220 V or 380 V:  $0.85$  to  $1.15 \times U_s$   
lower operating range limit according to IEC 60947.

<sup>2)</sup> Upper operating range limit at 230 V:  $1.14 \times U_s$ 







## Accessories

For contactors		Version Auxiliary contacts		DT	Screw terminals	PU (UNIT, SET, M)	PS*	PG		
Size	Type	NO	NC		Article No.	Price per PU				
Second auxiliary switch blocks (only for AC operation)										
4	3TC48	2nd auxiliary switch block, left		►	3TY6501-1K		1	1 unit	41B	
		1	1							
		2nd auxiliary switch block, right		D						3TY6501-1L
1	1	--								
8 and 12	3TC52, 3TC56	2nd auxiliary switch block, left		C	3TY6561-1K		1	1 unit	41B	
		1	1							
		2nd auxiliary switch block, right		C						3TY6561-1L
1	1	--								
Solid-state compatible auxiliary switch blocks										
 5TY7561-1.	2 and 4	For operation in dusty atmospheres and in solid-state circuits with rated operational currents <i>I<sub>e</sub></i> AC-14 and DC-13 of 1 ... 300 mA at 3 ... 60 V		►	3TY7561-1UA00		1	1 unit	41B	
		2nd auxiliary switch block, left or right (replacement for 3TY6561-1U, 3TY6561-1V)								
		Mounting:								
		1 CO contact								
		Left	Right							

## Contactors for Special Applications

### Contactors for Switching DC Voltage


#### 3TC contactors, 1- and 2-pole, 32 ... 400 A

For contactors		Version	Rated control supply voltage $U_s$		DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Type		V AC	V DC						
Surge suppressors · Varistors										
 3TX7402-3.	2	3TC44 <sup>1)</sup>	Varistors <sup>2)</sup> with line spacer, for mounting onto the coil terminal	24 ... 48	24 ... 70	A	3TX7402-3G 3TX7402-3H 3TX7402-3J 3TX7402-3K 3TX7402-3L	1	1 unit	41B
				48 ... 127	70 ... 150	A				
				127 ... 240	150 ... 250	A				
				240 ... 400	--	C				
				400 ... 600	--	C				
 3TX7462-3.	4	3TC48	Varistors <sup>2)</sup> for sticking onto the contactor base or for mounting separately	24 ... 48	24 ... 70	A	3TX7462-3G 3TX7462-3H 3TX7462-3J 3TX7462-3K 3TX7462-3L	1	1 unit	41B
				48 ... 127	70 ... 150	B				
				127 ... 240	150 ... 250	A				
				240 ... 400	--	B				
				400 ... 600	--	B				
 3TX7462-3.	8 and 12	3TC52, 3TC56	Varistors for sticking onto the contactor base or for mounting separately	24 ... 48	--	A	3TX7462-3G 3TX7462-3H 3TX7462-3J 3TX7462-3K 3TX7462-3L	1	1 unit	41B
				48 ... 127	--	B				
				127 ... 240	--	A				
				240 ... 400	--	B				
				400 ... 600	--	B				
 3TX7522-3.	8 and 12	3TC52, 3TC56	Varistors <sup>2)</sup> for separate screw fixing or snapping onto TH 35 standard mounting rail	--	24 ... 70	B	3TX7522-3G 3TX7522-3H 3TX7522-3J	1	1 unit	41B
				--	70 ... 150	B				
				--	150 ... 250	B				
Surge suppressors · RC elements										
 3TX7462-3., 3TX7522-3.	4	3TC48	RC elements for lateral snapping onto auxiliary switch or TH 35 standard mounting rail	24 ... 48	--	C	3TX7462-3R 3TX7522-3R 3TX7462-3S 3TX7522-3S 3TX7462-3T 3TX7522-3T 3TX7462-3U 3TX7462-3V	1	1 unit	41B
				--	24 ... 70	B				
				48 ... 127	--	A				
				--	70 ... 150	B				
				127 ... 240	--	A				
				--	150 ... 250	B				
	8 and 12	3TC52, 3TC56	RC elements for lateral snapping onto auxiliary switch or TH 35 standard mounting rail	240 ... 400	--	A	3TX7522-3R 3TX7522-3S 3TX7522-3T 3TX7522-3U 3TX7522-3V	1	1 unit	41B
				400 ... 600	--	B				
				24 ... 48	--	B				
				48 ... 127	--	B				
			127 ... 240	--	B					
			240 ... 400	--	B					
			400 ... 600	--	B					
Surge suppressors · Diodes										
 3TX7462-3.	4 to 12	3TC48, 3TC52, 3TC56	Diode assemblies <sup>3)</sup> (diode and Zener diode) for DC solenoid system, for sticking onto the contactor base or for mounting separately	--	24 ... 250	A	3TX7462-3D	1	1 unit	41B

1) The connection piece for mounting the surge suppressor must be bent slightly.

2) Includes the peak value of the alternating voltage on the DC side.

3) Not for DC economy circuit.

For contactors		Version	Rated control supply voltage $U_s$		DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Type		V AC	V DC						
<b>Terminal covers</b>										
	<b>6</b>	3TC48	for protection against inadvertent contact with exposed busbar connections		M6 B	<b>3TX6506-3B</b>		1	1 unit	41B
	<b>8 and 12</b>	3TC52, 3TC56	Can be screwed on free screw end. Covers one busbar connection (1 set = 6 units).		M10 B	<b>3TX6546-3B</b>		1	1 unit	41B

3TX6526-3B

### ***Spare parts***


For contactors		Version		DT	Screw terminals		PU (UNIT, SET, M)	PS*	PG
Size	Type	Auxiliary contacts			Article No.	Price per PU			
		NO	NC						
Auxiliary switch blocks									
for lateral mounting		Left		Right					
2 and 4	3TC44, 3TC48	Auxiliary switch block (replacement for 3TY6501-1A/-1B)			▶ 3TY6501-1AA00		1	1 unit	41B
		1	1						
8 and 12	3TC52, 3TC56	Auxiliary switch block, left			▶ 3TY6561-1A		1	1 unit	41B
		1	1						
		Auxiliary switch block, right			▶ 3TY6561-1B		1	1 unit	41B
		1	1						
For contactors		Version		DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Size	Type								
Contacts with fixing parts									
		In order to ensure reliable operation of the contactors, only <b>original replacement contacts</b> should be used.							
2	3TC44	(1 set = 2 moving and 4 fixed switching elements)		B	3TY2440-0A		1	1 unit	41B
4	3TC48			B	3TY2480-0A		1	1 unit	41B
8	3TC52			B	3TY2520-0A		1	1 unit	41B
12	3TC56			C	3TY2560-0A		1	1 unit	41B
Arc chutes									
2	3TC44	Arc chutes, 2-pole		C	3TY2442-0A		1	1 unit	41B
4	3TC48			C	3TY2482-0A		1	1 unit	41B
8	3TC52			C	3TY2522-0A		1	1 unit	41B
12	3TC56			C	3TY2562-0A		1	1 unit	41B
Solenoid coils									
DC operation <sup>1)</sup>									
2	3TC44				3TY6443-0B..				
4	3TC48				3TY6483-0B..				
8	3TC52				3TY6523-0B..				
12	3TC56				3TY6563-0B..				
AC operation <sup>1)</sup>									
2	3TC44				3TY7403-0A..				
4	3TC48				3TY6483-0A..				
8	3TC52				3TY6523-0A..				
12	3TC56				3TY6566-0A..				

1) Rated control supply voltages, [see table, page 4/67](#).  
The 10th and 11th digits of the Article No. must be supplemented accordingly.

## Contactors for Special Applications

### Contactors for Switching DC Voltage

#### 3TC contactors, 1- and 2-pole, 32 ... 400 A

For contactors	Version	DT	<b>Screw terminals</b> 	PU (UNIT, SET, M)	PS*	PG
Type			Article No.	Price per PU		
<b>Auxiliary switch blocks</b>						
3TC74	4 NO + 4 NC	B	<b>3TY2741-2J</b>	1	1 unit	41B
3TC78	Auxiliary switch block left with 2 NO + 2 NC	▶	<b>3TY2781-2C</b>	1	1 unit	41B
	Auxiliary switch block right with 2 NO + 2 NC	C	<b>3TY2781-2D</b>	1	1 unit	41B

For contactors	Version	Rated control supply voltage $U_s$	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
Type	V AC/DC							
sors · Varistors								
3TC7	for sticking onto the contactor base	24	C	3TX2746-2F		1	1 unit	41B
		110	C	3TX2746-2G		1	1 unit	41B
fixing parts								
3TC7	Main contacts (1 set)	--	C	3TY2740-0E		1	1 unit	41B
	for 3TC78: 2 units required per contactor							
3TC7	for 3TC78: 2 units required per contactor	--	C	3TY2742-0C		1	1 unit	41B

## Overview

## Version

The 3TG10 power relays/miniature contactors with 4 main contacts are available with screw terminals or 6.3 mm x 0.8 mm flat connectors. The versions with screw terminals are suitable for use in any climate and finger-safe according to EN 50274.

The 3TG10 miniature contactors are characterized by their width of only 36 mm.

## Surge suppression

The 3TG10 power relays/miniature contactors have an integrated protective circuit against opening surges.

## Application

Because they are hum-free they are suitable for use in household appliances and distribution boards in office and residential areas. They can also be used for applications where there is little space such as air conditioners, heating systems, pumps and fans, i.e. for simple electrical controls.

## Standards

IEC 60947-1, IEC 60947-4-1, IEC 60947-5-1

## Overload and short-circuit protection


The 3UA7 overload relay can be used for overload protection. This applies to mounting onto contactors and to stand-alone installation.

## Technical specifications

Type

Dimensions (W x H x D)

- with 3UA7 overload relay mounted below



**3TG10**

36 x 56 x 56

45 x 100 x 62

## General technical specifications

## Endurance

- Mechanical
- Electrical
- AC-1 at  $I_e$
- AC-3 at  $I_e$

Operating cycles

3 million

Operating cycles

0.1 million

Operating cycles

0.4 million

**Rated insulation voltage**  $U_i$  (pollution degree 3)

V

400

**Rated impulse withstand voltage**  $U_{imp}$

kV

4

## Protective separation

Between coil and contacts acc. to IEC 60947-1, Appendix N

V

up to 300

## Permissible ambient temperature

- During operation<sup>1)</sup>
- During storage

°C

-25 ... + 55

°C

-50 ... + 80

**Degree of protection** according to IEC 60947-1 and IEC 60529

IP00, drive system IP20

## Short-circuit protection

**Fuse links**, operational class gG:

LV HRC, type 3NA; DIAZED, type 5SB; NEOZED, type 5SE according to IEC 60947-4-1

- Type of coordination "1"
- Type of coordination "2"

A

25

A

10

A

10

**Miniature circuit breakers**, C characteristic

## Control circuit

**Solenoid coil operating range**

0.85 ... 1.1 x  $U_s$

**Power consumption of the solenoid coils** (for cold coil and 1.0 x  $U_s$ )

- AC operation, 45 ... 450 Hz

VA

4.4

- p.f.

- DC operation

W

0.9 (hum-free)

4

## Load rating with AC

**Utilization category AC-1, switching resistive loads**

**Rated operational current**  $I_e$  up to 400 V at 55 °C<sup>1)</sup>

A

20 for screw terminals, 16 for flat connector

**Rated power**  $U_e$  for AC loads with p.f. = 1, 230/220 V

- for screw terminals
- for flat connector

kW

7.5 (13 at 400 V)

kW

6 (10 at 400 V)

Minimum conductor cross-section for load with  $I_e$

mm<sup>2</sup>

2.5

**Utilization categories AC-2 and AC-3**

**Operational current for AC-3 at 400 V rated value**

A

8.4

Rated power for slipring or squirrel-cage motors with 50 and 60 Hz and at 400 V

kW

4

**Utilization category AC-5a** (permissible nominal impedance:  $\geq 0.5 \Omega$ )

**Switching of gas discharge lamps**

Per main current path at 230 V, 50 Hz

Rated power/rated operational current per lamp

- Uncorrected

18 W

0.37 A

43

36 W

0.43 A

37

58 W

0.67 A

24

- DUO switching

18 W

2 x 0.11 A

2 x 81

36 W

2 x 0.21 A

2 x 42

58 W



2 x 0.32 A

2 x 28

<sup>1)</sup> If the three main current paths carry a load of 20 A, the following applies if  $I > 10$  A in the fourth conducting path: Permissible ambient temperature 40 °C.

# Power Relays/Miniature Contactors

## 3TG10 contactors, 4-pole, 4 kW



Type					3TG10
Load rating with AC					
<b>Switching gas discharge lamps with correction or ECG</b>					
Per main current path 230 V, 50 Hz					
Connection	Rated power per lamp	Capacitor capacitance	Rated operational current per lamp	Unit(s)	
• Shunt compensation	L18 W	4.5 µF	0.11 A	Unit(s)	15
	L36 W	4.5 µF	0.21 A	Unit(s)	15
	L58 W	7 µF	0.32 A	Unit(s)	10
• with ECG (single lamp)	L18 W	6.8 µF	0.10 A	Unit(s)	39
	L36 W	6.8 µF	0.18 A	Unit(s)	39
	L58 W	10 µF	0.27 A	Unit(s)	26
• with ECG (two lamps)	L18 W	10 µF	0.18 A	Unit(s)	2 x 26
	L36 W	10 µF	0.35 A	Unit(s)	2 x 26
	L58 W	22 µF	0.52 A	Unit(s)	2 x 12
<b>Utilization category AC-5b, switching incandescent lamps</b>					kW
Per main current path at 230 V, 50 Hz					1.6
Load rating with DC					
<b>Utilization category DC-1, switching resistive loads (<math>L/R \leq 15</math> ms)</b>					
• Rated operational currents $I_e$					
- 1 conducting path	up to 24 V	A			16
	60 V	A			6
	110 V	A			2
	220 V/240 V	A			0.8
- 2 conducting paths in series	up to 24 V	A			16
	60 V	A			16
	110 V	A			6
	220 V/240 V	A			1.6
- 3 conducting paths in series	up to 24 V	A			18
	60 V	A			18
	110 V	A			16
	220 V/240 V	A			6
- 4 conducting paths in series	up to 24 V	A			20
	60 V	A			20
	110 V	A			20
	220 V/240 V	A			20
<b>Utilization category DC-3 and DC-5</b>					
<b>Shunt-wound and series-wound motors (<math>L/R \leq 15</math> ms)</b>					
• Rated operational currents $I_e$					
- 1 conducting path	up to 24 V	A			10
	60 V	A			0.5
	110 V	A			0.15
	220 V/240 V	A			0
- 2 conducting paths in series	up to 24 V	A			16
	60 V	A			5
	110 V	A			0.35
	220 V/240 V	A			0
- 3 conducting paths in series	up to 24 V	A			16
	60 V	A			16
	110 V	A			10
	220 V/240 V	A			1.75
- 4 conducting paths in series	up to 24 V	A			18
	60 V	A			16
	110 V	A			10
	220 V/240 V	A			2
Conductor cross-sections					
					 <b>Screw terminals</b>
Terminal screws					M3
• Finely stranded with end sleeve (DIN 46228 Form A/D/C)	mm <sup>2</sup>				2 x (0.75 ... 2.5)
• Solid	mm <sup>2</sup>				2 x (1 ... 2.5), 1 x 4
Permissible opening tool (screwdriver)					3.0 mm x 0.5 mm (3RA2908-1A) or Pozidriv 2
					 <b>Flat connectors</b>
• Finely stranded 6.3 mm plug-in sleeve acc. to DIN 46245/46247	mm <sup>2</sup>				0.5 ... 1
- 6.3 ... 1	mm <sup>2</sup>				1 ... 2.5
- 6.3 ... 2.5					
Ⓢ and Ⓢ rating (screw terminals)					
<b>Rated insulation voltage</b>	AC	V			600
<b>Uninterrupted current</b>	Open and enclosed	A			20
<b>Maximum horsepower ratings</b> (from Ⓢ and Ⓢ approved values)					Single-phase/Three-phase
Rated power for three-phase motors at 60 Hz	at 115 V	hp			0.5/ --
	200 V	hp			1/ 3
	230 V	hp			1.5/ 3
	460 ... 600 V	hp			0/ 5



## Selection and ordering data




For screw fixing and snap-on mounting onto TH 35 standard mounting rail

Rated data Utilization category				Main contacts		Rated control supply voltage $U_s$	DT	Article No.	Price per PU	PU (UNIT, SET, M)	PS*	PG
AC-1 Switching of resistive loads at 55 °C		AC-2 and AC-3		Version								
Operational current $I_e$ up to 400 V	Power of AC loads at 50 Hz and 400 V	Operational current $I_e$ up to 400 V <sup>1)</sup>	Power of AC loads at 50 Hz and 400 V	NO	NC	V						
A	kW	A	kW									

4-pole · Hum-free · with screw terminals												
Auxiliary contacts 1 NO, Ident. No. <b>10</b>				Auxiliary contacts 1 NC, Ident. No. <b>01E</b>								
												
<b>AC operation, 45 ... 450 Hz</b>												
20	13	8.4	4	4	--	24 AC	B	<b>3TG1010-0AC2</b>		1	1 unit	41H
						110 AC	B	<b>3TG1010-0AG2</b>		1	1 unit	41H
						230 AC	B	<b>3TG1010-0AL2</b>		1	1 unit	41H
				3	1	24 AC	▶	<b>3TG1001-0AC2</b>		1	1 unit	41H
						110 AC	▶	<b>3TG1001-0AG2</b>		1	1 unit	41H
						230 AC	▶	<b>3TG1001-0AL2</b>		1	1 unit	41H
<b>DC operation</b>												
20	13	8.4	4	4	--	24 DC	B	<b>3TG1010-0BB4</b>		1	1 unit	41H
				3	1	24 DC	▶	<b>3TG1001-0BB4</b>		1	1 unit	41H



3TG10...0...



4-pole · Hum-free · with flat connectors 6.3 mm x 0.8 mm												
Auxiliary contacts 1 NO, Ident. No. <b>10</b>				Auxiliary contacts 1 NC, Ident. No. <b>01E</b>								
												
AC operation, 45 ... 450 Hz												
	16	10	8.4	4	4	--	24 AC	B	3TG1010-1AC2	1	1 unit	41H
							110 AC	D	3TG1010-1AG2	1	1 unit	41H
							230 AC	B	3TG1010-1AL2	1	1 unit	41H
					3	1	24 AC	D	3TG1001-1AC2	1	1 unit	41H
							110 AC	D	3TG1001-1AG2	1	1 unit	41H
							230 AC	B	3TG1001-1AL2	1	1 unit	41H
DC operation												
3TG10...-1...	16	10	8.4	4	4	--	24 DC	B	3TG1010-1BB4	1	1 unit	41H
			8.4	4	3	1	24 DC	B	3TG1001-1BB4	1	1 unit	41H



3TG10...1...

1) The rated operational currents apply to each pole.

## Accessories

Max. rated operational currents $I_e$ /AC-1 (at 55 °C) of the contactors			Max. conductor cross-sections		DT	Screw terminals		PU (UNIT, SET, M)	PS*	PG
Type			mm²			Article No.	Price per PU			
Links for paralleling (insulated star jumpers)										
	3-pole, without connection terminals <sup>1)2)</sup>									
	16		--		▶	3RT1916-4BA31		1	1 unit	41B
	3-pole, with connection terminal <sup>1)3)</sup>									
	40		25		▶	3RT1916-4BB31		1	1 unit	41B
3RT1916-4BB31	4-pole, with connection terminal <sup>1)4)</sup>									
	40		25		C	3RT1916-4BB41		1	1 unit	41B



1) The links for paralleling can be reduced by one pole. The rated operational currents apply to each pole.

2) Replacement for 3TX4490-2C.

3) Replacement for 3TX4490-2A.

4) Replacement for 3TX4490-2B.

Power Relays/Miniature Contactors

Notes