

Self-Laminating Vinyl Wire & Cable Markers (B-427)

Feature a clear, non printable area that wraps around wires and cables to serve as an overlamine. Protected print area offers superior resistance to handling, solvents, oil, grease, dirt and water. These markers are designed to adhere to highly curved surfaces, wires and cables.

- **B-427 Self-Laminating Vinyl Material** - Resistant to abrasion, water, oil and solvents. Temp range -40°F to 158°F (-40°C to 70°C), UL recognized.




Figure 32




Figure 42



Fits Printer Models	Diagram	Catalog#	Color	Approx. Wire Gauge*	Max Wire Dia. Inch (mm)	Label Width A Inch (mm)	Label Height B Inch (mm)	Print-On Height C Inch (mm)	Labels / Roll	Sized To Fit	Ribbon in Cartridge
BMP41, 51, 53	Fig. 32	M-11-427	BK on WT	16 - 10 Gauge	0.160 (4.1)	0.500 (12.7)	0.750 (19.1)	0.375 (9.5)	360	CAT-6, 4 pair UTP Copper	R4300
BMP41, 51, 53	Fig. 32	M-136-427	BK on WT	16 - 10 Gauge	0.160 (4.1)	1.000 (25.4)	0.750 (19.1)	0.375 (9.5)	340	CAT-6, 4 pair UTP Copper	R4300
BMP41, 51, 53	Fig. 42	MC-750-427	BK on WT	16 - 10 Gauge	0.270 (6.7)	25 ft (7.6 m)	0.750 (19.1)	0.375 (9.5)	1 roll (cont.)	CAT-6, 4 pair UTP Copper	R4300
BMP41, 51, 53	Fig. 32	M-47-427	BK on WT	12 - 10 Gauge	0.210 (5.3)	1.000 (25.4)	0.500 (12.7)	0.375 (9.5)	360	2 pair Fiber/Coaxial, Single/Multi-Mode	R4300
BMP41, 51, 53	Fig. 32	M-48-427	BK on WT	12 - 10 Gauge	0.210 (5.3)	0.750 (19.1)	1.000 (25.4)	0.375 (9.5)	200	CAT-6, 4 pair UTP Copper, Fiber, Coaxial	R4300
BMP41, 51, 53	Fig. 32	M-49-427	BK on WT	12 - 10 Gauge	0.210 (5.3)	1.000 (25.4)	1.000 (25.4)	0.375 (9.5)	260	2 pair Fiber/Coaxial, Single/Multi-Mode	R4300
BMP41, 51, 53	Fig. 32	M-102-427	BK on WT	10 - 4 Gauge	0.270 (6.7)	0.500 (12.7)	1.250 (31.7)	0.375 (9.5)	200	CAT-6, 4 pair UTP Copper	R4300
BMP41, 51, 53	Fig. 32	M-143-427	BK on WT	10 - 4 Gauge	0.270 (6.7)	1.000 (25.4)	1.250 (31.7)	0.500 (12.7)	200	CAT-6, 4 pair UTP Copper, Fiber, Coaxial	R4300
BMP41, 51, 53	Fig. 32	M-89-427	BK on WT	10 - 4 Gauge	0.320 (8.1)	0.500 (12.7)	1.500 (38.1)	0.500 (12.7)	180	CAT-6, 4 pair UTP Copper	R4300
BMP41, 51, 53	Fig. 32	M-90-427	BK on WT	10 - 4 Gauge	0.320 (8.1)	0.750 (19.1)	1.500 (38.1)	0.500 (12.7)	180	CAT-6, 4 pair UTP Copper	R4300
BMP41, 51, 53	Fig. 32	M-91-427	BK on WT	10 - 4 Gauge	0.320 (8.1)	1.000 (25.4)	1.500 (38.1)	0.500 (12.7)	180	CAT-6, 4 pair UTP Copper, Fiber, Coaxial	R4300
BMP41, 51, 53	Fig. 32	M-51-427	BK on WT	3 Gauge - 2/0	0.530 (13.5)	1.000 (25.4)	2.500 (63.5)	0.750 (19.1)	110	25 pair Copper, 4-12 pair Fiber, Coaxial	R4300
BMP41, 51, 53	Fig. 32	M-53-427	BK on WT	3/0 - 400 kcmil	0.850 (21.6)	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	70	50 pair Copper, 24 pair Fiber, Backbone	R4300
BMP41, 51, 53	Fig. 32	M-91-427-YL	BK on YL	10 - 4 Gauge	0.320 (8.1)	1.000 (25.4)	1.500 (38.1)	0.500 (12.7)	180	CAT-6, 4 pair UTP Copper, Fiber, Coaxial	R4300
BMP41, 51, 53	Fig. 32	M-51-427-YL	BK on YL	3 Gauge - 2/0	0.530 (13.5)	1.000 (25.4)	2.500 (63.5)	0.750 (19.1)	110	25 pair Copper, 4-12 pair Fiber, Coaxial	R4300
BMP41, 51, 53	Fig. 32	M-53-427-YL	BK on YL	3/0 - 400 kcmil	0.850 (21.6)	1.000 (25.4)	4.000 (101.6)	1.000 (25.4)	70	50 pair Copper, 24 pair Fiber, Backbone	R4300

PermaSleeve® PS Wire Marking Sleeves (B-342)

These heat-shrink sleeves are the ultimate in marker durability, permanence and aesthetic appearance. Fast shrink rate saves time and costs during installation. Military / Industrial grade 3:1 shrink ratio. Meets several MIL, SAE and ASTM specs. Available as individual die-cut or continuous cut-to-length tubing.




Figure 44




Figure 58



Fits Printer Models	Diagram	Catalog #	B#	Color	Approx. Wire Gauge*	For Wire Diameters Inch (mm) Min. Max	Supplied Width A Inch (mm)	Supplied Diameter B Inch (mm)	Sleeves/Roll	Ribbon in Cartridge
BMP41, 51, 53	Fig. 44	M-125-075-342	B-342	BK on WT	22-16 Gauge	0.046 - 0.110 (1.2 - 2.8)	0.750 (19.1)	0.235 (5.9)	80	R4300
BMP41, 51, 53	Fig. 58	MC-125-342	B-342	BK on WT	22-16 Gauge	0.046 - 0.110 (1.2 - 2.8)	7 ft (2.1 m)	0.235 (5.9)	1 roll (cont.)	R4300
BMP41, 51, 53	Fig. 44	M-187-075-342	B-342	BK on WT	20-10 Gauge	0.062 - 0.150 (1.6 - 3.8)	0.750 (19.1)	0.335 (8.5)	80	R4300
BMP41, 51, 53	Fig. 58	MC-187-342	B-342	BK on WT	20-10 Gauge	0.062 - 0.150 (1.6 - 3.8)	7 ft (2.1 m)	0.335 (8.5)	1 roll (cont.)	R4300
BMP41, 51, 53	Fig. 44	M-250-075-342	B-342	BK on WT	16-8 Gauge	0.094 - 0.215 (2.4 - 5.5)	0.750 (19.1)	0.439 (11.1)	80	R4300
BMP41, 51, 53	Fig. 58	MC-250-342	B-342	BK on WT	16-8 Gauge	0.094 - 0.215 (2.4 - 5.5)	7 ft (2.1 m)	0.439 (11.1)	1 roll (cont.)	R4300
BMP41, 51, 53	Fig. 44	M-375-075-342	B-342	BK on WT	12-4 Gauge	0.125 - 0.320 (3.2 - 8.1)	0.750 (19.1)	0.645 (16.4)	80	R4300
BMP41, 51, 53	Fig. 58	MC-1-375-342	B-342	BK on WT	12-4 Gauge	0.125 - 0.320 (3.2 - 8.1)	7 ft (2.1 m)	0.645 (16.4)	1 roll (cont.)	R4300
BMP41, 51, 53	Fig. 58	MC-125-342-YL	B-342	BK on YL	22-16 Gauge	0.046 - 0.110 (1.2 - 2.8)	7 ft (2.1 m)	0.235 (5.9)	1 roll (cont.)	R4300
BMP41, 51, 53	Fig. 58	MC-187-342-YL	B-342	BK on YL	20-10 Gauge	0.062 - 0.150 (1.6 - 3.8)	7 ft (2.1 m)	0.335 (8.5)	1 roll (cont.)	R4300
BMP41, 51, 53	Fig. 58	MC-250-342-YL	B-342	BK on YL	16-8 Gauge	0.094 - 0.215 (2.4 - 5.5)	7 ft (2.1 m)	0.439 (11.1)	1 roll (cont.)	R4300

Nylon Cloth Cable Flags (B-499)

Pre-formatted with two printable areas, allowing label to be easily folded around wires to create a two-sided, printed flag.

- **B-499 Nylon Cloth Material** - Permanent adhesive. Pliable for rough or smooth surfaces. Temp. Range: -94°F to 194°F (-70°C to 90°C). UL recognized.





Figure 63



Fits Printer Models	Diagram	Catalog #	B#	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Non-Print Area Inch (mm)	Labels/ Roll	Ribbon in Cartridge
BMP41, 51, 53	Fig. 63	M-141-499	B-499	Nylon Cloth	BK on WT	1.000 (25.4)	1.000 (25.4)	0.250 (6.3)	90	R4300

Self-Laminating Vinyl Wire & Cable Markers (B-427)

Feature a clear, non printable area that wraps around wires and cables to serve as an overlamine. Protected print area offers superior resistance to handling, solvents, oil, grease, dirt and water. These markers are designed to adhere to the highly curved surfaces of wires and cables.

• B-427 Self-Laminating Vinyl

Material - Resistant to abrasion, water, oil and solvents. Temp. range -40°F to 158°F (-40°C to 70°C), UL recognized.




Figure 42





Figure 42a
(continuous)

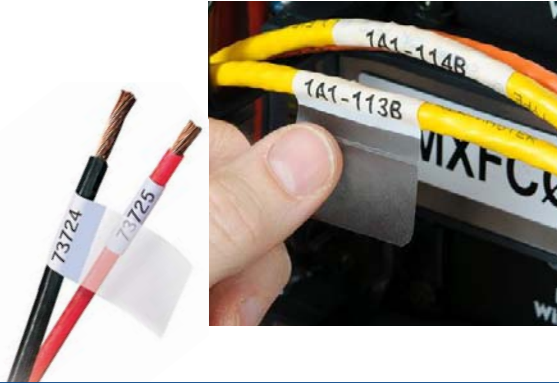

Fits Printer Model	Diagram	Catalog #	B#	Material	Color	Approx. Wire Gauge	Max. Wire Diameter	Label Width A Inch (mm)	Label Height B Inch (mm)	Print-On Height C Inch (mm)	Labels/ Roll	Ribbon in Cartridge
B-427 – Self-Laminating Vinyl												
BMP41, 51, 53	Fig. 42	M-11-427	B-427	Vinyl	BK on WT	16 - 10	0.160" (4.06 mm)	0.500 (12.70)	0.750 (19.05)	0.375 (9.53)	360	R4300
BMP41, 51, 53	Fig. 42	M-136-427	B-427	Vinyl	BK on WT	16 - 10	0.160" (4.06 mm)	1.000 (25.40)	0.750 (19.05)	0.375 (9.53)	340	R4300
BMP41, 51, 53	Fig. 42	M-47-427	B-427	Vinyl	BK on WT	12 - 10	0.210" (5.33 mm)	0.500 (12.70)	1.000 (25.40)	0.375 (9.53)	360	R4300
BMP41, 51, 53	Fig. 42	M-48-427	B-427	Vinyl	BK on WT	12 - 10	0.210" (5.33 mm)	0.750 (19.05)	1.000 (25.40)	0.375 (9.53)	200	R4300
BMP41, 51, 53	Fig. 42	M-49-427	B-427	Vinyl	BK on WT	12 - 10	0.210" (5.33 mm)	1.000 (25.40)	1.000 (25.40)	0.375 (9.53)	260	R4300
BMP41, 51, 53	Fig. 42	M-102-427	B-427	Vinyl	BK on WT	10 - 4	0.270" (6.86 mm)	0.500 (12.70)	1.250 (31.75)	0.375 (9.53)	200	R4300
BMP41, 51, 53	Fig. 42	M-143-427	B-427	Vinyl	BK on WT	10 - 4	0.270" (6.86 mm)	1.000 (25.40)	1.250 (31.75)	0.500 (12.70)	200	R4300
BMP51, 53	Fig. 42	M-115-427	B-427	Vinyl	BK on WT	10 - 4	0.270" (6.86 mm)	1.500 (38.10)	1.250 (31.75)	0.500 (12.70)	200	R4300
BMP41, 51, 53	Fig. 42	M-89-427	B-427	Vinyl	BK on WT	10 - 4	0.320" (8.13 mm)	0.500 (12.70)	1.500 (38.10)	0.500 (12.70)	360	R4300
BMP41, 51, 53	Fig. 42	M-90-427	B-427	Vinyl	BK on WT	10 - 4	0.320" (8.13 mm)	0.750 (19.05)	1.500 (38.10)	0.500 (12.70)	200	R4300
BMP41, 51, 53	Fig. 42	M-91-427	B-427	Vinyl	BK on WT	10 - 4	0.320" (8.13 mm)	1.000 (25.40)	1.500 (38.10)	0.500 (12.70)	200	R4300
BMP41, 51, 53	Fig. 42	M-91-427-YL	B-427	Vinyl	BK on YL	10 - 4	0.320" (8.13 mm)	1.000 (25.40)	1.500 (38.10)	0.500 (12.70)	200	R4300
BMP51, 53	Fig. 42	M-32-427	B-427	Vinyl	BK on WT	10 - 4	0.320" (8.13 mm)	1.500 (38.10)	1.500 (38.10)	0.500 (12.70)	180	R4300
BMP41, 51, 53	Fig. 42	M-51-427	B-427	Vinyl	BK on WT	3 - 2/0	0.530" (13.46 mm)	1.000 (25.40)	2.500 (63.50)	0.750 (19.05)	80	R4300
BMP41, 51, 53	Fig. 42	M-51-427-YL	B-427	Vinyl	BK on YL	3 - 2/0	0.530" (13.46 mm)	1.000 (25.40)	2.500 (63.50)	0.750 (19.05)	80	R4300
BMP51, 53	Fig. 42	M-116-427	B-427	Vinyl	BK on WT	3 - 2/0	0.530" (13.46 mm)	1.500 (38.10)	2.500 (63.50)	0.750 (19.05)	80	R4300
BMP41, 51, 53	Fig. 42	M-53-427	B-427	Vinyl	BK on WT	3/0-400 kcmil	0.850" (21.59 mm)	1.000 (25.40)	4.000 (101.6)	1.000 (25.40)	70	R4300
BMP41, 51, 53	Fig. 42	M-53-427-YL	B-427	Vinyl	BK on YL	3/0-400 kcmil	0.850" (21.59 mm)	1.000 (25.40)	4.000 (101.6)	1.000 (25.40)	70	R4300
BMP51, 53	Fig. 42	M-33-427	B-427	Vinyl	BK on WT	3/0-400 kcmil	0.850" (21.59 mm)	1.500 (38.10)	4.000 (101.6)	1.000 (25.40)	70	R4300
BMP51, 53	Fig. 42	M-34-427	B-427	Vinyl	BK on WT	3/0-400 kcmil	1.300" (33.02 mm)	1.500 (38.10)	6.000 (152.40)	1.500 (38.10)	40	R4300
B-427 – Continuous Self-Laminating Vinyl												
BMP41, 51, 53	Fig. 42a	MC-750-427	B-427	Vinyl	BK on WT	16 - 10	0.270" (6.86 mm)	25 ft. (7.62 m)	0.750 (19.05)	0.375 (9.53)	1 roll (cont.)	R4300
BMP51, 53	Fig. 42a	MC-1000-427	B-427	Vinyl	BK on WT	12 - 10	0.850" (21.59 mm)	25 ft. (7.62 m)	1.000 (25.40)	0.375 (9.53)	1 roll (cont.)	R4300
BMP51, 53	Fig. 42a	MC-1250-427	B-427	Vinyl	BK on WT	10 - 4	0.530" (13.46 mm)	25 ft. (7.62 m)	1.250 (31.75)	0.500 (12.70)	1 roll (cont.)	R4300
BMP51, 53	Fig. 42a	MC-1500-427	B-427	Vinyl	BK on WT	10 - 4	0.270" (6.86 mm)	25 ft. (7.62 m)	1.500 (38.10)	0.500 (12.70)	1 roll (cont.)	R4300

* Approximate wire gauge based on AWG for THHN wire.

Vinyl Cloth Adhesive Wire & Cable Labels (B-498)

Printer automatically repeats your text to fill the label for maximum readability when label is wrapped around wire.

- **B-498 Repositionable Vinyl Cloth** - Durable material's special adhesive stays put, but marker can be removed and reapplied if necessary. Temp. range -40°F to 175°F (-40°C to 70°C). UL Recognized.




Figure 29



Fits Printer Model	Diagram	Catalog #	B#	Material	Color	Approx. Wire Gauge	Max. Wire Diameter	Label Width A Inch (mm)	Label Height B Inch (mm)	Labels/ Roll	Ribbon in Cartridge
B-498 – Vinyl Cloth											
BMP41, 51, 53	Fig. 29	M-7-498	B-498	Vinyl Cloth	BK on WT	22 - 16 Gauge	0.110" (2.80 mm)	0.500 (12.70)	0.500 (12.70)	240	R6200
BMP41, 51, 53	Fig. 29	M-11-498	B-498	Vinyl Cloth	BK on WT	16 - 10 Gauge	0.160" (4.00 mm)	0.750 (19.05)	0.500 (12.70)	220	R6200
BMP41, 51, 53	Fig. 29	M-131-498	B-498	Vinyl Cloth	BK on WT	12 - 10 Gauge	0.210" (5.00 mm)	0.500 (12.70)	1.000 (25.40)	180	R6200
BMP41, 51, 53	Fig. 29	M-48-498	B-498	Vinyl Cloth	BK on WT	12 - 10 Gauge	0.210" (5.00 mm)	0.750 (19.05)	1.000 (25.40)	180	R6200
BMP41, 51, 53	Fig. 29	M-49-498	B-498	Vinyl Cloth	BK on WT	12 - 10 Gauge	0.210" (5.00 mm)	1.000 (25.40)	1.000 (25.40)	160	R6200
BMP41, 51, 53	Fig. 29	M-91-498	B-498	Vinyl Cloth	BK on WT	10 - 4 Gauge	0.270" (7.00 mm)	1.000 (25.40)	1.500 (38.10)	160	R6200
BMP51, 53	Fig. 29	M-128-498	B-498	Vinyl Cloth	BK on WT	10 - 4 Gauge	0.270" (7.00 mm)	1.000 (25.40)	1.900 (48.3)	100	R6200

* Approximate wire gauge based on AWG for THHN wire.