

15800

Specifications

Description: Fused disconnect switch for use only with the following fuses;
Main: Telepower TPS 1 to 70 Amp.

Alarm: Bussmann series GMT-A only (page 13-13).
Recommend GMT-X Cover (page 13-13).

Dimensions: See dimensions illustration.

Ratings:

Volts: — 60Vdc

Amps: — 3-70A

SCCR: — 100kA

Agency information: CE, UL Recognized, Guide QPQY2, File E97649.

Flammability rating: UL 94V0, 150°C.

Features and benefits

- Alarm output with wire wrap terminal or connection to 0.063" thick common alarm bus
- Spare alarm and power fuse compartment
- Mounting hardware included


Typical applications:

- Telecommunications DC power circuit protection

Catalog numbers

Catalog numbers	Access panel mounting
15800-R-200	Rear
15800-F-200	Front

Dimensions - in (mm)

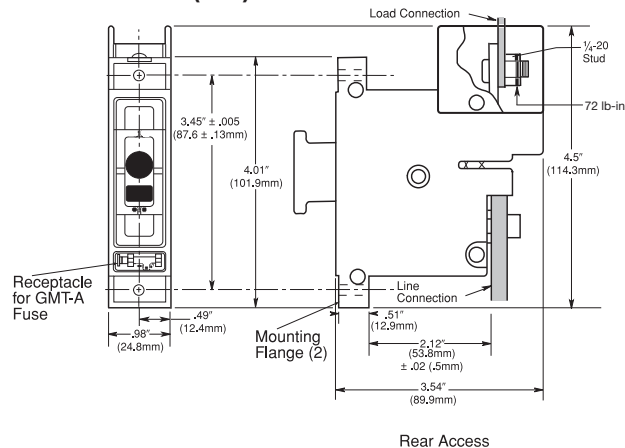

Accessories

- Spare fuse holders: catalog numbers TPSFH-AS (TPS fuses) and TPSFH-T (GMT fuses).

Data Sheet: 5002

TPS

Specifications

Description: DC power distribution non-indicating fuses specifically designed to meet the unique needs of DC power distribution systems. For use with Bussmann series fused disconnect switch 15800.

Dimensions: See dimensions illustration.

Ratings:

Volts: — 170Vdc

Amps: — 1-70A

IR: — 100kA

Agency information: CE, UL Recognized, Guide JFHR2, File E56412, RoHS compliant.

Features and benefits

- The UL Recognized ratings and current-limiting capability make this fuse ideal for cable protection on existing DC power distribution systems
- A unique blue label is used on all Telepower fuses to designate their DC capability
- Printed circuit board variations available

Typical applications


- Telecommunications DC power circuit protection
- Applications requiring printed circuit board mounting

Catalog numbers (amps)

TPS-1	TPS-6L	TPS-30	TPS-50V
TPS-1L	TPS-10	TPS-30L	TPS-60
TPS-2	TPS-10L	TPS-35	TPS-60L
TPS-2L	TPS-15	TPS-35L	TPS-70
TPS-3	TPS-15L	TPS-40	TPS-70L
TPS-3L	TPS-20	TPS-40L	TPS-70LB
TPS-5	TPS-20L	TPS-40V	
TPS-5L	TPS-25	TPS-50	
TPS-6	TPS-25L	TPS-50L	

Suffix: L = PCB tab V = Vertical PCB tab LB = Bolt tag

Dimensions - in (mm)



Accessories

- Spare fuse holder: TPSFH-AS, see page 15-6.

Data Sheet: 5009



RoHS