

LED



createchange



FEATURES

- Matches WC (fluorescent) in appearance
- Excellent efficacy with up to 131 lumens per watt
- Long-life 60,000 hour LEDs at L80 for reduced maintenance
- Four LED color choices
- 2' Size offers four lumen packages
- 4' Size offers seven lumen packages
- Superior color consistency within a 3-step MacAdam ellipse and greater than 80 CRI
- Heavy gauge steel housing, die embossed for maximum rigidity
- Injection molded ends sonically welded to prismatic lens extrusion
- Clear prismatic diffuser with overlay features flat bottom and vertical sides
- LED boards and driver accessible for future maintenance or upgrades; modular replaceability
- Surface mount or stem mount
- QR code traceability
- DesignLights Consortium® (DLC) qualified; see www.designlights.org
- Five year warranty (Terms and Conditions apply)

ORDERING INFORMATION

MODEL	SIZE	COLOR TEMP	LUMEN OUTPUT	DRIVER	VOLTAGE	OPTIONS
LWC						
LWC LED Premium Specification Grade Wraparound	2 2' 4 4'	30 3000K 35 3500K 40 4000K 50 5000K	XW Extra Low Watt VW Very Low Watt MW Medium Low Watt LW Low Watt ML Medium Lumen HL High Lumen VL Very High Lumen	E Fixed Output ESD Step Dimming ED 0-10V Dimming LUTH Hi-lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology LUT5 5-Series EcoSystem LED driver	U 120V-277V 347 347 (E,ED,ED1 only)	ELL14 Emergency Battery Pack, 1400 Lumens ^{1,2} GLR Fast Blow Fuse PAF Paint After Fabrication DR 50% DR Content, Clear Prismatic Acrylic NYC NYC Compliant


See Product Availability Table below.

ACCESSORIES (ORDER SEPARATELY)

- ITB4 T-Bar Hanger
- S18 18" Stem, Canopy
- SS18 18" Swivel Stem—45° Swivel, Canopy

¹ For compatibility with Dual-Lite LiteGear® inverters in lieu of installed Battery Pack, contact Hubbell Lighting Representative.

² Battery not compatible with 2' fixture.

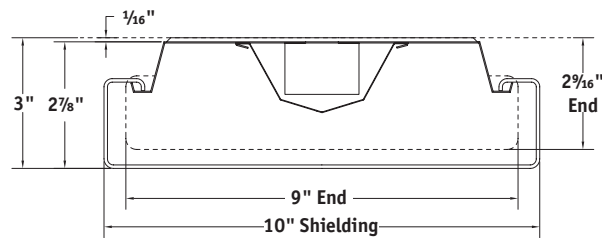

PRODUCT AVAILABILITY

SIZE	LUMEN PACKAGE	NOMINAL LUMENS (4000K)	NOMINAL WATTS	EFFICACY
2'	LW	2,599	24	108
	ML	3,278	28	117
	HL	3,715	32	116
	VL	4,545	41	111
4'	XW	2,396	19	127
	VW	3,347	27	125
	MW	3,792	31	124
	LW	4,423	37	120
	ML	5,018	43	118
	HL	5,732	51	113
	VL	7,065	58	121

Lumens vary according to color temperatures and other factors. See specific photometric test(s).

FEATURES

- Clear acrylic prismatic diffuser with flat bottom and vertical sides
- Two, three, or four-lamp cross sections
- Hinges from either side
- White steel end plates with flush knockouts for continuous row mounting
- Heavy gauge steel housing die embossed for maximum rigidity
- Heat sink embossments and levelling projections allow direct mounting of HPF fixtures on combustible low density cellulose fiberboard ceilings
- All metal parts are treated with a five stage phosphate bonding process and finished with a baked white enamel
- UL listed 1598, cUL or CSA. Damp Location standard



ORDERING INFORMATION

MODEL	SIZE	NO. OF LAMPS IN CROSS SECTION	LAMP TYPE	BALLAST	VOLTAGE	OPTIONS
AWN 8 5/16" Wide	2 2' (AWN only)	2 Two	17 2', T8: 17 Watt	NOTE: See Technical Section for other ballast options. E Electronic Instant Start (Std.) 3E 3-Lamp Electronic T8, Instant Start 4E 4-Lamp Electronic T8, Instant Start 24E (1) 2-Lamp and (1) 4-Lamp Electronic T8, Instant Start EP Electronic T5 or T8, Programmed Start 3EP 3-Lamp Electronic T5HO or T8, Programmed Start 4EP 4-Lamp Electronic T5HO (N/A 347V) or T8, Programmed Start	U 120V-277V 347 347V	EL Emergency Battery Pack GLR Fast Blow Fuse PAF Paint After Fabrication SB3 Stem Mounting Bracket (Required for 3-Lamp units only) NYC NYC Compliant For more options see pages 96-112.
AWW 14 5/8" Wide	4 4'	3 Three	28 4', T5: 28 Watt			
	8 8'	4 Four	32 4', T8: 32, 30, 28 or 25 Watt			
		See Product Availability table below.	54 4', T5HO: 54 Watt			

ACCESSORIES (ORDER SEPARATELY)

- S18 18" Stem w/Canopy
- SS18 18" 45° Swivel Stem w/Canopy

PRODUCT AVAILABILITY

SERIES	No. of lamps in cross section	No. Of lamps in fixture	Lamp Type	Lamp length	WIDTH	LENGTH	HEIGHT
AWN2	2	2	17	2'	8 5/16"	2'	2 7/8"
AWN4	2	2	28, 32, 54	4'	8 5/16"	4'	2 7/8"
AWN8	2	4	28, 32, 54	4'	8 5/16"	8'	2 7/8"
AWW4	2	2	28, 32, 54	4'	14 5/8"	4'	2 25/32"
	3	3	28, 32, 54	4'	14 5/8"	4'	2 25/32"
	4	4	28, 32, 54	4'	14 5/8"	4'	2 25/32"
AWW8	2	4	28, 32, 54	4'	14 5/8"	8'	2 25/32"
	3	6	28, 32, 54	4'	14 5/8"	8'	2 25/32"
	4	8	28, 32, 54	4'	14 5/8"	8'	2 25/32"

