TYPE:
CATALOG #:
NOTES:









Features

- Rugged off-white thermoplastic construction
- Even illumination for excellent legibility
- Snap-together design for quick and easy installation
- Universal mounting, complete with 2 faces, backplate, and canopy
- Replaceable knockout directional chevrons
- Energy efficient, long-life red or green LEDs
- UL924 Listed
- Damp location listing is standard on all models
- 3-year limited warranty
 Detailed warranty terms located at: www.emergi-lite.com/usa/files/EL_Warranty.pdf

ELX Series Models

AC-only exit signs, red or green Self-powered exit signs, red or green

Self-Powered Emergency Models


- Replaceable, sealed Nickel-Cadmium battery
- Provides a minimum 90 minutes of continuous emergency illumination
- Energy star compliant
- Batteries recharge per UL924 specifications
- Consumes less than 3W
- Optional: Advanced Diagnostic

Charger

- 120/277VAC input
- Fully automatic
- Temperature compensated
- Brownout protection
- Short circuit protected
- Low voltage battery disconnect
- Push to test switch
- AC pilot light

Dimensions Dimensions are approximately

Dimensions are approximate and subject to change.

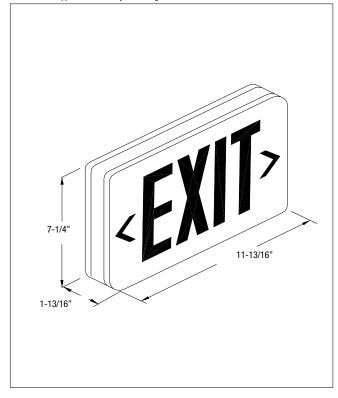

Accessories (order as a separate item)

DESCRIPTION	SUFFIX
Wire Guard - Wall Mount	WG1-E
Ceiling or end mount	WG5-E

Power Consumption

	DESCRIPTION
120/277VAC, 60Hz maximum 2.5W	

How to Order

SERIES	LEGEND COLOR	OPTION
ELXN400= AC-only ELXN400= Self-Powered	RN= Red GN= Green	-AD= Advanced Diagnostic*
		*Available only with Self-Powered model, no remote capacity

Example: ELXN400RN



