


## Starfire® Strobe Warning Light (131ST/131DST)

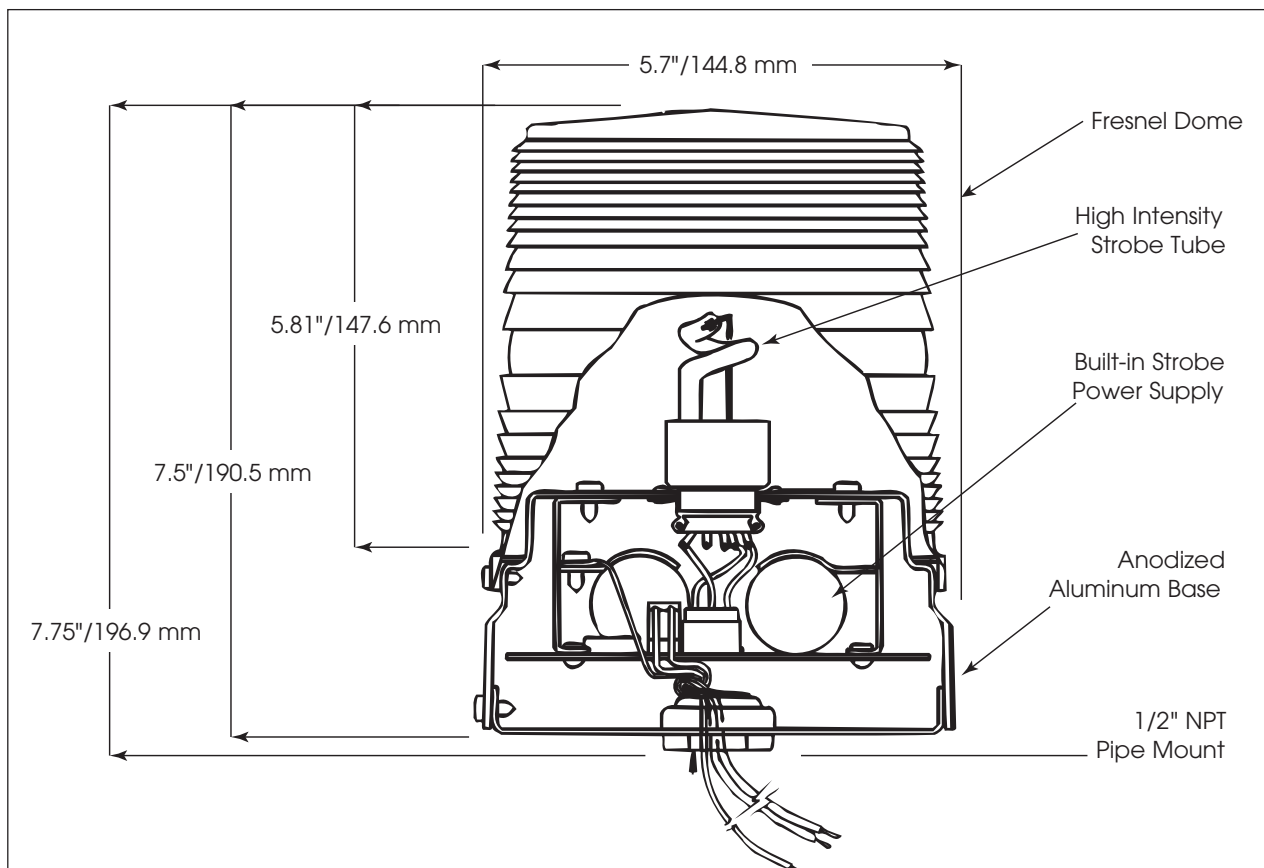

## SPECIFICATIONS

|                        |                |               |
|------------------------|----------------|---------------|
| Lamp Life:             | 10,000 Hours   |               |
| Light Source:          | Strobe tube    |               |
| Operating Temperature: | -31°F to 150°F | -35°C to 66°C |
| Net Weight:            | 2.0 lbs        | 1.0 kg        |
| Shipping Weight:       | 3.4 lbs        | 1.5 kg        |
| Height:                | 7.75"          | 196.9 mm      |
| Width:                 | 5.7"           | 144.8 mm      |

## REPLACEMENT PARTS

| Description              | Part Number   |
|--------------------------|---------------|
| Dome, Amber <sup>1</sup> | K8422B428A-01 |
| Dome, Blue <sup>1</sup>  | K8422B428A-02 |
| Dome, Clear <sup>1</sup> | K8422B428A    |
| Dome, Green <sup>1</sup> | K8422B428A-03 |
| Dome, Red <sup>1</sup>   | K8422B428A-04 |
| Strobe Tube              | K8107178A     |
| Surface Mount Kit        | K8444A211B    |

<sup>1</sup> Includes dome gasket

## HOW TO ORDER

|                            |   |                           |                |
|----------------------------|---|---------------------------|----------------|
| <b>131ST</b>               | - | <b>120</b>                | <b>A</b>       |
| <b>TYPE</b>                |   | <b>VOLTAGE</b>            | <b>COLOR</b>   |
| <b>131ST</b> Single Flash  |   | <b>012-024</b> (12-24VDC) | <b>A</b> Amber |
| <b>131DST</b> Double Flash |   | <b>120</b> (120VAC)       | <b>B</b> Blue  |
|                            |   | <b>240</b> (240VAC)       | <b>C</b> Clear |
|                            |   |                           | <b>G</b> Green |
|                            |   |                           | <b>R</b> Red   |


## OPTIONAL ACCESSORIES

| Description    | Part Number |
|----------------|-------------|
| Corner Bracket | LCMB2*      |
| Wall Bracket   | LWMB2*      |
| Surface Mount  | K8444A211B  |

\* Rated for NEMA 3R installations

Corner and Wall Brackets shown on pages 128-129

## Commander® Strobe Light (371DST)

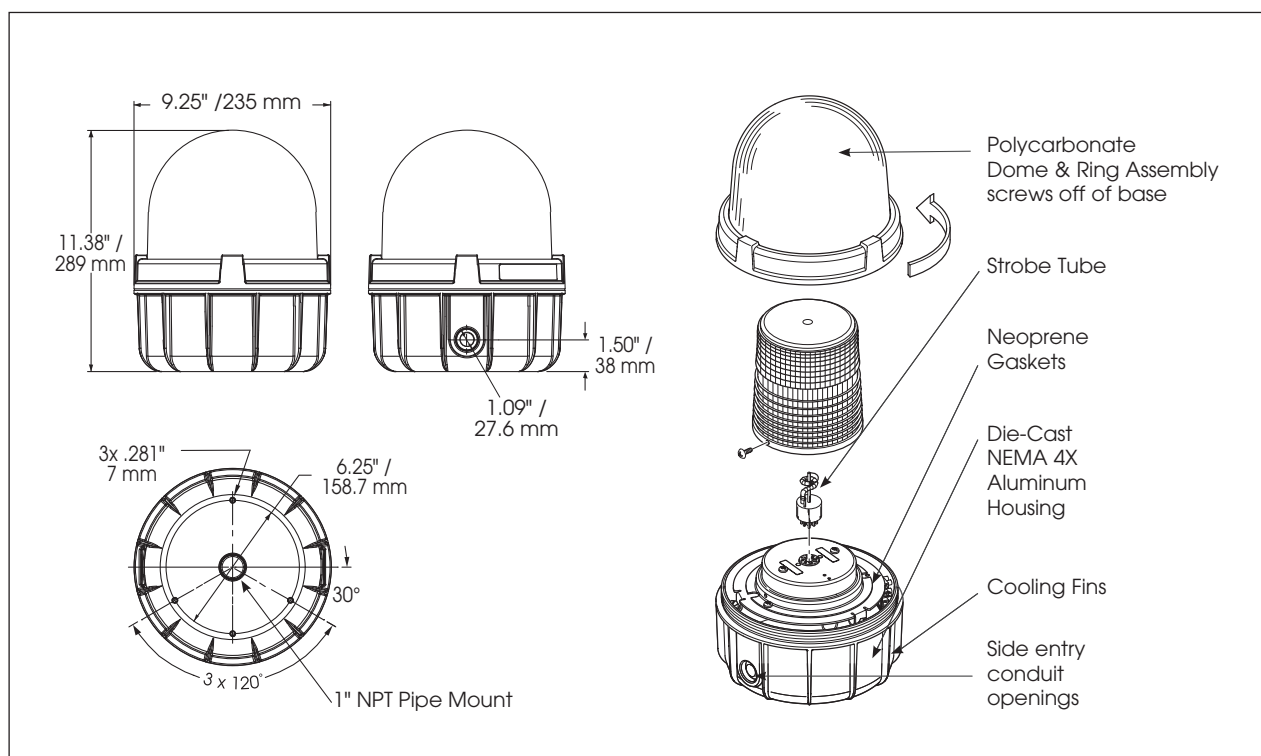

## SPECIFICATIONS

|                        |                |               |
|------------------------|----------------|---------------|
| Lamp Life:             | 10,000 Hours   |               |
| Light Source:          | Strobe Tube    |               |
| Operating Temperature: | -31°F to 104°F | -35°C to 40°C |
| Net Weight:            | 6.23 lbs       | 2.83 kg       |
| Ship. Weight:          | 8.3 lbs        | 3.76 kg       |
| Height:                | 11.38"         | 288.9 mm      |
| Diameter:              | 9.25"          | 235 mm        |

## REPLACEMENT PARTS

| Description                            | Part Number  |
|----------------------------------------|--------------|
| <b>Series B Dome and Ring Assembly</b> |              |
| Amber Polycarbonate                    | K8459125A    |
| Blue Polycarbonate                     | K8459125A-01 |
| Clear Polycarbonate                    | K8459125A-02 |
| Green Polycarbonate                    | K8459125A-03 |
| Red Polycarbonate                      | K8459125A-04 |
| Clear, Inner Polycarbonate, Lens       | K8422B428A   |
| PCB Assembly 12-24VDC                  | K2001265D-01 |
| PCB Assembly 120VAC                    | K200865G-02  |
| Strobe Tube                            | K8107178A    |
| Gasket, Surface Mount                  | K8459127A    |

## HOW TO ORDER

|                       |                                                                                      |                                                                  |
|-----------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------|
| <b>371DST</b>         | <b>- 120</b>                                                                         | <b>A</b>                                                         |
| <b>TYPE</b><br>371DST | <b>VOLTAGE</b><br>012-024 (12-24VDC)<br>120 (120VAC 50/60Hz)<br>240 (240VAC 50/60Hz) | <b>COLOR</b><br>A Amber<br>B Blue<br>C Clear<br>G Green<br>R Red |

## OPTIONAL ACCESSORIES

| Description                         | Part Number |
|-------------------------------------|-------------|
| Solid Surface Mounting Bracket      | 371BRCKT    |
| Shock Mount Kit                     | K8459A076C  |
| 3/4" Hub Kit                        | K8459138A   |
| 1" Plug Kit                         | K8459130A   |
| Hazardous Location Mounting Bracket | LHWB*       |

\* Mounting Brackets shown on pages 130-131