Hoffman®

ELECTRIC HEATERS







115/230 Volt 400/800 Watt



115/230 Volt 1300 Watt

INDUSTRY STANDARDS

UL 508A Component Recognized; File No. E61997

CSA Certified, CSA File No. LR42186 CE

APPLICATION

Protect mechanical, electrical and electronic equipment from low temperatures, condensation and corrosion with this thermostatically controlled, fan-driven heater that maintains a stable enclosure temperature.

Fan draws cool air from the bottom of the enclosure and passes this air across the thermostat and heating element before being released into enclosure cavity. Heated air is discharged through the top of the heater unit.

SPECIFICATIONS

- Aluminum housing
- Thermostat range adjustable from 0 F to 100 F (-18 C to 38 C)
- Four 10-32 x self-tapping screws are included with each heater
- Ball bearing fan
- Terminal strip with clamp connector that accepts both solid and stranded wire

FINISH

· Brushed aluminum



These electric heaters are not designed for use in dusty, dirty, corrosive, or hazardous locations. Portions of the heater can get hot. Adequate protection must be taken to protect people from potential burns, and to protect other components from this heat. Pentair Technical Products recommends this heater only be installed in a totally-enclosed metal enclosure.

DO NOT INSTALL HEATERS ON WOOD PANELS. Heat sensitive components should not be placed near the heater discharge area since this air can be quite warm. The clearance range defines the space that must be kept free of these components for proper and safe operation of the heater.



Performance Data 100 and 200 Watt Heaters

| CATALOG NUMBERS | | | | |
|---------------------------|----------|----------|----------|----------|
| | DAH1001A | DAH1002A | DAH2001A | DAH2002A |
| ELECTRICAL DATA | | | | |
| Rated Voltage | 115 | 230 | 115 | 230 |
| Frequency (Hz) | 50/60 | 50/60 | 50/60 | 50/60 |
| Power Consumption (Watts) | 100 | 100 | 200 | 200 |
| Nominal Current (Amps) | 0.98 | 0.49 | 1.89 | 0.95 |
| HEATING PERFORMANCE | | | | |
| Watts | 100 | 100 | 200 | 200 |
| UNIT CONSTRUCTION | | | | |
| Weight (lb./kg) | 1.6/0.73 | 1.6/0.73 | 1.6/0.73 | 1.6/0.73 |
| X (in./mm) | 4.00/102 | 4.00/102 | 4.00/102 | 4.00/102 |

Performance Data 400 and 800 Watt Heaters


| DAH4001B | DAH4002B | DAH8001B | DAH8002B |
|----------|------------------------------------|---|---|
| | | | |
| 115 | 230 | 115 | 230 |
| 50/60 | 50/60 | 50/60 | 50/60 |
| 400 | 400 | 800 | 800 |
| 3.72 | 1.86 | 7.37 | 3.69 |
| | | | |
| 400 | 400 | 800 | 800 |
| | | | |
| 2.2/1.00 | 2.2/1.00 | 2.2/1.00 | 2.2/1.00 |
| 6.00/152 | 6.00/152 | 8.00/203 | 8.00/203 |
| | 115 50/60 400 3.72 400 | 115 230 50/60 50/60 400 400 3.72 1.86 400 400 2.2/1.00 2.2/1.00 | 115 230 115 50/60 50/60 50/60 400 400 800 3.72 1.86 7.37 400 400 800 2.2/1.00 2.2/1.00 2.2/1.00 |

Performance Data 1300 Watt Heaters

| CATALOG NUMBERS | | |
|---------------------------|-----------|-----------|
| | DAH13001C | DAH13002C |
| ELECTRICAL DATA | | |
| Rated Voltage | 115 | 230 |
| Frequency (Hz) | 50/60 | 50/60 |
| Power Consumption (Watts) | 1300 | 1300 |
| Nominal Current (Amps) | 11.5 | 5.7 |
| HEATING PERFORMANCE | | |
| Watts | 1300 | 1300 |
| UNIT CONSTRUCTION | | |
| Weight (lb./kg) | 3.4/1.54 | 3.4/1.54 |
| X (in./mm) | 8.00/203 | 8.00/203 |



Dimensions and Clearance Range Drawing for DAH1001A, -2A and DAH2001A, -2A

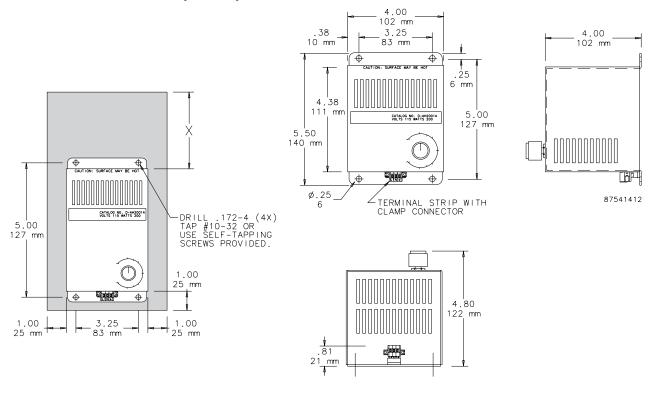

Dimensions and Clearance Range Drawing for DAH4001B, -2B and DAH8001B, -2B

