


**AUTOGUARD® Self Test Technology 1st introduced by Hubbell over 10 years ago!
...self test monitoring now required in 2015 UL 943 GFCI Safety Standard...**

Hubbell Self Test GFCI Patented Technology

Hubbell AUTOGUARD® GFCI receptacles continually test and monitor for “people protection capability” automatically. This patented safety feature includes disconnecting power to the receptacle if critical components are damaged and GFCI protection is lost. GFCI auto-monitoring is conducted continuously within every 30 seconds.

Also, clear visual indicators are provided on the device face representing power status, trip condition, ground fault condition and end of life status. In addition, for added safety, power will be denied to the receptacle face if reverse wiring of line and load was to occur.



Hubbell Self Test Patented Technology

UL (Underwriters Laboratory) now requires all manufacturers to provide self test monitoring capability effective June 29, 2015. When was the last time you tested a GFCI receptacle? Industry studies indicate only a very small number of installations are actually being tested as is recommended by the manufacturer and UL. This is the fundamental reason this new revision has been incorporated into UL 943 standard for 2015.

Each GFR must automatically monitor GFCI functionality periodically	If the unit can no longer provide GFCI protection, it must comply with the following	Reverse line and load miswire function – (repeated)
Automatically test within (5) seconds of power to line and load terminals; periodically means every (3) hours or less.	Deny Power (trip with the inability to reset); if unit does reset it is subject to the next auto-monitoring test cycle. Visual and/or audible indication that it no longer can provide protection.	If the line conductor is wired to the load terminal, power to the receptacle face will be denied. This includes both the initial installation and any subsequent reinstallations.

Features


- **Patented AUTOGUARD® Technology** — Continuous Self Test functionality and disconnects power to receptacle if critical components are damaged and GFCI protection is lost
- **Federal Communications Commission Part 15** — Compliant for radiated and conducted emissions
- **Thermoplastic Nylon Housing** — High Impact and Ultraviolet Resistant construction provides resilience in harsh environments
- **Clear Visual Indication of GFR Status** — LED Indicating Lights:
Green LED (power to the device)
Red LED (trip condition/ground fault condition)
Flashing Red LED (end of life)
- **Internal Back Wiring Clamp and Guide Pocket** — Quick and dependable termination
- **Protection Against Line and Load Reversal** — No power to the face or downstream receptacles if device is miswired
- **Installation Ease, Lower Labor Cost** — With auto-grounding clip, captive mounting screws and single tab “breakoff” ears and full “breakoff” for OEM raised covers
- **Night Light Option** — Light sensor controls for automatic “ON/OFF” and custom dual lens for optimum light output







Commercial Standard Hospital Grade • GFCI Receptacles


Features

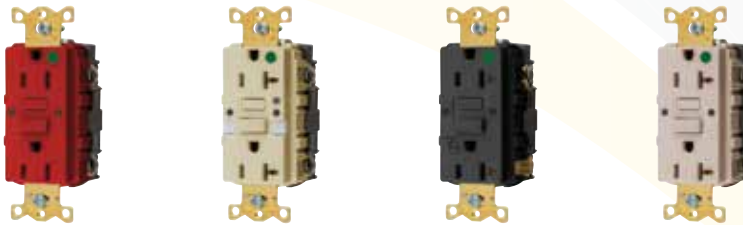- Fed. Spec UL Listed, Hospital Grade
- Green power indicator and red trip indicator
- Patented AUTOGUARD® self test technology
- Flush, nylon face, back and side wired, multiple drive screws, self-grounding staple.



Hospital Grade •		Standard	Night Light	Alarm	Assembled in USA
Rating	Color		Two LED Night Lights		
	Ivory	GFRST82I	GFRST82INL	GFRST82IB	GFRST82IU
	Light Almond	GFRST82LA	GFRST82LANL	GFRST82LAB	GFRST82LAU
	White	GFRST82W	GFRST82WNL	GFRST82WB	GFRST82WU
	Other Colors*	GFRST82*	GFRST82*NL	GFRST82*B	GFRST82*U
	Ivory	GFRST83I	GFRST83INL	GFRST83IB	GFRST83IU
	Light Almond	GFRST83LA	GFRST83LANL	GFRST83LAB	GFRST83LAU
	White	GFRST83W	GFRST83WNL	GFRST83WB	GFRST83WU
	Other Colors*	GFRST83*	GFRST83*NL	GFRST83*B	GFRST83*U

Hospital Grade • SNAPConnect®		Right Angle Pigtailed Terminal		
Rating	Color		Solid	Stranded
	Ivory	GFRST82SNAPI	Clear right angle terminal with 6 inch leads, 600V, #12 AWG THHN/THWN-2, Polycarbonate housing material.	SNAP1RA
	Light Almond	GFRST82SNAPLA		SNAP2RA
	White	GFRST82SNAPW		
	Other Colors*	GFRST82SNAP*		
	Ivory	GFRST83SNAPI		
	Light Almond	GFRST83SNAPLA		
	White	GFRST83SNAPW		
	Other Colors*	GFRST83SNAP*		



*Other colors include the following. To order, please replace * with the color code in parentheses. Almond (AL), Black (BK), Brown (No Suffix), Gray (GY) and Red (R).