

Extra Heavy Duty Industrial GFCI Receptacles



Hubbell's Exclusive Extra Heavy Duty Industrial GFR is specifically designed and built to withstand demanding applications and environments.

Factory equipment, portable generators and waste water treatment plants are just a few of the many challenging installations requiring an additional level of performance.

The industrial GFR meets these unique applications through innovative design, superior materials and a corrosion resistant robust construction.

This safety solution includes Tamper-Resistant (TR) and Weather Resistant (WR) as standard construction.



Extra Heavy Duty Industrial GFCI Receptacles

Features and Benefits

- Heavy Duty robust construction; high impact resistant polyester housing, (UV) stabilized, (V0) flammability rating
- Corrosion Resistant; nickel plated face contacts, mounting strap, line/load terminals and terminal clamps; stainless steel screws
- Tamper and Weather Resistance are standard features for all Hubbell industrial ground fault receptacles
- Patented auto monitor, power denial technology, first in the industry introduced over (15) years ago
- Multiple indicators – power (green), trip ground fault (red) and end of life (flashing red)



Ordering Information

Description	Color	Industrial		Industrial Hospital Grade	
		15A	20A	15A	20A
Extra Heavy Duty Industrial Ground Fault Receptacle 20A 125V Feed-Through Tamper and Weather Resistant.	Brown	GF5262SG	GF5362SG	GF8200SG	GF8300SG
	Black	GF5262SGBK	GF5362SGBK	GF8200SGBK	GF8300SGBK
	Gray	GF5262SGGY	GF5362SGGY	GF8200SGGY	GF8300SGGY
	Ivory	GF5262SGI	GF5362SGI	GF8200SGI	GF8300SGI
	Red	GF5262SGR	GF5362SGR	GF8200SGR	GF8300SGR
	White	GF5262SGW	GF5362SGW	GF8200SGW	GF8300SGW
	Yellow	GF5262SGYEL	GF5362SGYEL	—	—

Code and Standard Compliance

National Electric Code®	Compliant with NEC® 406.12 and NEC® 517-18c for Tamper-Resistance Compliant with NEC® 406.9 for Weather Resistance
Industry Standards	NEMA WD6, ANSI C-73, NOM, National Electric Code, Canadian Electric Code


Ratings

Amperage	15 Amp/20 Amp
Feed-through	20 Amp Protection
Voltage	120V AC (- 15%, + 10%)
Frequency	60 Hz
Dielectric	Withstand 1,500V
Flammability	V0 per UL 94
Operating Temp	(-35°C to 66°C)
Trip Level	(4mA to 6mA) .025 sec.
Short Circuit	10,000 Amps

Certifications

UL Listing	E41978 Fed Spec
UL Std 498	Receptacle
UL Std 943	GFCI
UL Std 943	Dust Resistant
UL Std 943	Corrosion Resistant
NEC®/CEC®	TR, WR Resistant
CSA Listing	LR24886
CSA Std	C22.2 No. 42
CSA Tech	No. M-02A

Dimensions

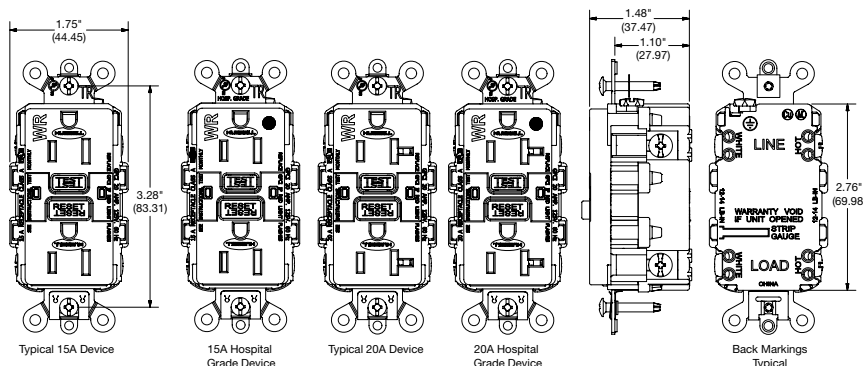

Construction

Termination	Back and Side
Terminal	#14 to # 10AWG
Grounding	Autoground Clip
Power Indicator	Solid Green
GF/Trip Indicator	Solid Red
End of Life	Flashing Red
Contacts/Bridge	Nickel Plated
Printed Circuit Board	Conformal Coat
Scored Bridge	OEM Installations

HUBBELL®
Wiring Device-Kellems

www.hubbell-wiring.com

