

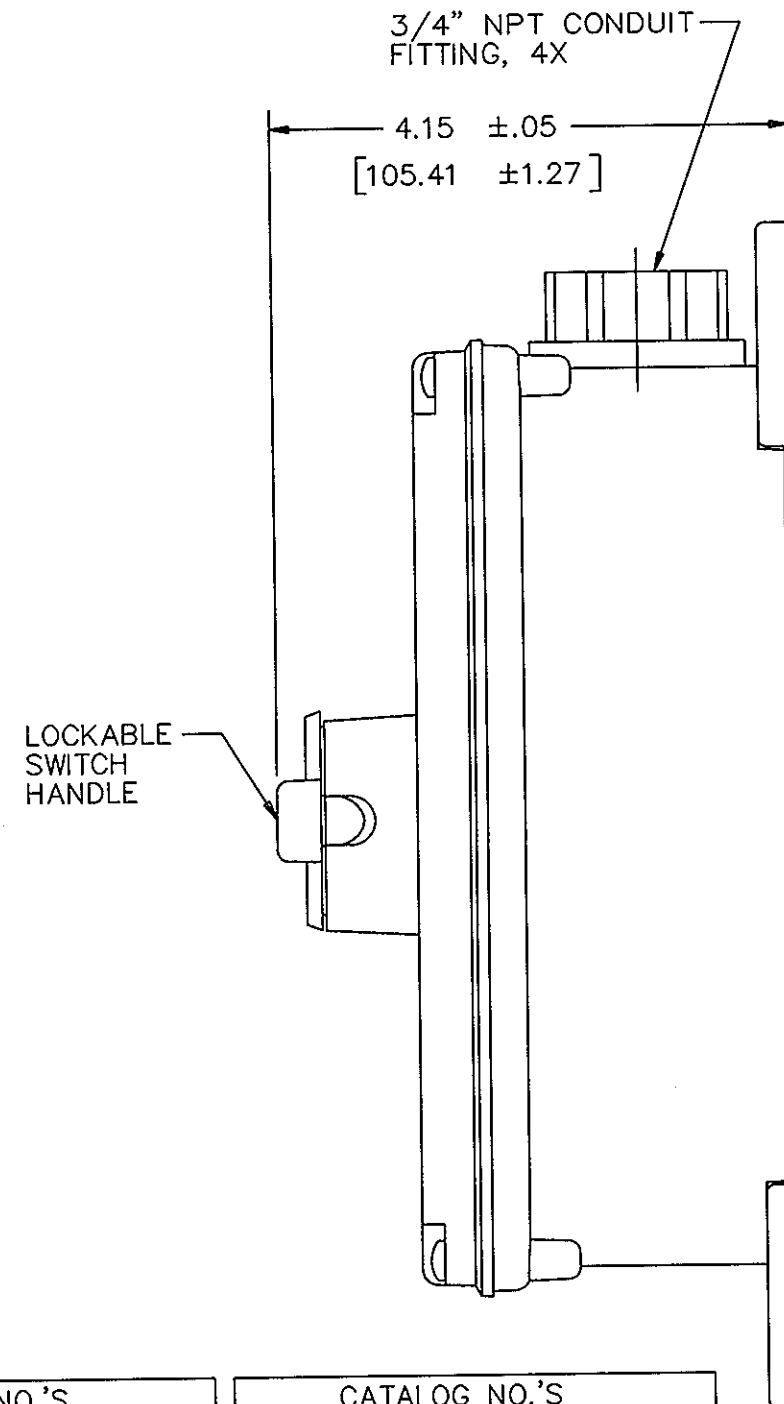


M-7093 7

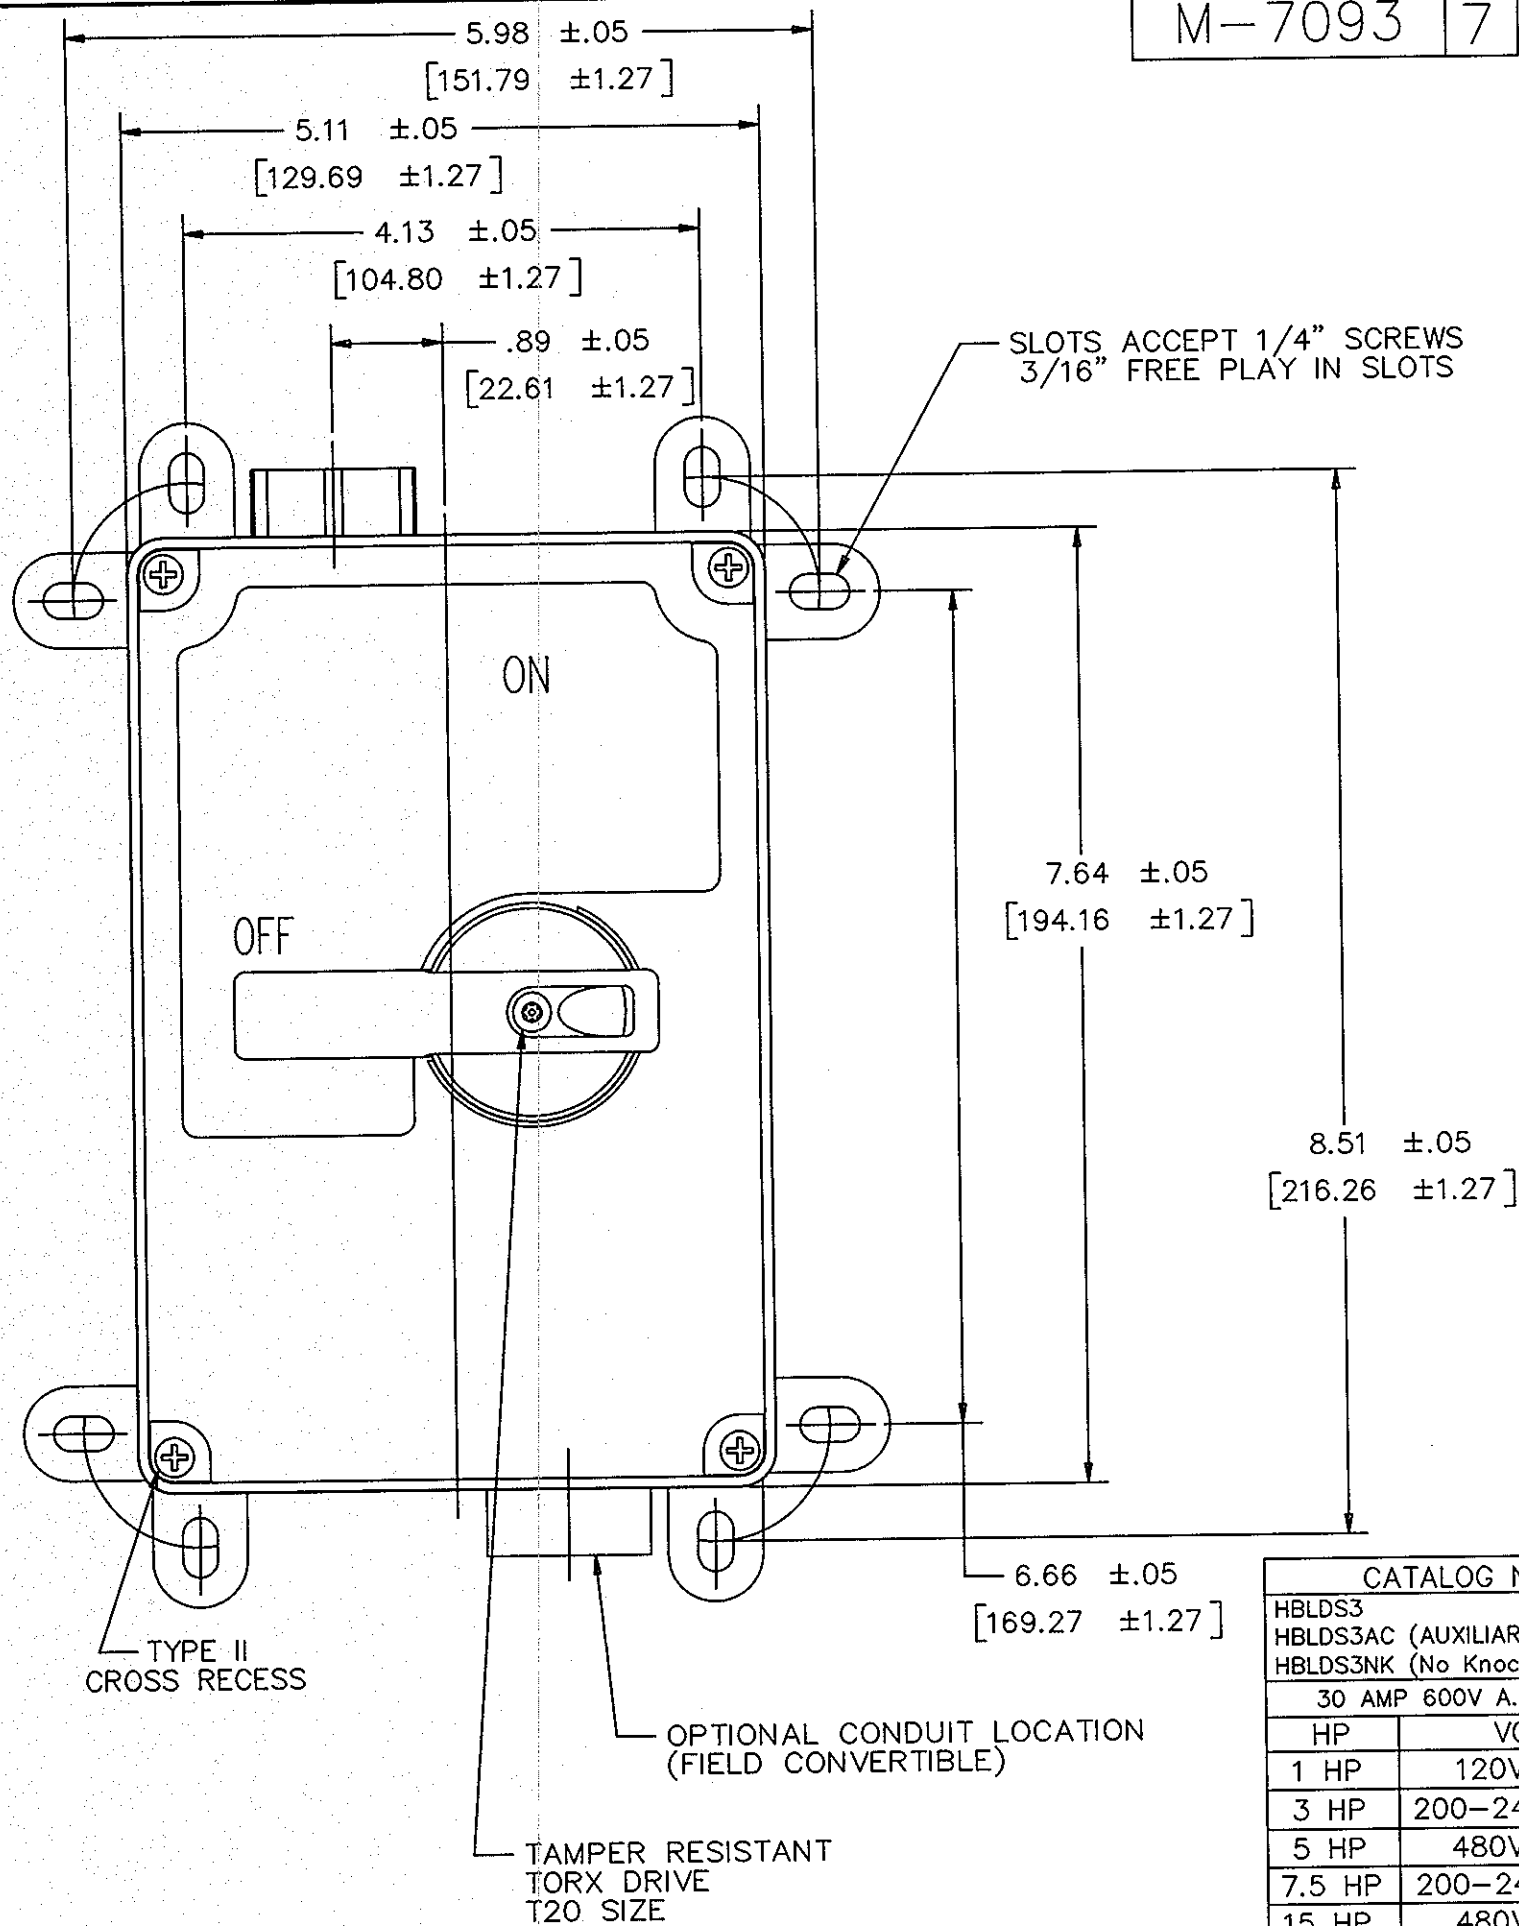

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
ALL EXTERNAL PLASTIC PARTS	UV STABILIZED POLYESTER/POLYCARBONATE BLEND	
FRAME	GALVANIZED STEEL	
ALL EXTERNAL SCREWS AND HARDWARE	STAINLESS STEEL	
CONDUIT HUB	ZINC	

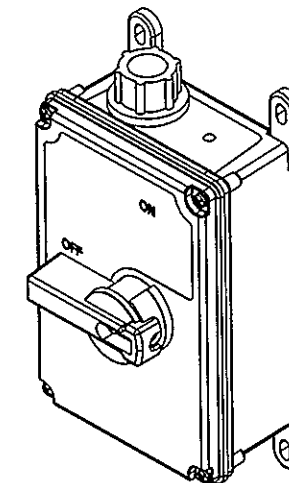

CATALOG NO. HBLDS3
(NOT SHOWN TO SCALE)

7	ADDED ISO VIEW TO INDICATE SOLID MODEL EMBEDDED IN DRAWING. PER DCN 21895 DDL	DJP	02/22/16
6	ADDED CAT. NO. HBLDS3NK PER DCN 14639 WRV	WRV	9/20/07
5	ADDED RATING TABLE PER DCN 14262 MJM	TLS	9/20/07
4	REVISED RATING TABLE PER DCN #13625 RCM	TLS	1/26/07
SYM	REVISIONS	APP	DATE

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE		
CIRCUIT-LOCK™ DISCONNECT SWITCH		
TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED SHELTON, CT
FRACTIONS ±1/64	DR. BY PG	APP. BY WRV
DECIMALS ±.005	TR. BY	SCALE NONE
ANGLES ±2°	CHK'D BY WRV	DATE 11/11/92

CATALOG NO.'S	
HBLDS3	
HBLDS3AC (AUXILIARY CONTACT)	
HBLDS3NK (No Knockouts)	
30 AMP 600V A.C. RATINGS	
HP	VOLTAGE
1 HP	120V AC 1ø
3 HP	200-240V AC 1ø
5 HP	480V AC 1ø
7.5 HP	200-240V AC 3ø
15 HP	480V AC 3ø
15 HP	600V AC 3ø

CATALOG NO.'S	
HBLDS33ACNK (3 AUX. CONTACT)	
30 AMP 600V A.C. RATINGS	
HP	VOLTAGE
1 HP	120V AC 1ø
2.5 HP	220-277V AC 1ø
5 HP	480V AC 1ø
5 HP	208-240V AC 1ø
10 HP	480V AC 3ø
10 HP	600V AC 3ø