

Wallplates and Covers

Features and Benefits

Stainless Steel Wallplates

Provide solutions for a variety of industrial and commercial applications.

302/304 Type Stainless Steel

Non-magnetic: 18.0% Chromium
8.0% Nickel

- Ideal for highly corrosive environments such as hospitals, food processing, static free requirements and more
- Environments subjected to heavy abuse

430 Type Stainless Steel

Magnetic: 17.0% Chromium
Less than 0.5% Nickel


- Aesthetically identical to the 302/304 type stainless steel wallplates and are best suited for environments where corrosion resistance is less critical
- Standard commercial use

Smooth Solid Brass

- Provides a plush appearance with the durability of metal
- Finish is lacquer coated to inhibit oxidation

Anodized Aluminum

- Non-magnetic and corrosion resistance for a wide range of applications
- Finish is lacquer coated to inhibit oxidation

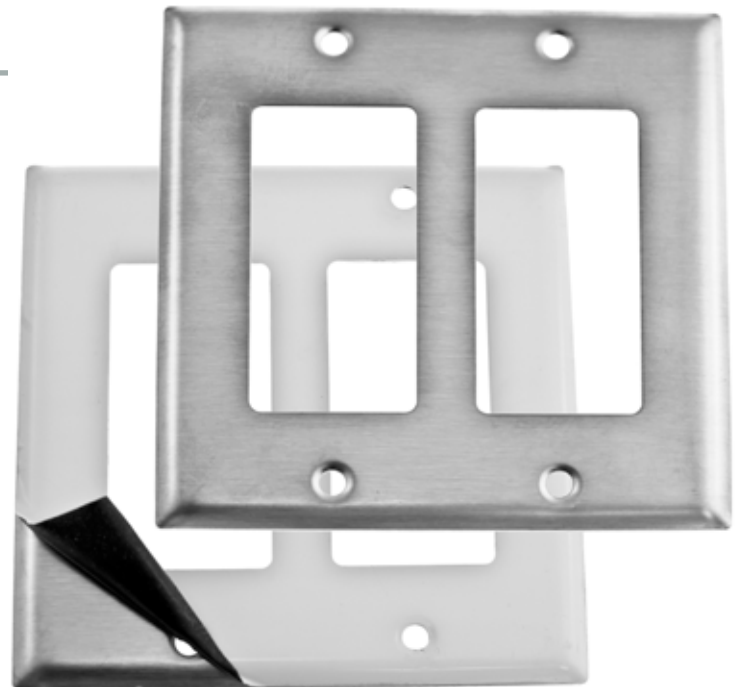

Decorator
(Protective plastic film helps to prevent scratches and damage)



Extra-Duty Metallic While-in-Use Covers

These covers are designed for use whenever protection is required while an outlet is in use. Covers meet or exceed the extra-duty rating per UL 514D, and are NEMA 3R rated.

- Die-cast aluminum construction
- Powder coated “chip resistant” paint corrosion protection
- Unique plug management provision for securing device and cord

2017 National Electrical Code (NEC®) Requirement

406.9 Receptacles in Damp or Wet Locations.

(B) Wet Locations.

(1) 15 and 20 Ampere Receptacles in a Wet Location. 15 and 20 ampere, 125 and 250 volt receptacles installed in a wet location shall have an enclosure that is weatherproof whether or not the attachment plug cap is inserted. An outlet box hood installed for this purpose shall be listed, and shall be identified as “extra-duty.” Other listed products, enclosures, or assemblies providing weatherproof protection that do not utilize an outlet box need not be marked “extra-duty.” All 15 and 20 ampere, 125 and 250 volt nonlocking-type receptacles shall be listed weather-resistant type.







Exception: 15 and 20 ampere, 125 through 250 volt receptacles installed in a wet location and subject to routine high-pressure spray washing shall be permitted to have an enclosure that is weatherproof when the attachment plug is removed.

(2) Other Receptacles. All other receptacles installed in a wet location shall comply with (B)(2)(a) or (B)(2)(b).




(a) A receptacle installed in a wet location, where the product intended to be plugged into it is not attended while in use, shall have an enclosure that is weatherproof with the attachment plug cap inserted or removed.

(b) A receptacle installed in a wet location where the product intended to be plugged into it will be attended while in use (e.g., portable tools) shall have an enclosure that is weatherproof when the attachment plug is removed.

347 Volt Toggle Wallplates with 2.25" (57.2) Spacing Between Gangs, Stamped "347V"

Description	Color	Nylon Catalog Number	Material	Metal Catalog Number
1-Gang, 1-Toggle, 2.25 in. (57.2) Spacing 	Black	-	Aluminum	-
	Gray	-	Brass	-
	Ivory	-	Brass Plated	-
	White	-	Chrome	-
				S/S 302/304
			S/S 430	-
2-Gang, 2-Toggle, 2.25 in. (57.2) Spacing 	Black	-	Aluminum	-
	Gray	-	Brass	-
	Ivory	-	Brass Plated	-
	White	-	Chrome	-
				S/S 302/304
			S/S 430	-
3-Gang, 3-Toggle, 2.25 in. (57.2) Spacing 	Black	-	Aluminum	-
	Gray	-	Brass	-
	Ivory	-	Brass Plated	-
	White	-	Chrome	-
				S/S 302/304
			S/S 430	-
4-Gang, 4-Toggle, 2.25 in. (57.2) Spacing 	Black	-	Aluminum	-
	Gray	-	Brass	-
	Ivory	-	Brass Plated	-
	White	-	Chrome	-
				S/S 302/304
			S/S 430	-
5-Gang, 5-Toggle, 2.25 in. (57.2) Spacing 	Black	-	Aluminum	-
	Gray	-	Brass	-
	Ivory	-	Brass Plated	-
	White	-	Chrome	-
				S/S 302/304
			S/S 430	-
6-Gang, 6-Toggle, 2.25 in. (57.2) Spacing 	Black	-	Aluminum	-
	Gray	-	Brass	-
	Ivory	-	Brass Plated	-
	White	-	Chrome	-
				S/S 302/304
			S/S 430	-

347 Volt Decorator Wallplates

Description	Color	Nylon Catalog Number	Material	Metal Catalog Number
1-Gang, 1-Decorator 	Black	HPS1347BK	Aluminum	-
	Gray	HPS1347GY	Brass	-
	Ivory	HPS1347I	Brass Plated	-
	White	HPS1347W	Chrome	-
				S/S 302/304
			S/S 430	-
2-Gang, 2-Decorator 	Black	HPS2347BK	Aluminum	-
	Gray	HPS2347GY	Brass	-
	Ivory	HPS2347I	Brass Plated	-
	White	HPS2347W	Chrome	-
				S/S 302/304
			S/S 430	-
3-Gang, 3-Decorator 	Ivory	HPS3347I	Aluminum	-
	White	HPS3347W	Brass	-
			Brass Plated	-
			Chrome	-
				S/S 302/304
			S/S 430	-

Note: All nylon wallplates feature pre-inserted captive screws for faster assembly, up to 6-gang.

Dimensions in Inches (mm)