
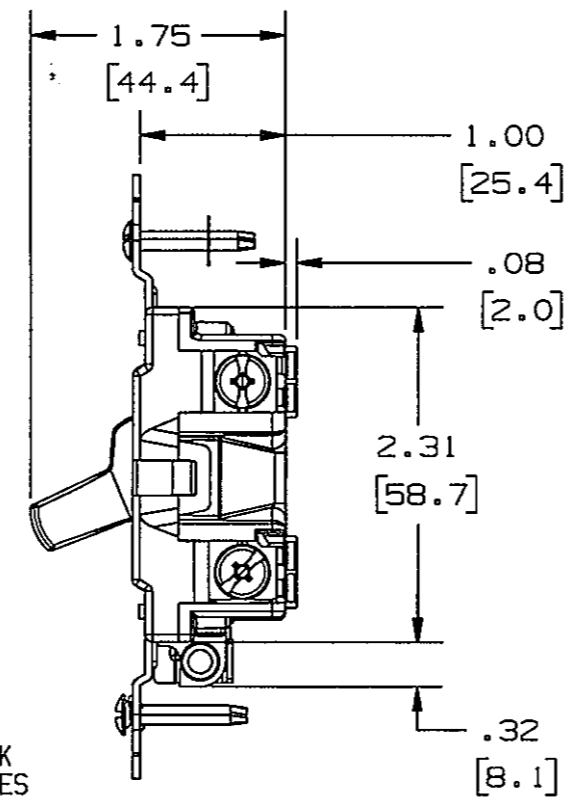


M-10870 3

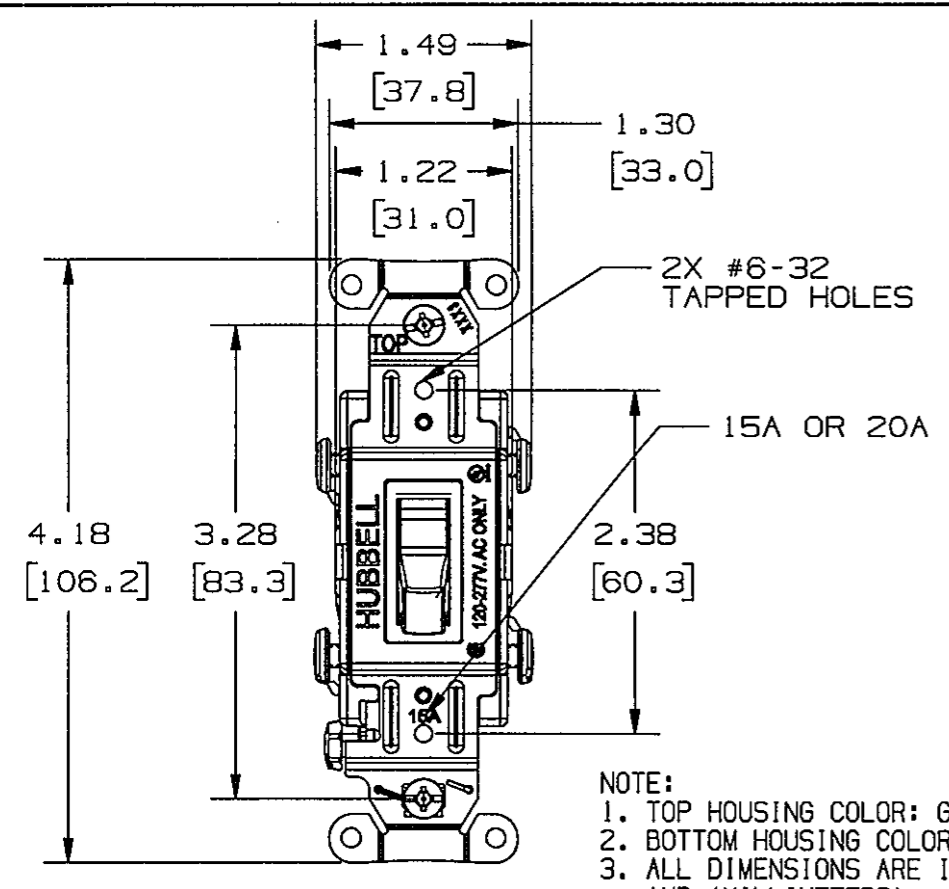

NOTE:
 1. TOP HOUSING COLOR: GRAY
 2. BOTTOM HOUSING COLOR: BLACK
 3. ALL DIMENSIONS ARE IN INCHES AND (MILLIMETERS)

CATALOG NO.	RATING/TYPE	TOGGLE COLOR
CSB115	15A 120-277VAC S.P.	BROWN
CSB115I	15A 120-277VAC S.P.	IVORY
CSB115GY	15A 120-277VAC S.P.	GRAY
CSB115W	15A 120-277VAC S.P.	WHITE
CSB115BK	15A 120-277VAC S.P.	BLACK
CSB115OW	15A 120-277VAC S.P.	OFFICE WHITE
CSB115AL	15A 120-277VAC S.P.	ALMOND
CSB115LA	15A 120-277VAC S.P.	LIGHT ALMOND
CSB215	15A 120-277VAC D.P.	BROWN
CSB215I	15A 120-277VAC D.P.	IVORY
CSB215GY	15A 120-277VAC D.P.	GRAY
CSB215W	15A 120-277VAC D.P.	WHITE
CSB215BK	15A 120-277VAC D.P.	BLACK
CSB215OW	15A 120-277VAC D.P.	OFFICE WHITE
CSB215AL	15A 120-277VAC D.P.	ALMOND
CSB215LA	15A 120-277VAC D.P.	LIGHT ALMOND
CSB315	15A 120-277VAC 3W	BROWN
CSB315I	15A 120-277VAC 3W	IVORY
CSB315GY	15A 120-277VAC 3W	GRAY
CSB315W	15A 120-277VAC 3W	WHITE
CSB315BK	15A 120-277VAC 3W	BLACK
CSB315OW	15A 120-277VAC 3W	OFFICE WHITE
CSB315AL	15A 120-277VAC 3W	ALMOND
CSB315LA	15A 120-277VAC 3W	LIGHT ALMOND
CSB415	15A 120-277VAC 4W	BROWN
CSB415I	15A 120-277VAC 4W	IVORY
CSB415GY	15A 120-277VAC 4W	GRAY
CSB415W	15A 120-277VAC 4W	WHITE
CSB415BK	15A 120-277VAC 4W	BLACK
CSB415OW	15A 120-277VAC 4W	OFFICE WHITE
CSB415AL	15A 120-277VAC 4W	ALMOND
CSB415LA	15A 120-277VAC 4W	LIGHT ALMOND
CSB120	20A 120-277VAC S.P.	BROWN
CSB120I	20A 120-277VAC S.P.	IVORY
CSB120GY	20A 120-277VAC S.P.	GRAY
CSB120W	20A 120-277VAC S.P.	WHITE
CSB120R	20A 120-277VAC S.P.	RED
CSB120BK	20A 120-277VAC S.P.	BLACK
CSB120OW	20A 120-277VAC S.P.	OFFICE WHITE
CSB120AL	20A 120-277VAC S.P.	ALMOND
CSB120LA	20A 120-277VAC S.P.	LIGHT ALMOND
CSB220	20A 120-277VAC D.P.	BROWN
CSB220I	20A 120-277VAC D.P.	IVORY
CSB220GY	20A 120-277VAC D.P.	GRAY
CSB220W	20A 120-277VAC D.P.	WHITE
CSB220R	20A 120-277VAC D.P.	RED
CSB220BK	20A 120-277VAC D.P.	BLACK
CSB220OW	20A 120-277VAC D.P.	OFFICE WHITE
CSB220AL	20A 120-277VAC D.P.	ALMOND
CSB220LA	20A 120-277VAC D.P.	LIGHT ALMOND
CSB320	20A 120-277VAC 3W	BROWN
CSB320I	20A 120-277VAC 3W	IVORY
CSB320GY	20A 120-277VAC 3W	GRAY
CSB320W	20A 120-277VAC 3W	WHITE
CSB320R	20A 120-277VAC 3W	RED
CSB320BK	20A 120-277VAC 3W	BLACK
CSB320OW	20A 120-277VAC 3W	OFFICE WHITE
CSB320AL	20A 120-277VAC 3W	ALMOND
CSB320LA	20A 120-277VAC 3W	LIGHT ALMOND
CSB420	20A 120-277VAC 4W	BROWN
CSB420I	20A 120-277VAC 4W	IVORY
CSB420GY	20A 120-277VAC 4W	GRAY
CSB420W	20A 120-277VAC 4W	WHITE
CSB420R	20A 120-277VAC 4W	RED
CSB420BK	20A 120-277VAC 4W	BLACK
CSB420OW	20A 120-277VAC 4W	OFFICE WHITE
CSB420AL	20A 120-277VAC 4W	ALMOND
CSB420LA	20A 120-277VAC 4W	LIGHT ALMOND

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
TOGGLE	THERMOPLASTIC	NONE
TOP HOUSING	THERMOPLASTIC	NONE
BOTTOM HOUSING	THERMOPLASTIC	NONE
RUBBER BUMPER	ELASTOMER	NONE
RIVET	STEEL	ZINC PLATED
GROUND SPRING	STAINLESS STEEL	NONE
MOUNTING SCREW	STEEL	ZINC PLATED
WASHER	THERMOPLASTIC	NONE
BRIDGE	STEEL	ZINC PLATED
GROUND SCREW	STEEL	DYE GREEN
GROUND CLAMP	STEEL	NI PLATED
WIRE CLAMP	STEEL	NI PLATED
ACTUATOR SPRING	SPRING WIRE	NONE
SPRING HOLDER	BRASS ALLOY	NONE
STATIONARY TERMINAL	BRASS ALLOY	BRIGHT DIP
BRUSH TERMINAL-L	BRASS ALLOY	BRIGHT DIP
BRUSH TERMINAL-R	BRASS ALLOY	BRIGHT DIP
CROSSOVER TERMINAL	BRASS ALLOY	BRIGHT DIP
TERMINAL SCREW	STEEL	PLATED
SILVER CONTACT	CADMIUM FREE SILVER ALLOY	NONE

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE


NON-REPAIRABLE

B


M-10870

3


SINGLE POLE/BACK WIRE & SIDE WIRE

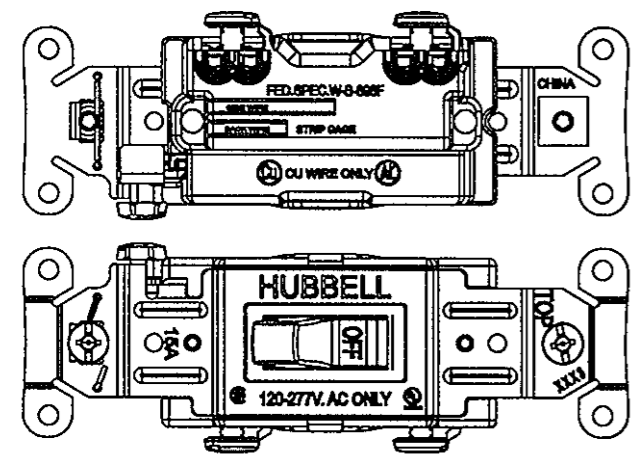


DOUBLE POLE/BACK WIRE & SIDE WIRE

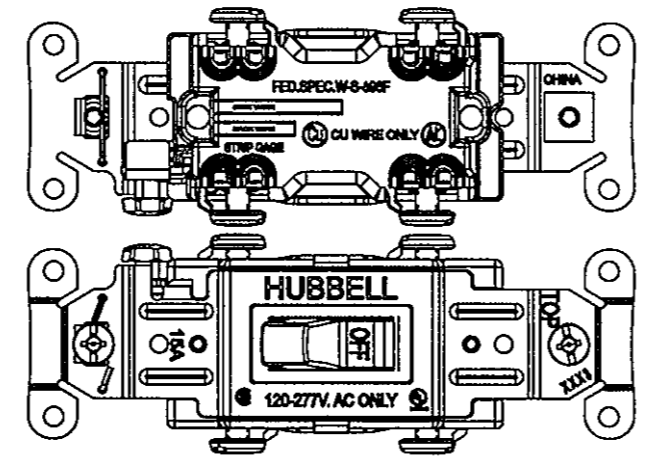

3W/BACK WIRE & SIDE WIRE

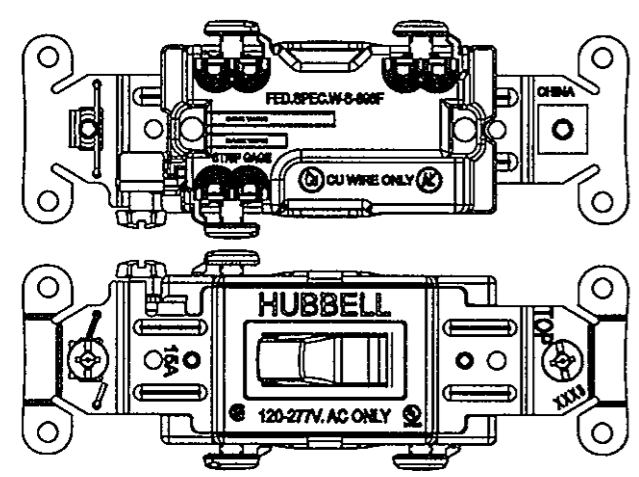

4W/BACK WIRE & SIDE WIRE

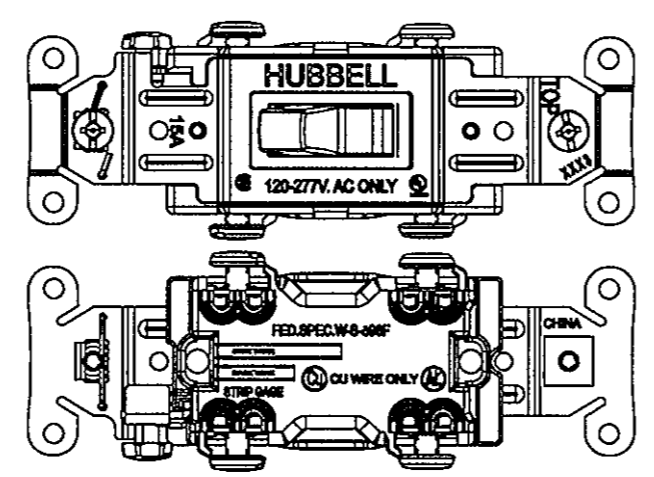

SYM	REVISIONS	APP	DATE
3	NO CHANGES TO THIS SHEET. PER DCN 18914 DDL	EJM	06/14/12
2	10-19-11 ADDED C120BK AND CS320BK TO CHART PER DCN18422 DMP	DMP	10/19/11
1	6/17/09 RELEASE FOR PRODUCTION PER DCN#15750 C.Z	C.Z	6/17/09

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE SPECIFICATION GRADE COMMERCIAL SERIES 15A & 20A BACK & SIDE WIRE AC TOGGLE SWITCH, HUBBELL

TOLERANCES UNLESS OTHERWISE SPECIFIED		WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS	± 1/64	DR. BY J. X	APP. BY C. Z
DECIMALS	± .005	TR. BY J. X	SCALE
ANGLES	± 2'	CHK'D BY J. X	DATE 6/17/09