

# Straight Blade Devices

## Accessories

For 15 and 20 Ampere, 125 and 250 Volts and 277 Volts AC Devices



### Wallplates, 1-Gang

Description	Color	Duplex Receptacle	Style Line® Receptacle	Single Receptacle Plate 1.40 in. (35.6) Dia.
Thermoplastic, smooth.	Black	<b>P8BK</b>	<b>P26BK</b>	<b>P7BK</b>
	Brown	<b>P8</b>	<b>P26</b>	<b>P7</b>
	Gray	<b>P8GY</b>	<b>P26GY</b>	<b>P7GY</b>
	Ivory	<b>P8I</b>	<b>P26I</b>	<b>P7I</b>
	Light Almond	<b>P8LA</b>	<b>P26LA</b>	<b>P7LA</b>
	Orange	<b>P8OR</b>	-	-
	Red	<b>P8R</b>	<b>P26R</b>	<b>P7R</b>
	White	<b>P8W</b>	<b>P26W</b>	<b>P7W</b>
Stainless steel 302/304, .035 in. (0.9) horizontal brushed finish.		<b>SS8</b>	<b>SS26</b>	<b>SS7</b>
Brass .04 in. (1.0), horizontal brushed finish.		<b>SB8</b>	<b>SB26</b>	<b>SB7</b>
Aluminum .05 in. (1.3), horizontal brushed finish.		<b>SA8</b>	-	<b>SA7</b>



P8



P26I



SS7

### Weatherproof Covers

Description	Duplex Receptacle	Single Receptacle Plate 1.40 in. (35.6) Dia.
RTP, gray, for FS/FD box mounting.	<b>HBL5221</b>	<b>HBL7423WO</b>
RTP, yellow, for FS/FD box mounting.	<b>HBL52CM21</b>	<b>HBL74CM23WO</b>
RTP, gray, for device mounting.	<b>HBL5222</b>	-
RTP, yellow, for device mounting.	<b>HBL52CM22</b>	-
Cast aluminum for FS/FD box mounting.	<b>HBL5206WO</b>	<b>HBL7420</b>
Cast aluminum for device mounting.	<b>HBL5205WO</b>	-

Note: All weatherproof plates are UL Listed for Wet Locations.  
 Those with suffix WO are listed for use with cover open, all others with cover closed.  
 RTP is an abbreviation for reinforced thermoplastic polyester.  
 See section O for additional information on cover plates.



HBL52CM22



HBL5206WO



HBL7423WO

Dimensions in Inches (mm)

## Accessories for 15 Amp 2 and 3 Wire Devices



P8



SS7



HBL5206WO



HBL5221



HBL7423WO



WP1

### Wallplates, 1-Gang

Description	Color	Duplex Receptacles	Single Receptacles with Face Dia. 1.40" (35.6)
Nylon, smooth.	Brown Ivory	<b>P8</b> <b>P8I</b>	<b>P7</b> <b>P7I</b>
Stainless steel 302/304, .035 in. (0.9), horizontal brushed finish.		<b>SS8</b>	<b>SS7</b>
Stainless steel 430, .035 in. (0.9), horizontal brushed finish.		<b>SS8L</b>	<b>SS7L</b>
Brass .04 in. (1.0), horizontal brushed finish.		<b>SB8</b>	<b>SB7</b>
Aluminum .05 in. (1.3), horizontal brushed finish.		<b>SA8</b>	<b>SA7</b>

### IP44 SUITABILITY

### Weatherproof Covers

Description	Duplex Receptacles	Single Receptacles with Face Dia. 1.40" (35.6)
Cast aluminum, for standard horizontal box mount.	<b>HBL5205WO</b>	-
Same as above except FS/FD box mount.	<b>HBL5206WO</b>	-
Cast aluminum vertical FS/FD box mount.	-	<b>HBL7420</b>
Gray thermoplastic, vertical standard box mount, corrosion resistant.	<b>HBL5222</b>	-
Same as above except yellow.	<b>HBL52CM22</b>	-
Gray thermoplastic, vertical FS/FD box mount, corrosion resistant.	<b>HBL5221</b>	<b>HBL7423WO</b>
Yellow thermoplastic, vertical FS/FD box mount, corrosion resistant.	<b>HBL52CM21</b>	<b>HBL74CM23WO</b>
White thermoplastic, vertical FS/FD box mount, corrosion resistant.	<b>HBL52CM21W</b>	-

### IP44 SUITABILITY

### Weatherproof Covers for 15A Nylon Flanged Receptacles and Inlets

Description	Duplex Receptacles	Single Receptacles with Face Dia. 1.40" (35.6)
Gray thermoplastic, corrosion resistant.	-	<b>WP1</b>

Note: All weatherproof covers listed above are UL Listed for wet and damp locations with cover closed.  
Those with suffix WO are UL Listed with cover open.  
See page O-23 for additional information on weatherproof covers.


# Wallplates and Covers

## Features and Benefits

### Non-metallic Wallplates

Hubbell's line of polycarbonate wallplates features larger standard sized wallplates to provide extra coverage to hide rough box opening, improved aesthetics, greater strength, impact resistance, along with easy to clean finish in all different types of environments.

- Standard size is 1/8 inch larger to give you extra coverage to hide rough box openings. Also available in mid-size, jumbo and pre-marked
- Smooth satin finish, blends into the wall
- More rigid, sharper lines
- Captive screw feature holds mounting screw in place for quick and easy installation, single gang
- High-impact polycarbonate thermoplastic is virtually unbreakable
- Smooth, easy to clean finish is highly resistant to solvents and cleaning solutions, providing long life in the harshest environments
- cULus listed

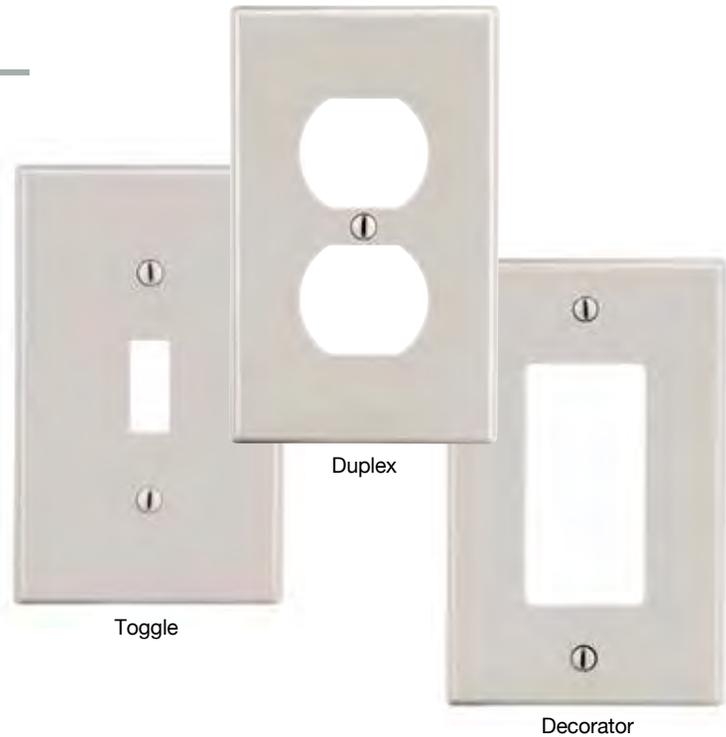

Hubbell's standard sized wallplates are 1/8 inch larger to provide you that extra coverage to hide rough box openings. The depth is 1/4 inch so that it will comfortably fit over the device even on imperfect installations or on retrofit work. See page O-32 for details and dimensions.


### Non-metallic Wallplates




### Non-metallic Pre-Marked Wallplates



### Metal Wallplates

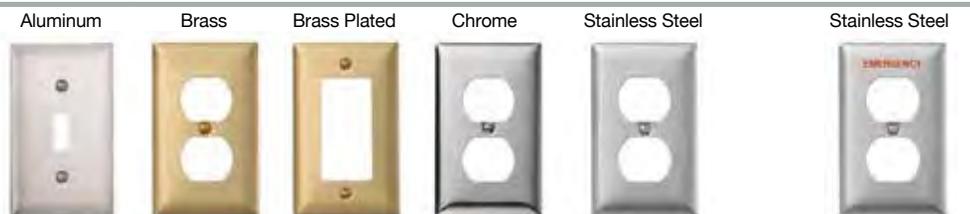

## Duplex Receptacle Wallplates

Description	Color	Thermoplastic			Material	Metal Catalog Number
		Standard	Mid-Size	Jumbo		
1-Gang, 1-Duplex 	Black	<b>P8BK</b>	<b>PJ8BK</b>	-	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	<b>SA8</b>
	Blue	-	<b>PJ8BL</b>	-		<b>SB8</b>
	Brown	<b>P8</b>	<b>PJ8</b>	-		<b>SBP8</b>
	Gray	<b>P8GY</b>	<b>PJ8GY</b>	-		<b>SCH8</b>
	Ivory	<b>P8I</b>	<b>PJ8I</b>	<b>NPJJ8I</b>		<b>SS8</b>
	Light Almond	<b>P8LA</b>	<b>PJ8LA</b>	<b>NPJJ8LA</b>		<b>SS8L</b>
	Orange	<b>P8OR</b>	-	-		
	Red	<b>P8R</b>	<b>PJ8R</b>	-		
	White	<b>P8W</b>	<b>PJ8W</b>	<b>NJJ8W</b>		
2-Gang, 2-Duplex 	Black	<b>P82BK</b>	<b>PJ82BK</b>	-	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	<b>SA82</b>
	Brown	<b>P82</b>	-	-		<b>SB82</b>
	Gray	<b>P82GY</b>	<b>PJ82GY</b>	-		<b>SBP82</b>
	Ivory	<b>P82I</b>	<b>PJ82I</b>	-		<b>SCH82</b>
	Light Almond	<b>P82LA</b>	<b>PJ82LA</b>	-		<b>SS82</b>
	Orange	<b>P82OR</b>	-	-		<b>SS82L</b>
	Red	<b>P82R</b>	<b>PJ82R</b>	-		
	White	<b>P82W</b>	<b>PJ82W</b>	-		
	3-Gang, 3-Duplex 	Ivory	<b>P83I</b>	-		-
White		<b>P83W</b>	-	-	⓪ ⓪ ⓪ <b>SS83</b> -	
4-Gang, 4-Duplex 					Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	⓪ ⓪ ⓪ ⓪ <b>SS84</b> -
2-Gang, 1-Duplex 					Brass Brass Plated Chrome S/S 302/304 S/S 430	- - - <b>SS748</b> -

## Single 15/20A Straight Blade or 15A Twist-Lock® Receptacle Wallplates

Description	Color	Thermoplastic			Material	Metal Catalog Number
		Standard	Mid-Size	Jumbo		
1-Gang, 1-Single 1.40 in. (35.6) Dia. Hole 	Black	<b>P7BK</b>	-	-	Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	<b>SA7</b>
	Brown	<b>P7</b>	-	-		<b>SB7</b>
	Gray	<b>P7GY</b>	-	-		<b>SBP7</b>
	Ivory	<b>P7I</b>	<b>PJ7I</b>	-		<b>SCH7</b>
	Light Almond	<b>P7LA</b>	<b>PJ7LA</b>	-		<b>SS7</b>
	Red	<b>P7R</b>	-	-		<b>SS7L</b>
	White	<b>P7W</b>	<b>PJ7W</b>	-		
2-Gang, 1-Single 1.40 in. (35.6) Dia. Hole 					Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	- - - - <b>SS747</b> -
2-Gang, 2-Single 1.40 in. (35.6) Dia. Hole 					Aluminum Brass Brass Plated Chrome S/S 302/304 S/S 430	⓪ ⓪ ⓪ ⓪ <b>SS72</b> -

Note: Thermoplastic wallplates feature pre-inserted captive screws for faster assembly in single gang configurations.

⓪ Available as a custom wallplate, see pages O-32 to O-34. Consult custom wallplates section for additional openings and combinations.

Dimensions in Inches (mm)

## Wallplates

### Nylon plates—virtually unbreakable

- Rounded corners for stylish look
- Reinforced ribs for extra strength
- Screws are factory-inserted for fumble-free installation

### Stainless Steel plates

- Type 302/304
- Non-magnetic
- Ideal for highly corrosive environments

Description	Color	Smooth Nylon		Material	Smooth Metal Catalog Number
		Standard	Mid-Size		
 1-Gang, 1-Toggle	Black Brown Gray Ivory White	<b>P1BK</b> <b>P1</b> <b>P1GY</b> <b>P1I</b> <b>P1W</b>	<b>PJ1BK</b> <b>PJ1</b> <b>PJ1GY</b> <b>PJ1I</b> <b>PJ1W</b>	Brass Stainless Steel	<b>SB1</b> <b>SS1</b>
 1-Gang, 1-Duplex	Black Brown Gray Ivory White	<b>P8BK</b> <b>P8</b> <b>P8GY</b> <b>P8I</b> <b>P8W</b>	<b>PJ8BK</b> <b>PJ8</b> <b>PJ8GY</b> <b>PJ8I</b> <b>PJ8W</b>	Brass Stainless Steel	<b>SB8</b> <b>SS8</b>
 1-Gang, 1-Decorator	Black Brown Gray Ivory White	<b>P26BK</b> <b>P26</b> <b>P26GY</b> <b>P26I</b> <b>P26W</b>	<b>PJ26BK</b> <b>PJ26</b> <b>PJ26GY</b> <b>PJ26I</b> <b>PJ26W</b>	Brass Stainless Steel	<b>SB26</b> <b>SS26</b>
 2-Gang, 2-Toggle	Black Brown Gray Ivory White	<b>P2BK</b> <b>P2</b> <b>P2GY</b> <b>P2I</b> <b>P2W</b>	<b>PJ2BK</b> <b>PJ2</b> <b>PJ2GY</b> <b>PJ2I</b> <b>PJ2W</b>	Brass Stainless Steel	<b>SB2</b> <b>SS2</b>
 2-Gang, 2-Duplex	Black Brown Gray Ivory White	<b>P82BK</b> <b>P82</b> <b>P82GY</b> <b>P82I</b> <b>P82W</b>	<b>PJ82BK</b> <b>PJ82</b> <b>PJ82GY</b> <b>PJ82I</b> <b>PJ82W</b>	Brass Stainless Steel	<b>SB82</b> <b>SS82</b>
 2-Gang, 2-Decorator	Black Brown Gray Ivory White	<b>P262BK</b> <b>P262</b> <b>P262GY</b> <b>P262I</b> <b>P262W</b>	<b>PJ262BK</b> <b>PJ262</b> <b>PJ262GY</b> <b>PJ262I</b> <b>PJ262W</b>	Brass Stainless Steel	<b>SB262</b> <b>SS262</b>
 2-Gang, 1-Toggle, 1-Duplex	Black Brown Gray Ivory White	<b>P18BK</b> <b>P18</b> <b>P18GY</b> <b>P18I</b> <b>P18W</b>	<b>PJ18BK</b> <b>PJ18</b> <b>PJ18GY</b> <b>PJ18I</b> <b>PJ18W</b>	Brass Stainless Steel	<b>SB18</b> <b>SS18</b>
 2-Gang, 1-Toggle, 1-Decorator	Black Brown Gray Ivory White	<b>P126BK</b> <b>P126</b> <b>P126GY</b> <b>P126I</b> <b>P126W</b>	<b>PJ126BK</b> <b>PJ126</b> <b>PJ126GY</b> <b>PJ126I</b> <b>PJ126W</b>	Brass Stainless Steel	<b>SB126</b> <b>SS126</b>
 1-Gang, 1-Single 1.40" Dia. Hole	Black Brown Gray Ivory White	<b>P7BK</b> <b>P7</b> <b>P7GY</b> <b>P7I</b> <b>P7W</b>	<b>PJ7BK</b> <b>PJ7</b> <b>PJ7GY</b> <b>PJ7I</b> <b>PJ7W</b>	Brass Stainless Steel	<b>SB7</b> <b>SS7</b>
 1-Gang, 1-Blank, Box Mount	Black Brown Gray Ivory White	<b>P13BK</b> <b>P13</b> <b>P13GY</b> <b>P13I</b> <b>P13W</b>	<b>PJ13BK</b> <b>PJ13</b> <b>PJ13GY</b> <b>PJ13I</b> <b>PJ13W</b>	Brass Stainless Steel	<b>SB13</b> <b>SS13</b>