



## Cross Tap Clamps/DeadEnd Clamps

### T&B Catalog Number:

**UPC Number:**

DLC25

**Status:**

78378694964

**Description:**


Active

Type DLC - Single U-Bolt Aluminum Fittings for Wire Range Main AWG or kcmil 397.5 - 1/0 Str., ACSR Main 336.4 - 1/0, 1/0 - 6 AR

### Features

Spacer interlocks with U-bolt - won't drop out. For use on copper, aluminum and ACSR conductors. Suitable for dead-end loop connections. No special tools required for installation.

Spring action counteracts cold flow. Extra-long separating spacer made of high conductive aluminum. Hardware of high-strength galvanized steel.

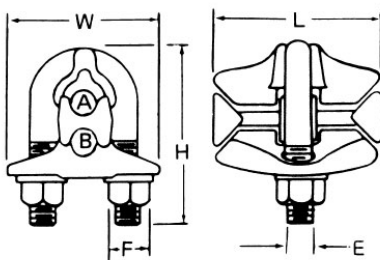

### General

Style	Type DLC - Single U-Bolt Aluminum Fittings
Material	Aluminum
Conductor Range ACSR Main	336.4 - 1/0, 1/0 - 6 AR
Conductor Range ACSR Tap	336.4 - 1/0, 1/0 - 6 AR
Conductor Range AWG Main	397.5 - 1/0 Str.
Conductor Range AWG Tap	397.5 - 1/0 Str.

### Dimension Information

E (inches)	1/2
F (inches)	3/4
H (inches)	4
L (inches)	3 3/16
W (inches)	2 3/8
Conductor Diameter A	.368 - .684
Conductor Diameter B	.368 - .743

### Packaging

T&B Order Multiple	25
Package in Units	25
T&B Sold in UOM	Each
T&B Weight Per UOM	97.8 lbs. per 100

### Notes

Order prefilled with oxide inhibitor (suffix 9) for use on aluminum-to-copper connections.

### Certifications

RoHS Compliance	Yes
-----------------	-----

**For further technical assistance, please contact us...**

Thomas & Betts - USA  
8155 T&B Blvd.  
Memphis, TN 38125  
www.tnb.com

T&B Technical Support  
MS 3B-50  
8155 T&B Blvd.  
Memphis, TN 38125

Hours: 7AM - 6PM CDT  
Monday-Friday  
Phone: (888) 862-3289  
Fax: (901) 252-1321  
Email:techsupport@tnb.com