

Fail-safe digital module DM-F PROFIsafe, for fail-safe shutdown via bus/PROFIsafe, Us: 110...240 V AC/DC, 2 relay enabling circuits, 2 relay outputs, 3 inputs, maximum achievable SIL IEC 61508: 3, maximum achievable PL ISO 13849-1: E



Product brand name	SIRIUS
Product designation	Fail-safe digital module
Design of the product	for fail-safe shutdown
Product type designation	DM-FP

General technical data	
• Product function EMERGENCY OFF function	No
• Product function Automatic start	No
• Product function Light barrier monitoring	No
• Product function Light array monitoring	No
• Product function protective door monitoring	No
• Product function magnetically operated switch monitoring NC-NO	No
• Product function magnetically operated switch monitoring NC-NC	No
• Product feature cross-circuit-proof	Yes
• Product function Pressure-sensitive mat monitoring	No
• Product function monitored start-up	No
Product component	

<ul style="list-style-type: none"> • input for thermistor connection 	No
<ul style="list-style-type: none"> • Digital input 	Yes
<ul style="list-style-type: none"> • input for analog temperature sensors 	No
<ul style="list-style-type: none"> • input for ground fault detection 	No
<ul style="list-style-type: none"> • Relay output 	Yes
Apparent power consumption	11 V·A
Consumed active power	5.5 W
Insulation voltage	
<ul style="list-style-type: none"> • with degree of pollution 3 rated value 	300 V
Protection class IP	IP20
Shock resistance	
<ul style="list-style-type: none"> • acc. to IEC 60068-2-27 	15g / 11 ms
Vibration resistance	
<ul style="list-style-type: none"> • acc. to IEC 60068-2-6 	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
Operating frequency maximum	360 1/h
Switching capacity current of the NO contacts of the relay outputs at AC-15	
<ul style="list-style-type: none"> • at 24 V 	3 A
<ul style="list-style-type: none"> • at 120 V 	3 A
<ul style="list-style-type: none"> • at 240 V 	1.5 A
Switching capacity current of the NO contacts of the relay outputs at DC-13	
<ul style="list-style-type: none"> • at 24 V 	4 A
<ul style="list-style-type: none"> • at 60 V 	0.55 A
<ul style="list-style-type: none"> • at 125 V 	0.22 A
<ul style="list-style-type: none"> • at 250 V 	0.11 A
Switching capacity current of relay enabling circuits at AC-15	
<ul style="list-style-type: none"> • at 24 V 	3 A
<ul style="list-style-type: none"> • at 120 V 	3 A
<ul style="list-style-type: none"> • at 240 V 	1.5 A
Switching capacity current of relay enabling circuits at DC-13	
<ul style="list-style-type: none"> • at 24 V 	4 A
<ul style="list-style-type: none"> • at 60 V 	0.55 A
<ul style="list-style-type: none"> • at 125 V 	0.22 A
<ul style="list-style-type: none"> • at 250 V 	0.11 A
Mechanical service life (switching cycles)	
<ul style="list-style-type: none"> • typical 	10 000 000
Electrical endurance (switching cycles)	
<ul style="list-style-type: none"> • typical 	100 000
Buffering time in the event of power failure	200 ms
Recovery time	

<ul style="list-style-type: none"> • after power failure typical 	1 s
Backslide delay time in the event of power failure	
<ul style="list-style-type: none"> • typical 	220 ms
<ul style="list-style-type: none"> • maximum 	320 ms
Reference code acc. to DIN EN 81346-2	F
Reference code acc. to DIN EN 61346-2	F
Continuous current of the NO contacts of the relay outputs	5 A
Type of input characteristic	Type 2 in accordance with EN 61131-2
Certificate of suitability	
<ul style="list-style-type: none"> • according to ATEX directive 2014/34/EU 	BVS 06 ATEX F001
Explosion device group and category according to ATEX directive 2014/34/EU	II (2) G, II (2) D, I (M2)

Electromagnetic compatibility

EMC emitted interference	
<ul style="list-style-type: none"> • acc. to IEC 60947-1 	class A
EMI immunity acc. to IEC 60947-1	corresponds to degree of severity 3
Conducted interference	
<ul style="list-style-type: none"> • due to burst acc. to IEC 61000-4-4 	2 kV network connection / 1 kV control connection
<ul style="list-style-type: none"> • due to conductor-earth surge acc. to IEC 61000-4-5 	2 kV
<ul style="list-style-type: none"> • due to conductor-conductor surge acc. to IEC 61000-4-5 	1 kV
<ul style="list-style-type: none"> • due to high-frequency radiation acc. to IEC 61000-4-6 	10 V
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Conducted HF-interference emissions acc. to CISPR11	corresponds to degree of severity A
Field-bound HF-interference emission acc. to CISPR11	corresponds to degree of severity A

Inputs/ Outputs

Product function	
<ul style="list-style-type: none"> • Parameterizable inputs 	Yes
<ul style="list-style-type: none"> • Parameterizable outputs 	Yes
Number of inputs	4
Design of input	
<ul style="list-style-type: none"> • feedback input 	Yes
Number of digital inputs	3
<ul style="list-style-type: none"> • with a common reference potential 	4
Digital input version	
<ul style="list-style-type: none"> • Type 1 acc. to IEC 61131 	No
<ul style="list-style-type: none"> • Type 2 acc. to IEC 61131 	Yes

Number of analog inputs	0
Number of outputs	2
Number of semiconductor outputs	0
Number of outputs as contact-affected switching element	2
<ul style="list-style-type: none"> • as NO contact — safety-related instantaneous contact 	2
Number of analog outputs	0
Switching behavior	monostable
Property of contacts of the relay outputs	Fail-safe NO contacts
Wire length for digital signals maximum	300 m

Product Function

Suitability for use	
<ul style="list-style-type: none"> • position switch monitoring • EMERGENCY-OFF circuit monitoring • valve monitoring • opto-electronic protection device monitoring • tactile sensor monitoring • magnetically operated switch monitoring • proximity switch monitoring • safety switch • safety-related circuits 	<p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p> <p>No</p>

Communication/ Protocol

<ul style="list-style-type: none"> • Protocol is supported PROFI-safe protocol 	Yes
---	-----

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	screw and snap-on mounting
Height	106 mm
Width	45 mm
Depth	124 mm
Required spacing	
<ul style="list-style-type: none"> • top • bottom • left • right 	<p>40 mm</p> <p>40 mm</p> <p>0 mm</p> <p>0 mm</p>

Connections/ Terminals

Product function	
<ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit 	Yes
Type of electrical connection	
<ul style="list-style-type: none"> • for auxiliary and control current circuit 	screw-type terminals

Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • solid 	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
<ul style="list-style-type: none"> • finely stranded with core end processing 	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
<ul style="list-style-type: none"> • at AWG conductors solid 	1x (20 ... 12), 2x (20 ... 14)
<ul style="list-style-type: none"> • at AWG conductors stranded 	1x (20 ... 14), 2x (20 ... 16)
Tightening torque	
<ul style="list-style-type: none"> • with screw-type terminals 	0.8 ... 1.2 N·m
Tightening torque [lbf·in]	
<ul style="list-style-type: none"> • with screw-type terminals 	7 ... 10.3 lbf·in

Ambient conditions

Installation altitude at height above sea level	
<ul style="list-style-type: none"> • 1 maximum 	2 000 m
<ul style="list-style-type: none"> • 2 maximum 	3 000 m; max. +50 °C (no protective separation)
<ul style="list-style-type: none"> • 3 maximum 	4 000 m; No protective separation at 40 °C
Ambient temperature	
<ul style="list-style-type: none"> • during operation 	-25 ... +60 °C
<ul style="list-style-type: none"> • during storage 	-40 ... +80 °C
<ul style="list-style-type: none"> • during transport 	-40 ... +80 °C
Environmental category	
<ul style="list-style-type: none"> • during operation acc. to IEC 60721 	3K6 (no formation of ice, no condensation, relative humidity 10 ... 95%), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
<ul style="list-style-type: none"> • during storage acc. to IEC 60721 	1K6 (no condensation, relative humidity 10 ... 95%), 1C2 (no salt mist), 1S2 (sand must not get into the devices), 1M4
<ul style="list-style-type: none"> • during transport acc. to IEC 60721 	2K2, 2C1, 2S1, 2M2
Relative humidity	
<ul style="list-style-type: none"> • during operation 	5 ... 95 %
Contact rating of auxiliary contacts according to UL	B300 / R300

Short-circuit protection

Design of short-circuit protection	
<ul style="list-style-type: none"> • per output 	Fuse links: gG 6 A, quick-response 10 A (IEC 60947-5-1), miniature circuit-breaker C char.: 1.6 A (IEC 60947-5-1) or 6 A (I _K < 500 A)
Design of the fuse link	
<ul style="list-style-type: none"> • for short-circuit protection of relay enabling circuits required 	gL/gG: 4 A

Safety related data

Safety device type acc. to IEC 61508-2	Type B
Safety Integrity Level (SIL) acc. to IEC 61508	3
<ul style="list-style-type: none"> • SIL Claim Limit (subsystem) acc. to EN 62061 	3
Performance level (PL)	
<ul style="list-style-type: none"> • acc. to EN ISO 13849-1 	e

Category	
• acc. to EN ISO 13849-1	4
Stop category acc. to DIN EN 60204-1	0
Safe failure fraction (SFF)	99 %
Average diagnostic coverage level (DCavg)	99 %
Failure rate [FIT]	
• at rate of recognizable hazardous failures (λ_{dd})	908.51 FIT
• at rate of non-recognizable hazardous failures (λ_{du})	7.48 FIT
PFDavg with low demand rate acc. to IEC 61508	0.00002
Hardware fault tolerance acc. to IEC 61508	1
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Safe state	Safety outputs switched off
Protection against electrical shock	finger-safe
Contact reliability	0.1 million operating cycles (AC15, 230 V, 2 A)

Response times/ Monitoring times

PROFIsafe monitoring time F-WD-Time	250 ms
Response time	
• in case of failure OFDT	200 ms
• in faultless state WCDDT	150 ms

Galvanic isolation

(electrically) protective separation acc. to IEC 60947-1	All circuits in SIMOCODE pro are with protective separation, i.e. they are designed with doubled creepage paths and clearances. NOTICE: The information in the "Protective Separation" test report, No. 2668, must be observed.
Design of the electrical isolation	Protective separation in accordance with IEC 60947-1 for all circuits, up to installation altitude of 2000 m

Control circuit/ Control

Type of voltage of the control supply voltage	AC/DC
Control supply voltage at AC	
• at 50 Hz rated value	110 ... 240 V
• at 60 Hz rated value	110 ... 240 V
Control supply voltage frequency 1	50 ... 60 Hz
Control supply voltage frequency	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
Control supply voltage at DC	
• rated value	110 ... 240 V
Operating range factor control supply voltage rated value at DC	
• initial value	0.85

• Full-scale value	1.1
Operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• Full-scale value	1.1
Operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	0.85
• Full-scale value	1.1

Certificates/ approvals

General Product Approval	EMC	For use in hazardous locations
---------------------------------	------------	---------------------------------------



For use in hazardous locations	Functional Safety/Safety of Machinery	Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------------------	--	----------------------------------	--------------------------	--------------------------

[Explosion Protection Certificate](#)

[Type Examination Certificate](#)



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other
--------------------------	--------------



[Confirmation](#)

[PROFINET-Certification](#)



Profibus

[PROFIsafe-Certification](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/sirius/catalogs

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7330-1AU00-0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7330-1AU00-0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3UF7330-1AU00-0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UF7330-1AU00-0&lang=en

Test report No. A0258, protective separation

<https://support.industry.siemens.com/cs/ww/en/view/109748152>

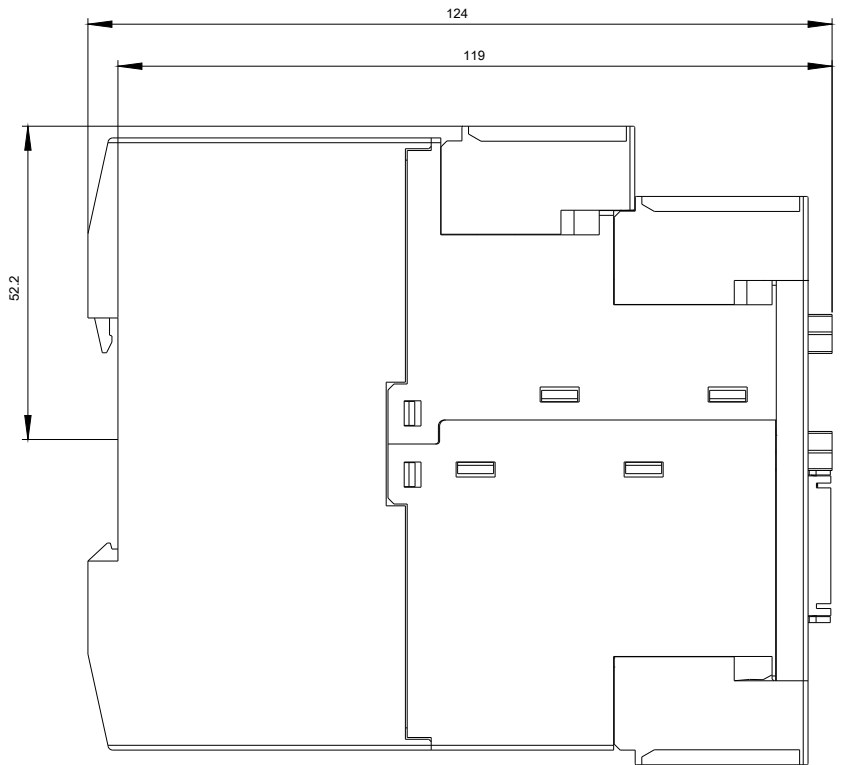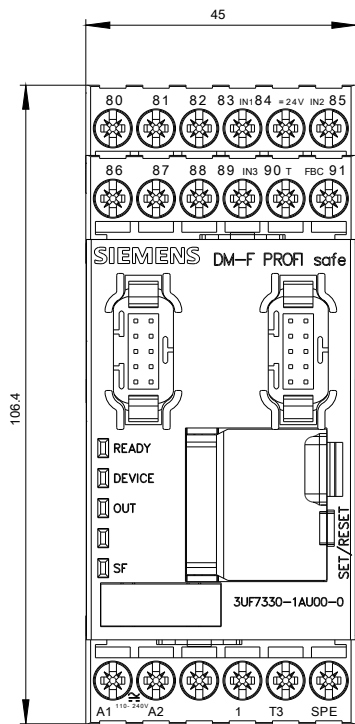

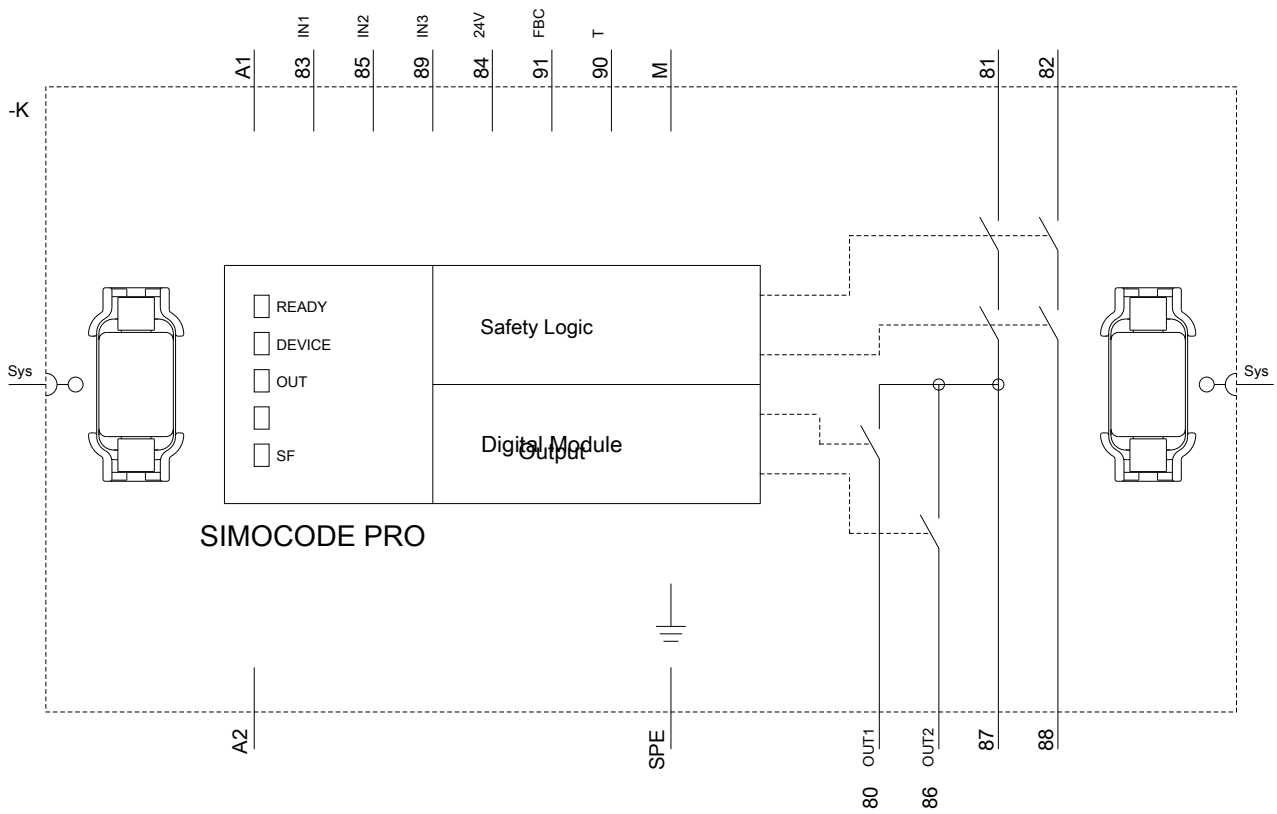

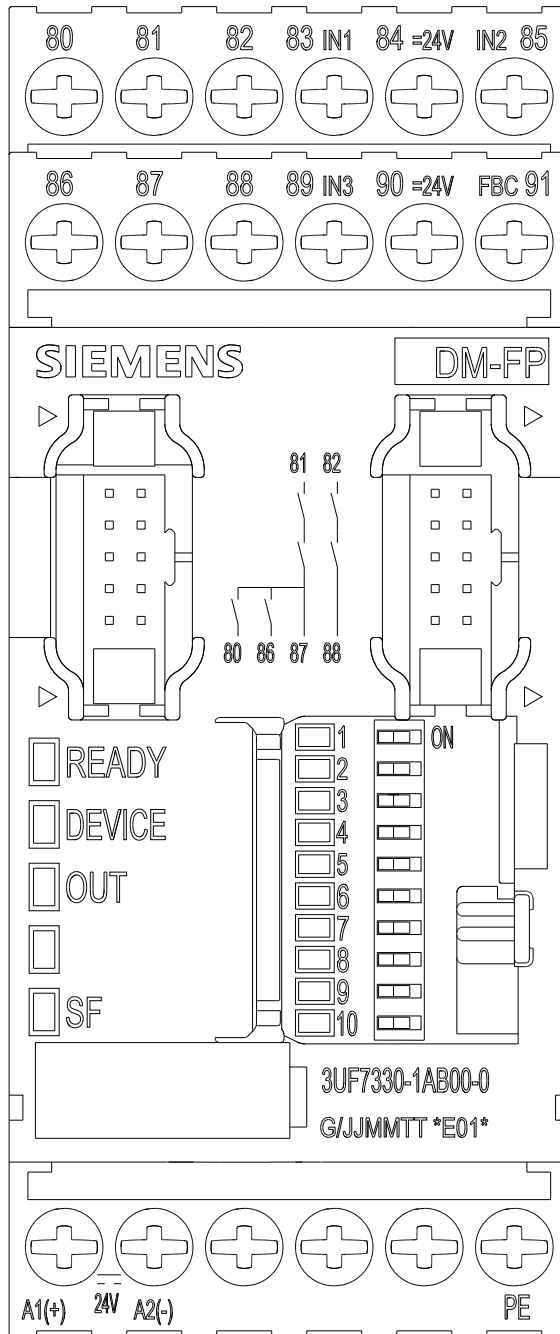

last modified:

11/08/2019