




REAR VIEW

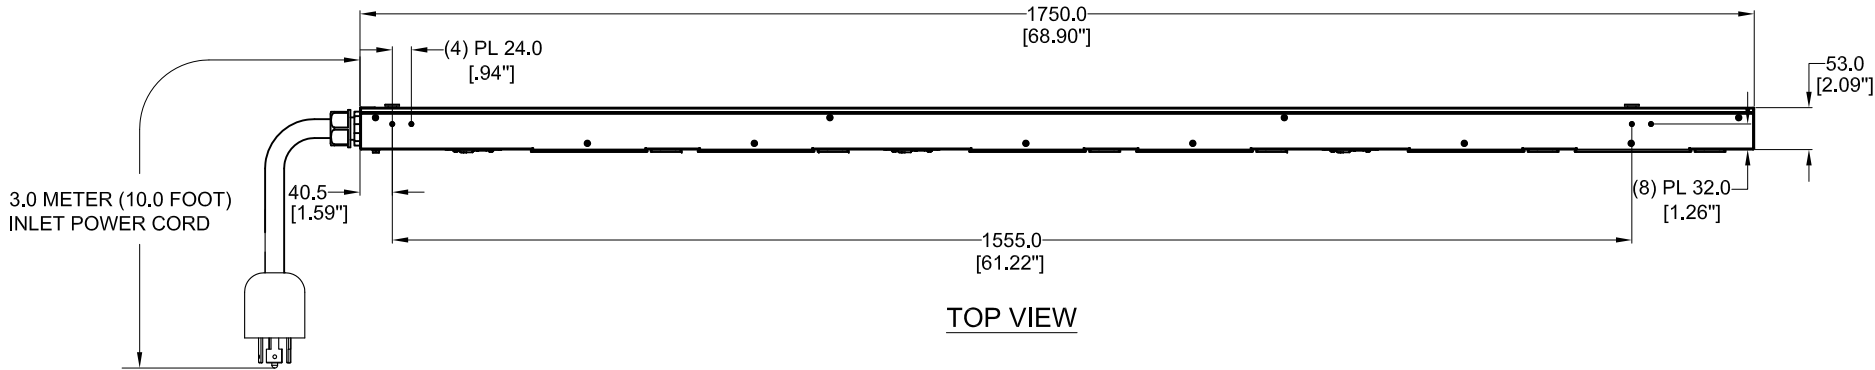


TOP VIEW

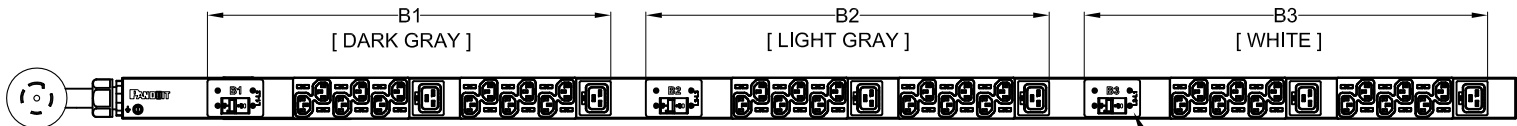

FRONT VIEW



SIDE VIEW

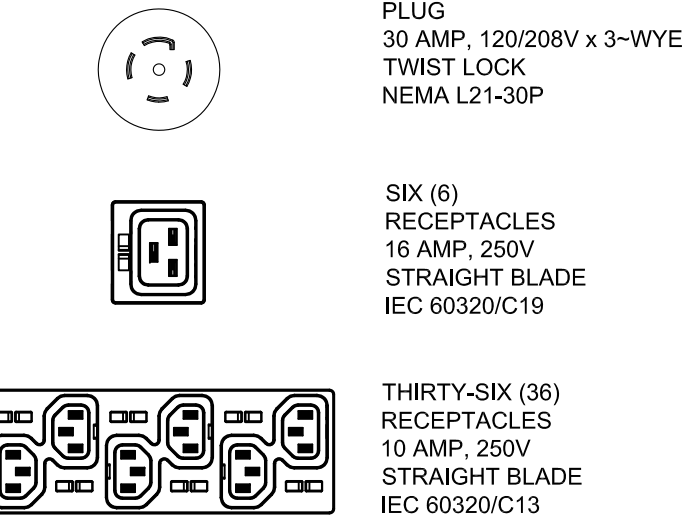

NOTES:

1. IDENTIFICATION:
UNIT TYPE: BASIC
ORIENTATION: VERTICAL, 0U FULL
OUTLET QTY&TYPE: (36) C13, (6) C19
BREAKER QTY&TYPE: (3) 20AMP, DOUBLE-POLE
INPUT VOLTAGE: 100-120/200-240VAC, WYE
INPUT CURRENT: 30A (24A DERATED)
INPUT PHASE: THREE-PHASE WYE
RATED POWER: 8.6kVA
INPUT PLUG: NEMA L21-30P
INPUT CORD LENGTH: 3m [10']
2. ACCESSORIES:
POCKET GUIDE
3. RoHS COMPLIANT
4. VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
5. MAXIMUM ALLOWABLE INPUT POWER = 8.6 kW
6. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE: BASIC SERIES PDU P42B27M CUSTOMER DRAWING			
ITEM REVISION NAME:		PANDUIT	
DATASHEET FILE NAME:		MATERIAL/COLOR: N/A	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		DRAWING NUMBER: P42B27M_DC	
THIRD ANGLE PROJECTION		SCALE: NONE	
DRAWN BY: Hanson		DATE: 05/24/2017	
CHK: SEAN		SCALE: NONE	
REV		SHT 1 OF 1	
DATE		SCALE: B	
BY			
CHK			
APR			
DESCRIPTION		ECN	