



Powering Business Worldwide

pe.eaton.com

DS7 Soft Start Controller

DS7-340SX135N0-N

UPC:786685856766

Dimensions:

- **Height:** 7.01 IN
- **Length:** 8.46 IN
- **Width:** 4.25 IN

Weight:8.16 LB

Notes:No internal radio interference suppression filters

Warranties:


- Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.

Specifications:

- **Bypass:** Internal bypass
- **Circuit Breaker Type:** HKD3350
- **Fuse Size:** 500A class RK5 max
- **Control Voltage:** 24 Vac/Vdc
- **Environmental Rating:** IP20
- **Frame Size:** Frames 3 and 4
- **Horsepower:** 100 hp
- **Phase:** Three-phase mains supply voltage
- **Rated Operational Current:** 135A
- **Series:** Generation 7
- **Voltage Rating:** 480V

Supporting documents:

- [DS7 Series soft start controller](#)
- [DS7 series soft start controllers, Frame 1 \(4-12A\)](#)
- [Eatons Volume 6-Solid-State Motor Control](#)
- [Eaton Specification Sheet - DS7-340SX135N0-N](#)

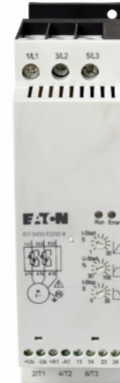

- [Product Datasheet - DS7-340SX135N0-N](#)

Certifications:

- CSA Certified
- IEC 60947-4-2
- EN 60947-4-2
- UL Listed

Product compliance:

- C-Tick Compliant
- CE Marked