

Coupling relay in industrial enclosure 1 changeover contact Wide voltage range 24 V to 240 V AC/DC Screw terminals



Product brand name	SIRIUS
Product designation	Coupling relay in industrial enclosure
Product type designation	3RQ2

General technical data

Consumed active power	4 W
Insulation voltage	
<ul style="list-style-type: none"> for overvoltage category III according to IEC 60664 — with degree of pollution 3 rated value 	300 V
Degree of pollution	3
Surge voltage resistance rated value	4 kV
maximum permissible voltage for safe isolation	
<ul style="list-style-type: none"> between auxiliary and auxiliary circuit between control and auxiliary circuit acc. to IEC 60947-1 	300 V
Protection class IP	IP20
Shock resistance	
<ul style="list-style-type: none"> acc. to IEC 60068-2-27 for railway applications acc. to DIN EN 61373 	11g / 15 ms Category 1, Class B

Vibration resistance	
<ul style="list-style-type: none"> • acc. to IEC 60068-2-6 • for railway applications acc. to DIN EN 61373 	10 ... 55 Hz: 0.35 mm Category 1, Class B
Switching behavior	monostable
Mechanical service life (switching cycles)	
<ul style="list-style-type: none"> • typical 	10 000 000
Electrical endurance (switching cycles)	
<ul style="list-style-type: none"> • at AC-15 at 230 V typical 	100 000
Thermal current of the switching element with contacts maximum	5 A
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	K
Reference code acc. to DIN EN 81346-2	K
Reference code acc. to DIN EN 61346-2	K

Control circuit/ Control

Control supply voltage 1 at AC	
<ul style="list-style-type: none"> • at 50 Hz • at 60 Hz 	24 ... 240 V 24 ... 240 V
Control supply voltage 1	
<ul style="list-style-type: none"> • at DC 	24 ... 240 V
Operating range factor control supply voltage rated value at DC	
<ul style="list-style-type: none"> • initial value • Full-scale value 	0.7 1.1
Operating range factor control supply voltage rated value at AC at 50 Hz	
<ul style="list-style-type: none"> • initial value • Full-scale value 	0.7 1.1
Operating range factor control supply voltage rated value at AC at 60 Hz	
<ul style="list-style-type: none"> • initial value • Full-scale value 	0.7 1.1
Switch-on delay time	
<ul style="list-style-type: none"> • at AC maximum • at DC maximum 	10 ms 10 ms
Off-delay time	100 ms
Design of the relay operating mechanism	poled
Product component Plug-in socket	No

Short-circuit protection

Design of the fuse link	
<ul style="list-style-type: none"> • for short-circuit protection of the auxiliary switch required 	fuse gL/gG: 6 A

Auxiliary circuit	
Material of switching contacts	AgSnO ₂
Number of NC contacts for auxiliary contacts	0
Number of NO contacts for auxiliary contacts	0
Number of CO contacts	
• for auxiliary contacts	1
Contact reliability of auxiliary contacts	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
Type of voltage	AC/DC

Outputs	
Ampacity of the output relay at AC-15	
• at 24 V at 50/60 Hz	3 A
• at 110 V at 50/60 Hz	3 A
• at 250 V at 50/60 Hz	3 A
Ampacity of the output relay at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A

Electromagnetic compatibility	
EMC emitted interference	
• acc. to IEC 60947-1	ambience A (industrial sector)
EMI immunity	
• acc. to IEC 60947-1	corresponds to degree of severity 3
Conducted interference	
• due to burst acc. to IEC 61000-4-4	2 kV
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV (line to ground)
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV (line to line)
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharging, 8 kV air discharging

Safety related data	
Electromagnetic compatibility	IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4

Connections/ Terminals	
Product function	
• removable terminal for auxiliary and control circuit	Yes
Type of electrical connection	screw-type terminals
Type of connectable conductor cross-sections	
• solid	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
• finely stranded with core end processing	1x (0.5 ... 4 mm ²), 2x (0.5 ... 1.5 mm ²)

<ul style="list-style-type: none"> • at AWG conductors solid 	1x (20 ... 12), 2x (20 ... 14)
Connectable conductor cross-section <ul style="list-style-type: none"> • solid • finely stranded with core end processing • finely stranded without core end processing 	0.5 ... 4 mm ² 4 mm ² 0.5 mm ²
AWG number as coded connectable conductor cross section <ul style="list-style-type: none"> • solid • stranded 	12 ... 20 12 ... 20
Tightening torque <ul style="list-style-type: none"> • with screw-type terminals 	0.6 ... 0.8 N·m
Wire stripping length of the cable <ul style="list-style-type: none"> • for auxiliary and control contacts 	10 mm

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
Height	100 mm
Width	22.5 mm
Depth	90 mm

Ambient conditions

Installation altitude at height above sea level <ul style="list-style-type: none"> • maximum 	2 000 m
Relative humidity <ul style="list-style-type: none"> • during operation 	10 ... 95 %

Certificates/ approvals

General Product Approval			EMC	Declaration of Conformity	
					
CCC	CSA	UL		RCM	EG-Konf.

Declaration of Conformity	Test Certificates	other	Railway
Miscellaneous	Type Test Certificates/Test Report	Confirmation	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

www.siemens.com/ic10

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3RQ2000-1AW00>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RQ2000-1AW00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RQ2000-1AW00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RQ2000-1AW00&lang=en

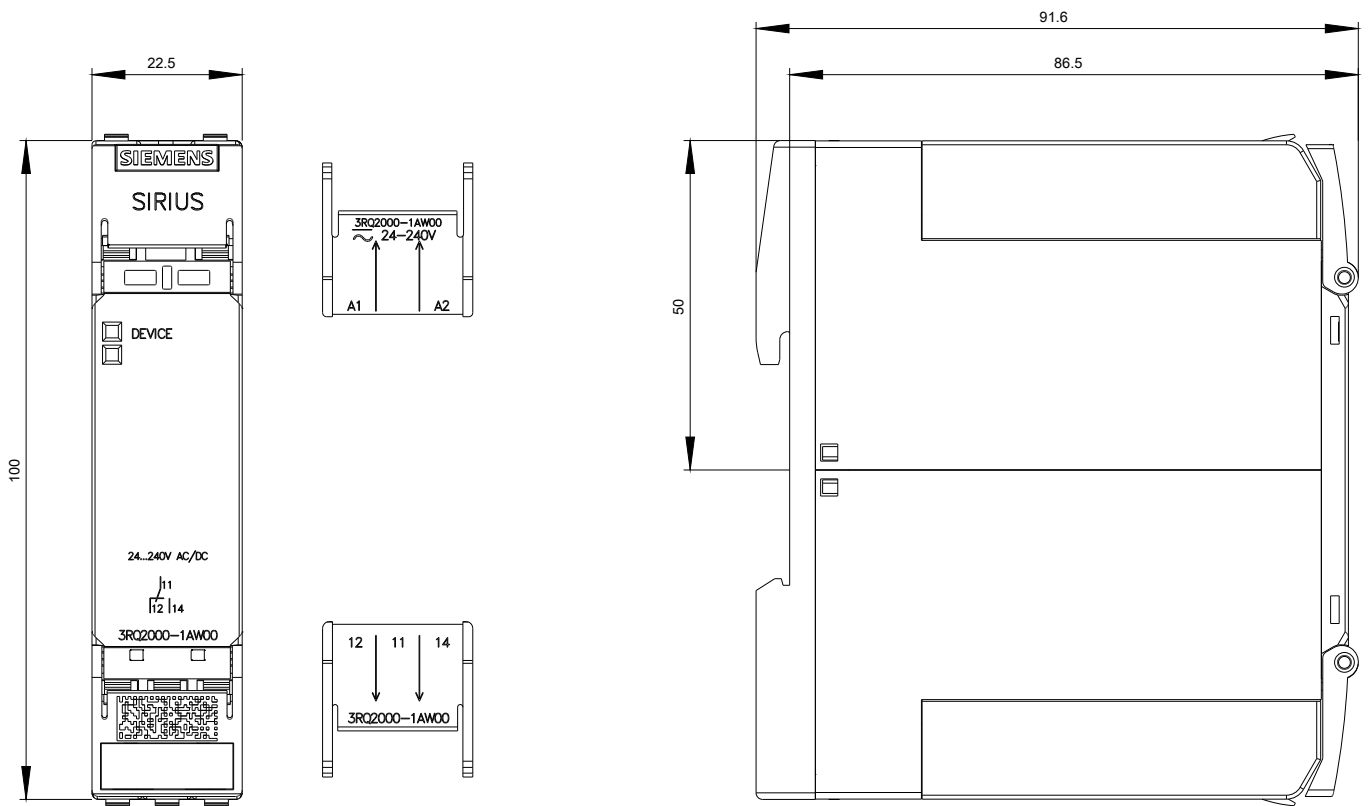

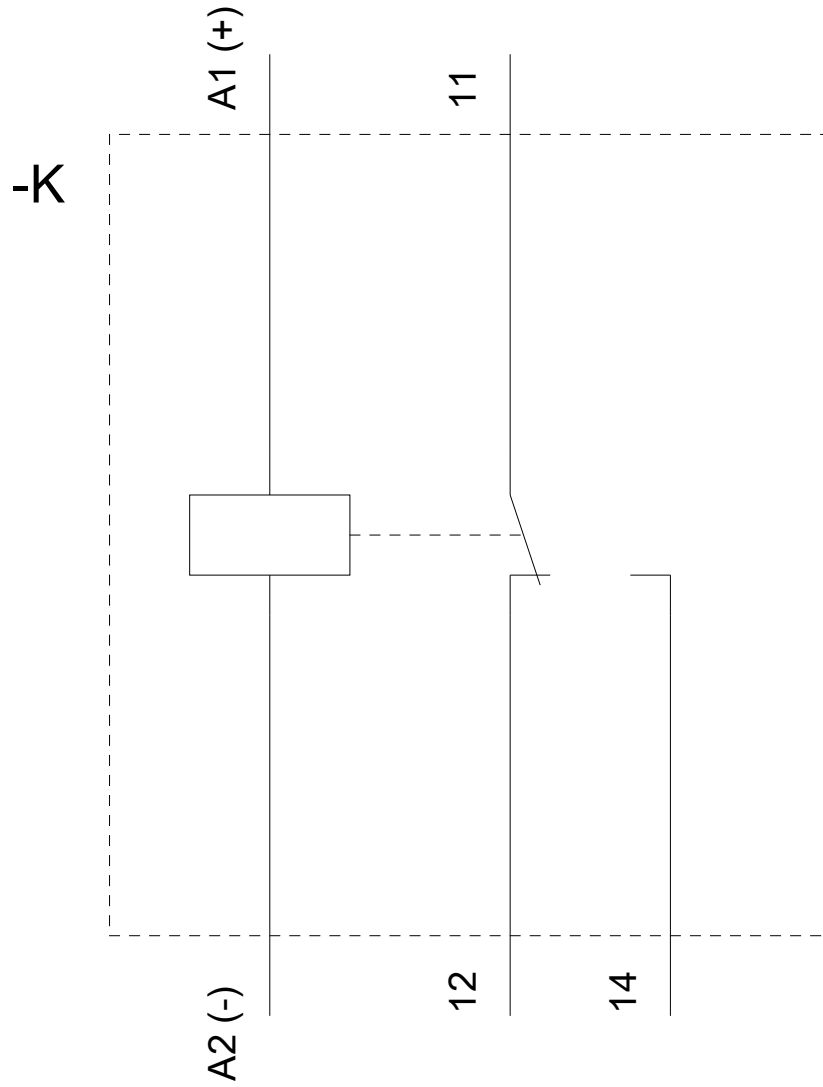

last modified:

03/11/2020