

# E1FX Series Nickel Plated Brass Cable Gland

## Increased Safety and Flameproof

For Armored Cables.

NEC/CEC:  
Class I, Division 2, Groups A, B, C, D

ATEX/IECEX:  
Zone 1 and 2 – 21 and 22  
II 2 GD  
IP66

HAZARDOUS LOCATION FITTINGS: ATEX/IECEX FLAMEPROOF CABLE GLANDS

Appleton

### Applications

- Cable gland for armored cables (braid, tape, tape with lead sheath) certified for enclosures with the following protection modes:
  - Ex d flameproof IIB or IIC (as per §10.4.2 of IEC 60079-14) (Refer to the ATX Guide for Use of Electrical Products in Hazardous Locations)
  - Ex e increased safety
  - Ex nR restricted breathing
  - D dust environment
- Hazardous areas (gas and dust)
- Onshore and offshore

### Features

- Cable gland with elastomer seal for use in hazardous areas with braided and tape armor cable.
- The cable gland allows mechanical cable retention and earth continuity via cable armor termination.
- A detachable armor cone and AnyWay clamping ring arrangement facilitates remote make off and enables cable to be disconnected from the equipment.
- Inspection of the armor can be carried out while still maintaining the explosionproof protection mode of the enclosure.

### Standard Materials

- Body: nickel plated brass
- Seal: LSF (Low Smoke Fume) thermoplastic elastomer
  - Inner displacement seal and LRS (Load Retention seal) outer seal

### Options

- Lead sheath version – Replace digit 1 with 2; Example: 32E1FX5 - 32E2FX5
- Copper-free aluminum: replace last digit 5 with 1
- Shroud, locknut, earth tag, entry thread seal, serrated washers, adaptors and reducers: see *Cable Gland Accessories* pages.

### NEC/CEC Certifications and Compliances

- cCSAus Certified: 101909

Cable Gland Size	Metric Thread C	Catalog Numbers				
		Standard Metric ①	Standard NPT C	Standard NPT ①	Optional NPT C	Optional NPT Thread ①
20S16	M20	2016E1FX5	1/2	2016E1FX0505	3/4	2016E1FX0755
20S	M20	20SE1FX5	1/2	20SE1FX0505	3/4	20SE1FX0755
20	M20	20E1FX5	1/2	20E1FX0505	3/4	20E1FX0755
25S	M25	25SE1FX5	3/4	25SE1FX0755	1	25SE1FX1005
25	M25	25E1FX5	3/4	25E1FX0755	1	25E1FX1005
32	M32	32E1FX5	1	32E1FX1005	1-1/4	32E1FX1255
40	M40	40E1FX5	1-1/4	40E1FX1255	1-1/2	40E1FX1505
50S	M50	50SE1FX5	1-1/2	50SE1FX1505	2	50SE1FX2005
50	M50	50E1FX5	2	50E1FX2005	2-1/2	50E1FX2505
63S	M63	63SE1FX5	2	63SE1FX2005	2-1/2	63SE1FX2505
63	M63	63E1FX5	2-1/2	63E1FX2505	3	63E1FX3005
75S	M75	75SE1FX5	2-1/2	75SE1FX2505	3	75SE1FX3005
75	M75	75E1FX5	3	75E1FX3005	3-1/2	75E1FX3505
90	M90	90E1FX5	3	90E1FX3005	3-1/2	90E1FX3505
100	M100	100E1FX5	4	100E1FX4005	5	100E1FX5005
115	M115	115E1FX5	4	115E1FX4005	5	115E1FX5005
130	M130	130E1FX5	5	130E1FX5005	6	130E1FX6005

① Entry thread seal not supplied, see *Cable Gland Accessories and Tools*.

# E1FX Series Nickel Plated Brass Cable Gland

## Increased Safety and Flameproof

For Armored Cables.

NEC/CEC:  
Class I, Division 2, Groups A, B, C, D

ATEX/IECEX:  
Zone 1 and 2 – 21 and 22  
II 2 GD  
IP66

### ATEX/IECEX Certifications and Compliances

- Certification Type E1FX/Z - E2FX/Z
  - Gas: Zones 1 and 2
  - Type of Protection: Ex d IIC Gb, Ex e IIC Gb, Ex nR IIC Gc
  - Dust: Zone 20
  - Type of Protection: Ex ta IIIC Da
- Conforming to ATEX 94/9/CE: II 2G 3G 1D
- Ambient Temperature: -60 °C to +130 °C (-76 °F to +266 °F)
- CE Declaration of Conformity: DC07001
- ATEX Certificate: Sira 13ATEX1071X, Sira 13ATEX4077X
- IECEx Certificate: IECEx SIR 13.0026X, IECEx SIM 14.0007X
- Other Certifications: KCC, CCOE/PESO (India)
- Marine Approval: LLOYDS, DNV, ABS
- Index of Protection according EN/IEC 60529: IP66
- Deluge Protection Compliance: DTS01:91 (option available on request only)

### INMETRO Certification


- INMETRO Certificate: TUV 12.0618X

### EURASEC Certification

- TC RU C-GB.Г505.B.00138



Dimensions in Millimeters (Inches)

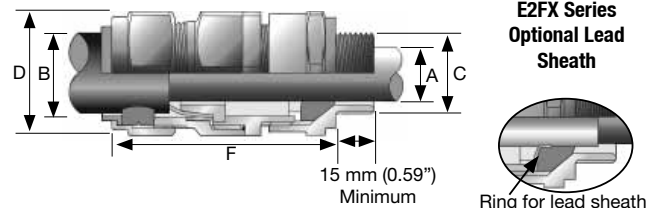

Cable Gland Size	Cable Bedding Diameter mm (in) A		Overall Cable Diameter mm (in) B		Across Corners mm (in) D	Across Flats mm (in) D	Nominal Protrusion Length mm (in) F	Optional PVC Shroud	Weight kg (oz)
	Min	Max	Min	Max					
20S16	3.1 (0.12)	8.6 (0.34)	6.1 (0.24)	13.2 (0.52)	26.4 (1.04)	24.0 (0.94)	58.5 (2.30)	PVC04	0.16 (5.64)
20S	6.1 (0.24)	11.6 (0.46)	9.5 (0.37)	15.9 (0.63)	26.4 (1.04)	24.0 (0.94)	58.5 (2.30)	PVC04	0.16 (5.64)
20	6.5 (0.26)	13.9 (0.55)	12.5 (0.49)	20.9 (0.82)	33.6 (1.32)	30.5 (1.20)	60.5 (2.38)	PVC06	0.21 (7.41)
25S	11.1 (0.44)	19.9 (0.78)	14.0 (0.55)	22.0 (0.87)	41.3 (1.63)	37.5 (1.48)	67.5 (2.66)	PVC09	0.33 (11.64)
25	11.1 (0.44)	19.9 (0.78)	18.2 (0.72)	26.2 (1.03)	41.3 (1.63)	37.5 (1.48)	67.5 (2.66)	PVC09	0.33 (11.64)
32	17.0 (0.67)	26.2 (1.03)	23.7 (0.93)	33.9 (1.33)	50.6 (1.99)	46.0 (1.81)	69.5 (2.74)	PVC11	0.46 (16.23)
40	22.0 (0.87)	32.1 (1.26)	27.9 (1.10)	40.4 (1.59)	60.5 (2.38)	55.0 (2.17)	78.0 (3.07)	PVC15	0.67 (23.63)
50S	29.5 (1.16)	38.1 (1.50)	35.2 (1.39)	46.7 (1.84)	66.0 (2.60)	60.0 (2.36)	75.5 (2.97)	PVC18	0.76 (26.81)
50	35.6 (1.40)	44.0 (1.73)	40.4 (1.59)	53.1 (2.09)	77.0 (3.03)	70.0 (2.76)	80.5 (3.17)	PVC21	0.78 (27.51)
63S	40.1 (1.58)	49.9 (1.96)	45.6 (1.80)	59.4 (2.34)	82.5 (3.25)	75.0 (2.95)	91.5 (3.60)	PVC23	1.37 (48.33)
63	47.2 (1.86)	55.9 (2.20)	54.6 (2.15)	65.9 (2.59)	88.0 (3.46)	80.0 (3.15)	92.0 (3.62)	PVC25	1.47 (51.85)
75S	52.8 (2.08)	61.9 (2.44)	59.0 (2.32)	72.1 (2.84)	97.9 (3.85)	89.0 (3.50)	99.0 (3.90)	PVC28	2.12 (74.78)
75	59.1 (2.33)	67.9 (2.67)	66.7 (2.63)	78.5 (3.09)	108.9 (4.29)	99.0 (3.90)	102.0 (4.02)	PVC30	2.69 (94.89)
90	66.6 (2.62)	79.9 (3.15)	76.2 (3.00)	90.4 (3.56)	125.4 (4.94)	114.0 (4.49)	120.0 (4.72)	PVC32	4.28 (150.97)
100	76.0 (2.99)	90.9 (3.58)	86.1 (3.39)	101.5 (4.00)	135.3 (5.33)	123.0 (4.84)	148.0 (5.83)	LSF33	4.67 (164.73)
115	86.0 (3.39)	97.9 (3.85)	101.5 (4.00)	110.3 (4.34)	146.7 (5.78)	133.4 (5.25)	169.0 (6.65)	LSF34	7.09 (250.09)
130	97.0 (3.82)	114.9 (4.52)	114.2 (4.5)	123.3 (4.85)	160.7 (6.33)	146.1 (5.75)	183.0 (7.20)	LSF35	8.38 (295.6)