


4

3


2

1

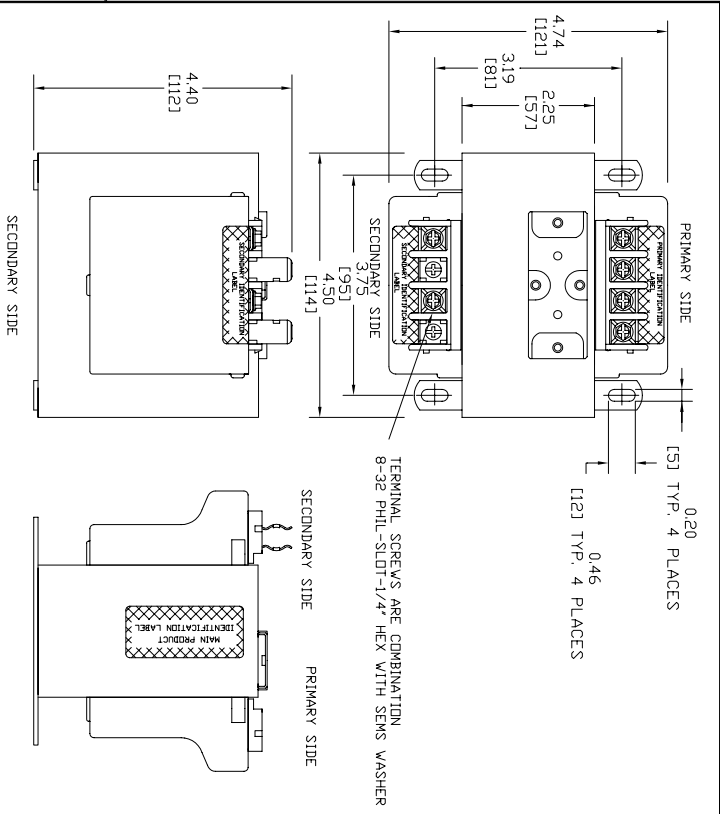


Transformer Specifications	
PRIMARY VOLTAGE(S)	230/460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	300
RATED FREQUENCY	50/60
INSULATION CLASS	190
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	110 LBS

TEST REQUIREMENTS	
WINDING	H4-H3 H2-H1 X2-X1
D.C. VOLTS	240 240 127.5
L.D.D. VOLTS	240 240 120
F.L. AMPS	0.768 0.768 2.500
HI-POT	4800V 3000V
EXCITING AMPS	0.28AMPS @ 240 VOLTS, 50HZ
EXCITING WATTS	24.5 MAX



NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

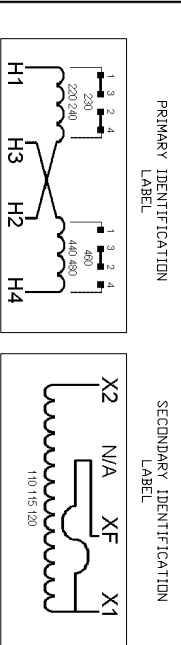

Calfe-Hornum INDUSTRIAL CONTROL TRANSFORMER

CAT. NO. C0300E2A

300VA 50/60Hz

TEMP CL. 130°C

SERIES 2

35082

B300-2108-1F

1	REVISION DT1109
UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES	
ONE PLACE DEC	40.1
TWO PLACE DEC	4.02
THREE PLACE DEC	0.402
ANGLES ONE DEC	40.9
VOLUME	45%
AMPERAGE	4.2%
FORCE/TORQUE/SPEED	±10%
TEMPERATURE	±3.3/FAH
DIMENSIONS TO BE INTERPRETED IN ACCORDANCE WITH	ASME Y14.5M-1994
(XXX) SYMBOL DEFINITIONS	SEE DRAWING 60672
(S) FOR DRAWING 60672	
(H) HARD ANGLE INDICATION	
DATE	11/06/08
DRAWER/DESIGNER	S. CASTRO
APPD	APPD
E-ROBLES	DATE 11/06/08
APPD	DATE 11/06/08
C.CASTORENA	ENGR REF
ENGR REF	
TITLE	MTE CONTROL TRANSFORMER 300 VA SERIES 2
SIZE	B
SCALE	C0300E2A.DWG
PARTS LIST	DWG NO C0300E2A
PRODUCT CODE	1 OF 1