

Specialty Fans and Fan/Lights—Utility Fans



Powerful solutions for problem rooms.


Eliminate humidity or tobacco smoke from recreation rooms, workshops, or cooking odors from kitchens with these powerful utility ventilators. Aluminum filters are available for most models. All feature powerful, permanently lubricated motors and rugged steel housings. Paint the low-profile white polymeric grilles to match any décor.

Chain-Operated utility fan

- Pull-chain opens the door and starts fan
- Housing adjusts to fit walls from 4-1/2" – 9-1/2" thick
- Specially designed polymeric fan blade
- Housing features foam-insulated door for energy efficiency



Model 506
• 10" Wall Fan

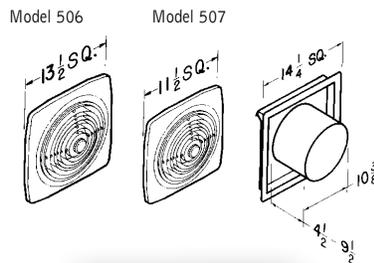


Model 507
• 8" Wall Fan (8-3/8" diameter sleeve)



Room-to-Room

- Room-to-Room ventilators provide quick solutions where more ventilation is needed – without installing new ductwork
- Built-in variable speed control
- Easy installation through wall 3" – 5-1/2" thick
- Permanently lubricated motor
- Paintable white polymeric grilles



Model 510
• 10" Room-to-Room fan
• Not for use in kitchens



Model 511 (shown)
• 8" Room-to-Room fan
• Not for use in kitchens

Wall/Ceiling Mount – Side Discharge

- Installs easily between ceiling joists or wall studs
- Built-in damper prevents backdrafts
- Fits 3-1/4" x 10" duct

Model 502 (shown)
• 10" Side Discharge

Model 503
• 8" Side Discharge



	CFM	Sones	Diameter	Sizing Specifications
Wall/Ceiling-Mount, Side Discharge				
502	270	8.0	10"	Fits 3-1/4" x 10" duct
503	160	5.0	8"	Fits 3-1/4" x 10" duct
Chain-Operated				
506	470	8.0	10"	Fits 4-1/2" – 9-1/2" thick walls
507	250	7.0	8"	Fits 4-1/2" – 9-1/2" thick walls
Room-to-Room				
510	380	6.5	10"	Fits 3" – 5-1/2" thick walls
511	180	4.5	8"	Fits 3" – 5-1/2" thick walls