

Scratch Awls

Cushion-Grip Scratch Awl

- Professional, heavy-duty, hard-pointed awl
- Scribes metal, starts screw holes, performs a variety of piercing and punching jobs
- Rigid, chrome-plated, heat-treated, tempered-steel shank has full reinforcing bolster at handle for extra strength and impact reinforcement
- Cat. No. 650DD has plated metal strike cap to protect handle from hammer blows and is engineered, manufactured and tested for prying, chiseling and punching



Cat. No. 650 only



650DD

Cat. No.	Shank Length	Overall Length	Weight
650	3.5" (88.9 mm)	7.875" (200 mm)	0.25 lb (0.11 kg)
650DD	3.5" (88.9 mm)	7.875" (200 mm)	0.30 lb (0.14 kg)

Steel Scratch Awl

- One-piece forged-steel blade and bolstered shank
- Heat-treated for long life
- Well-balanced for top efficiency during use
- Black finish for rust resistance



66385

Cat. No.	Overall Length	Shank Length	Weight
66385	7" (177.8 mm)	3.5" (88.9 mm)	0.30 lb (0.14 kg)

Conduit Reamers

Conduit-Fitting and Reaming Screwdriver

- Hooded-blade design keeps tip from slipping out of screws, especially when tightening hard-to-reach conduit fittings. Thicker hood is designed for rugged use
- Reams both the inside and outside of the conduit at the same time
- 5/16" (8 mm) screwdriver tip with 2-1/2" (64 mm) long shank
- Longer Cushion-Grip handle provides comfort and more torque for reaming
- Replaceable reaming blade is now held in place with a 1/6" (1.5 mm) set screw



85191

Cat. No.	Conduit Size	Overall Length	Weight
85191	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	7.5" (190.5 mm)	0.50 lb (0.23 kg)




CONDUIT REAMER
REPLACEMENT BLADE, 2pk
19353

Conduit Reamer

- Locks onto screwdrivers; reams and smooths thin-wall conduit
- Reams ID and OD at the same time
- Two set-screws for round- and square-shank screwdrivers
- Fits up to 3/8" (10 mm) keystone-tip screwdrivers
- NOT for use on power tools

Cat. No.	Conduit Size	Overall Length	Weight
19352	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	6.75" (171.5 mm)	0.20 lb (0.09 kg)

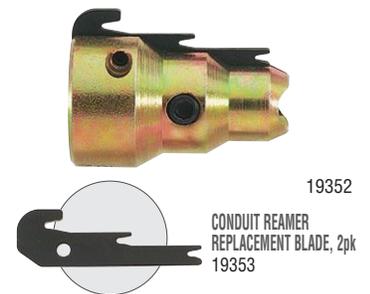

19352

CONDUIT REAMER
REPLACEMENT BLADE, 2pk
19353

Power Conduit Reamer

IMPACT RATED!

- Ream conduit and install fittings in a fraction of the time
- Designed to fit into power drill chucks and quick release adapters; impact ready
- Replacement blades are available and the only approved blade for use in this tool
- Replacement bits are available but any standard 1/4" hex bit will work

Precision engineered
replaceable reaming blade

1/4" hex
quick connect



85091

4x Stronger
Bit Retention



CONDUIT REAMER
REPLACEMENT BLADE, 2pk
19353



NOTE: Read and follow safety instructions in power tool owner's manual.

Cat. No.	Conduit Size	Overall Length	Weight
85091	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	5.75" (146.1 mm)	0.33 lb (0.15 kg)


See page 297 for additional information on warnings.




Conduit Tools

Conduit Locknut and Reaming Pliers

- Tightens 1/2" (13 mm) and 3/4" (19 mm) EMT or 1/2" (13 mm) rigid locknuts
- Fits liquid tight fittings and caps
- Reams and deburrs both inside and outside of conduit
- Knurled jaws at nose tip pull wire or fish tape
- Machined nose fits snugly into locknut wings

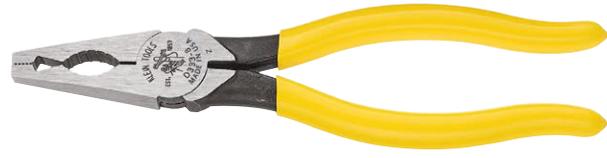

D333-8



Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Point Diameter	Handle Color	Handle Finish	Overall Length	Weight
D333-8	1.625" (41.3 mm)	0.938" (23.8 mm)	1/2" (12.7 mm)	3/16" (4.8 mm)	Yellow	Plastic-Dipped	7.75" (196.9 mm)	0.55 lb (0.25 kg)

Conduit-Fitting and Reaming Screwdriver

- Hooded-blade design keeps tip from slipping out of screws, especially when tightening hard-to-reach conduit fittings. Thicker hood is designed for rugged use
- Reams both the inside and outside of the conduit at the same time
- 5/16" (8 mm) screwdriver tip with 2-1/2" (64 mm) long shank
- Longer Cushion-Grip handle provides comfort and more torque for reaming
- Replaceable reaming blade is now held in place with a 1/6" (1.5 mm) set screw



85191

Cat. No.	Conduit Size	Overall Length	Weight
85191	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	7.5" (190.5 mm)	0.50 lb (0.23 kg)



19353
CONDUIT REAMER
REPLACEMENT BLADE, 2pk

Conduit Reamer

- Locks onto screwdrivers; reams and smooths thin-wall conduit
- Reams ID and OD at the same time
- Two set-screws for round- and square-shank screwdrivers
- Fits up to 3/8" (10 mm) keystone-tip screwdrivers
- NOT for use on power tools



19352

Cat. No.	Conduit Size	Overall Length	Weight
19352	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	6.75" (171.5 mm)	0.20 lb (0.09 kg)



19353
CONDUIT REAMER
REPLACEMENT BLADE, 2pk

Power Conduit Reamer

IMPACT RATED!

- Ream conduit and install fittings in a fraction of the time
- Designed to fit into power drill chucks and quick release adapters; impact ready
- Replacement blades are available and the only approved blade for use in this tool
- Replacement bits are available but any standard 1/4" hex bit will work

Precision engineered
replaceable reaming blade

1/4" hex
quick connect



85091

4x Stronger
Bit Retention



NOTE: Read and follow safety instructions in power tool owner's manual.

Cat. No.	Conduit Size	Overall Length	Weight
85091	1/2" (12.7 mm), 3/4" (19.1 mm), 1" (25.4 mm)	5.75" (146.1 mm)	0.33 lb (0.15 kg)



19353
CONDUIT REAMER
REPLACEMENT BLADE, 2pk

