


M12 Field Attachable Connectors

RSC | RKC




Male, 3-, 4-, 5-, and 8-Pole

Field attachable connector, M12 male connector, 3-, 4-, 5-, and 8-pole with threaded joint, assembling with screw terminals.

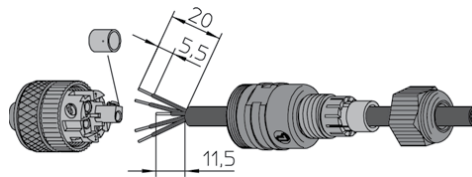

RSC

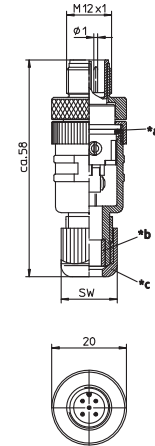


*a O-Ring
*b gasket
*c cap nut




Female, 3-, 4-, 5-, and 8-Pole

Field attachable connector, M12 female connector, 3-, 4-, 5-, and 8-pole with threaded joint, assembling with screw terminals.

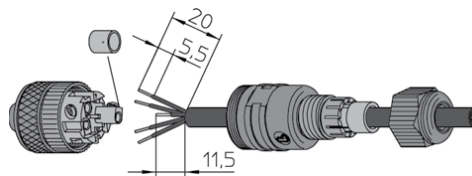

RKC

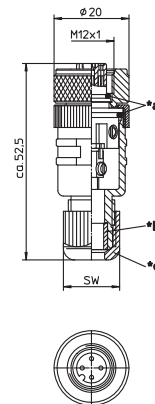


*a O-Ring
*b gasket
*c cap nut


Pin Assignments

Face Views / M12, Male / Female


3 pole




4 pole



5 pole



8 pole





Be Certain with Belden

M12 Field Attachable Connectors

RSC | RKC

Technical Data

Environmental

Degree of protection	IP 67 / NEMA 6P
Operating temperature range	-25°C (-13°F) / +90°C (+194°F)


Mechanical

Housing / Molded body	PBT
Insert	PBT
Contact	CuZn, pre-coppered, CuSnZn 8-poles pre-nickel, gold-plated
Receptacle shell	CuZn, nickel-plated
O-ring	FKM
Mode of connection	Screw terminals
Connectable conductor	3-5 poles max. 0.75 mm ² 8 poles max. 0.50 mm ²

Electrical

Contact resistance	≤ 5 mΩ
Nominal current at 40°C	3-5 poles 4 A 8 poles 2 A
Nominal voltage	3-4 poles 240 V 5 poles 60 V 8 poles 30 V
Rated voltage	3-4 poles 250 V 5 poles 63 V 8 poles 36 V
Test voltage	3-4 poles 2.0 kV eff. / 60 s 5 poles 1.5 kV eff. / 60 s 8 poles 0.9 kV eff. / 60 s
Insulation resistance	> 10 ⁹ Ω
Pollution degree	3

Part Number		Pins	Cable Diameter Range	Characteristics
Male	Female			
RSC 3/7	RKC 3/7	3	Ø 3.0-6.5 mm /SW 15	 
RSC 3/9	RKC 3/9		Ø 4.0-8.0 mm /SW 19	 
RSC 4/7	RKC 4/7	4	Ø 3.0-6.5 mm /SW 15	 
RSC 4/9	RKC 4/9		Ø 4.0-8.0 mm /SW 19	 
RSC 5/7	RKC 5/7	5	Ø 3.0-6.5 mm /SW 15	 
RSC 5/9	RKC 5/9		Ø 4.0-8.0 mm /SW 19	 
RSC 8/9	RKC 8/9	8	Ø 4.0-8.0 mm /SW 19	



Part Number Index

Part Number	Page No.	Part Number	Page No.	Part Number	Page No.
RSC 501/13.5	330-331	RSELP 4	274-275	RSF 80M-698/1F	290-291
RSC 501/16	330-331	RSELP 5	274-275	RSF 8-1/2-14/0.5M	258-259
RSC 8/9	304-305	RSEM 8	242-243	RSF 8-S3103/0.5 M	256-257
RSC 190/9	332-333	RSEQ 5	272-273	RSF 90M-623/1F	292-293
RSC-F-120/13.5	332-333	RSF 20/11-03	280-281	RSF 100M-699/1F	292-293
RSCN 4/7	312-313	RSF 20/13.5-03	280-281	RSF 120M-624/1F	292-293
RSCN 4/9	312-313	RSF 20-603/1F	286-287	RSF 120M-630/0.3M	294-295
RSCN 4/DUO	318-319	RSF 20-678/1F	282-283	RSF 120M-676/1F	296-297
RSCN 5/7	312-313	RSF 3 U/1F	276-277	RSF 190M-669/1F	296-297
RSCN 5/9	312-313	RSF 3/0.5M	254-255	RSFM 3	250-251
RSCN 8/9	312-313	RSF 30/11-01	280-281	RSFM 3/0.5 M	260-261
RSCQ 3/7	310-311	RSF 30/11-05	280-281	RSFM 3/20/0.5 M	262-263
RSCQ 3/9	310-311	RSF 30/13.5-01	280-281	RSFM 4	250-251
RSCQ 4/7	310-311	RSF 30/13.5-05	280-281	RSFM 4/0.5 M	260-261
RSCQ 4/9	310-311	RSF 30-601/0.3M	288-289	RSFM 4/20/0.5 M	262-263
RSCQS 3/9	322-323	RSF 30-638/1F	282-283	RSFM 5	250-251
RSCQS 4/9	322-323	RSF 30-641/1F	284-285	RSFM 5/0.5 M	260-261
RSCS 4/9	320-321	RSF 30-695/1F	286-287	RSFM 8/0.5 M	260-261
RSCS 5/9	320-321	RSF 3-1/2-14/0.5M	258-259	RSFPM 3/0,5 M	264-265
RSCS 8/9	320-321	RSF 3-S3103/0.5 M	256-257	RSFPM 4/0,5 M	264-265
RSCW 3/7	306-307	RSF 4 U/1F	276-277	RSFPM 5/0,5 M	264-265
RSCW 3/9	306-307	RSF 4/0.5M	254-255	RSFPM 8/0,5 M	264-265
RSCW 3U/7	326-327	RSF 40/11-02	280-281	RSHL 4/S 5.5	248-249
RSCW 3U/9	326-327	RSF 40/13.5-02	280-281	RSHL 5/S 5.5	248-249
RSCW 4/7	306-307	RSF 40-639/1F	282-283	RSHL 8/S 5,5	248-249
RSCW 4/9	306-307	RSF 40-693/1F	286-287	RSKF 11	237
RSCW 5/7	306-307	RSF 4-1/2-14/0.5M	258-259	RSKF 13,5	237
RSCW 5/9	306-307	RSF 4-S3103/0.5 M	256-257	RSKF 8	237
RSCW 8/9	306-307	RSF 5 TB	270-271	RSKF 9	237
RSCWN 4/7	314-315	RSF 5 U/1F	276-277	RSKFM 16	237
RSCWN 4/9	314-315	RSF 5/0.5M	254-255	RSKFM 20	237
RSCWN 5/7	314-315	RSF 50/11-04	280-281	RSM 8-354/2 M	62-63
RSCWN 5/9	314-315	RSF 50/13.5-04	280-281	RSM 8-354/5 M	62-63
RSE 3 U	278-279	RSF 50-642/1F	284-285	RSM 8-354/10 M	62-63
RSE 4	272-273	RSF 50-677/1F	282-283	RSMC 3	298-299
RSE 4 L	272-273	RSF 50-694/1F	286-287	RSMC 4	298-299
RSE 4 U	278-279	RSF 5-1/2-14/0.5M	258-259	RSMCK 3	302-303
RSE 5	272-273	RSF 5-S3103/0.5 M	256-257	RSMCK 4	302-303
RSE 5 U	278-279	RSF 60A-697/1F	282-283	RSMCW 3	300-301
RSEL 4	274-275	RSF 60B-696/1F	290-291	RSMCW 4	300-301
RSEL 5	274-275	RSF 70M-622/1F	290-291	RSME 3	240-241
RSEL 8	274-275	RSF 8/0.5M	254-255	RSMEB 3	244-245