


Wiring Devices - Series 60309 Pin and Sleeve

Plugs ■ 20A - 30A ■ Watertight

Plugs 20 Amp

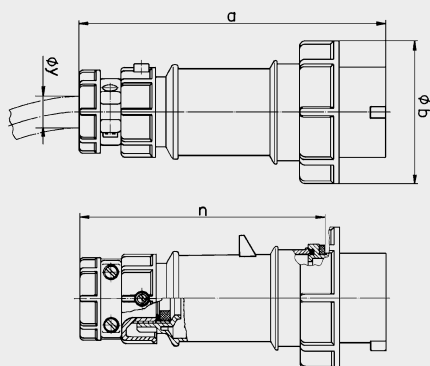


Wire Configuration	Voltage	Catalog Number
2 Pole 3 Wire	125	ME 320P4W
	250	ME 320P6W
	480	ME 320P7W
3 Pole 4 Wire	125/250	ME 420P12W
	3Ø250	ME 420P9W
	380/415	ME 420P6W
	3Ø480	ME 420P7W
	3Ø600	ME 420P5W
4 Pole 5 Wire	3ØY120/208	ME 520P9W
	200/346 / 240/415	ME 520P6W
	3ØY277/480	ME 520P7W
	3ØY347/600	ME 520P5W

Approximate Dimensions (in inches)

	Wire Configuration		
	2 Pole, 3 Wire	3 Pole, 4 Wire	4 Pole, 5 Wire
a	6.40	6.69	7.28
b	2.76	3.07	3.47
n	4.96	5.26	5.97
y			
Cord Diameter	.36-.76	.36-.76	.45-.94
Threaded Entry (NPT)	3/4	3/4	1

Plugs 30 Amp

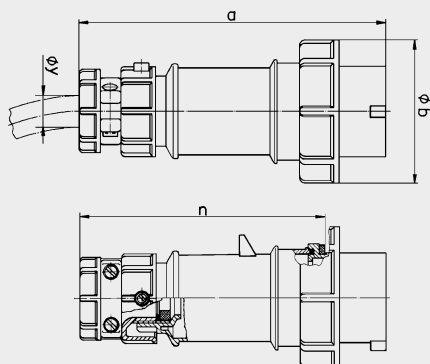

Wire Configuration	Voltage	Catalog Number
2 Pole 3 Wire	125	ME 330P4W
	250	ME 330P6W
	480	ME 330P7W
3 Pole 4 Wire	125/250	ME 430P12W
	3Ø250	ME 430P9W
	380/415	ME 430P6W
	3Ø480	ME 430P7W
	3Ø600	ME 430P5W
4 Pole 5 Wire	3ØY120/208	ME 530P9W
	200/346 / 240/415	ME 530P6W
	3ØY277/480	ME 530P7W
	3ØY347/600	ME 530P5W

Approximate Dimensions (in inches)

	Wire Configuration		
	2 Pole, 3 Wire	3 Pole, 4 Wire	4 Pole, 5 Wire
a	7.80	7.80	8.43
b	3.70	3.70	3.98
n	6.14	6.14	6.77
y			
Cord Diameter	.43-.94	.43-.94	.43-1.12
Threaded Entry (NPT)	1	1	1 1/4