

### Power Xpert 4000/6000/8000 Series Display and Meter



### Contents

Description	Page
Metering Products Family . . . . .	V3-T9-6
Power Xpert Meter 4000/6000/8000 Series . . . . .	
Power Xpert Meter 2000 Series . . . . .	V3-T9-34
IQ 250/260 Series Electronic Power Meters . . . . .	V3-T9-45
IQ 130/140/150 Series Electronic Power Meters . . . . .	V3-T9-51
IQ 150S/250S Self-Enclosed Electronic Meters . . . . .	V3-T9-56
IQ 35M . . . . .	V3-T9-61
IQ Analyzer 6400/6600 Series . . . . .	V3-T9-64
IQ DP-4000 Series . . . . .	V3-T9-72
IQ 230 Meters . . . . .	V3-T9-78
Power Xpert Multi-Point Meter . . . . .	V3-T9-85
IQ Energy Sentinel™ . . . . .	V3-T9-97
PM3 Monitoring and Metering Module . . . . .	V3-T9-106
Current Transformers (CTs) . . . . .	V3-T9-107
Clamp-On Current Transformers . . . . .	V3-T9-116
IQ Flange . . . . .	V3-T9-119
Panel Mounting Adapter Kit . . . . .	V3-T9-120
Enclosed Meters . . . . .	V3-T9-121



## Power Xpert Meter 4000/6000/8000 Series

### Product Description

The Power Xpert Meter 4000/6000/8000 Series monitors the critical aspects of an electrical distribution system. This premier power quality metering instrument is simple to use, powerful, scalable and highly flexible.

The Power Xpert Meter 4000/6000/8000 offers a new level of intuitive user interface design, presenting critical electrical distribution system information in simple-to-navigate and easy-to-understand information architecture. The Power Xpert Meter 4000/6000/8000 graphic display visualizes the information from up to 16 meter modules. The embedded Web server displays complex power quality data using standard Internet browsers and allows for device configuration from the browser.

Both the local graphic display and the embedded Web server present real time, historical and event information in a browser-style graphical format to help the user interpret key circuit information, such as:

- Current loading
- Voltage and power levels
- Power factor
- Energy usage
- I/O status
- Power quality measurements
- Harmonic plots
- Disturbance and transient waveforms
- ITIC disturbance summary screen

The Power Xpert Meter 4000/6000/8000 graphic display uses a simple “twist and click” navigation control dial to easily navigate the menus and drill down into increasing levels of important detail. A “back” key enhances the browser-like navigation of the graphic display.

The Web server provides the energy and demand readings required to help manage the cost of energy. It also provides critical information regarding power quality, such as harmonic distortion, flicker, crest factor, K-factor and more.

**Note:** Features and functionality may vary depending on the meter model and options being used. Review the Features and Benefits chart on **Page V3-T9-20** for details.

### Standards and Certifications

- Safety: EN61010-1, UL/cUL 61010-1
- Accuracy: IEC/EN60687 0.2 Class, ANSI C12.20 0.2 Class
- EMC: FCC Part 15 Subpart B Class A EN55011 Class A
- Measurement Canada Approval No. AE-1898 (4000/6000 meters)
- Immunity IEC 61326
- CE Mark



### Application Description

#### Identify Power Quality Problems to Help:

- Identify harmonics, sags, swells and transients damaging or disrupting sensitive, mission-critical IT equipment
- Boost IT equipment's service life to the maximum
- Analyze sequence of events up to 1 millisecond time resolution
- Protect motors from damage
- Preserve the integrity of processes and batches
- Prevent blown capacitor bank fuses
- Protect transformers and conductors from overheating

#### Detect and Record High-Speed Transients to Help:

- Avoid equipment damage and disruption
- Identify equipment malfunction

#### Monitor Circuit Loading to Help:

- Avoid overloads and nuisance overload trips
- Maximize equipment utilization
- Manage emergency overloads

#### Manage Energy Utilization to Help:

- Reduce peak demand charges and power factor penalties
- Identify excessive energy consumption

#### Metered/Monitored Parameters

**Note:** See Page V3-T9-20.

- Volts: L-L, L-N, Avg. L-L, Avg. L-N, N-G
- Phase neutral and ground currents
- Power: real, reactive and apparent
- Frequency
- Power factor: apparent and displacement
- Energy
- Demand
- % THD

- Minimum and maximum values
- Harmonics
- Flicker
- Individual harmonics
- Interharmonics
- % TDD
- ITIC events plot, duration, magnitude
- Energy comparisons
- Demand comparisons
- Event calendar
- Event timeline and sequence
- Number of 9s of availability
- Phasors
- Sequence components
- Crest factor
- K-factor
- PQ Index

#### Accuracy

- Currents: 0.05% RV + 0.025% FS
- Voltage: 0.1% RV + 0.025% FS
- Energy and demand power: 0.2% in accordance with ANSI C12.20
- Frequency:  $\pm 0.01$  Hertz
- Power factor:
  - 0.10% at Unity PF
  - 0.30% at 0.5 PF

#### Communications

Multiple communications ports including:

#### Standard

- RS-485 remote display port
- RS-485 Modbus RTU slave port
- RJ-45 10/100Base-T local configuration port (local Web server connection)
- HTTP (local), FTP, COMTRADE

#### Optional

- Communications Expansion Card (CEC)
  - Selectable 100FX or 10/100Base-T Ethernet network port
  - RS-485 Modbus RTU selectable master/slave port
  - RS-232 Modbus RTU slave port

#### For Optional Graphic Display

**Note:** Display ports provide access to up to 16 Power Xpert 4000/6000/8000 Meter modules located on the display RS-485 network.

- RS-485 meter display network port
- RJ-45 10/100Base-T for access to Local Display Power Xpert network

#### Communication Protocols Supported

- Modbus RTU
- Modbus TCP
- Ethernet TCP/IP
- HTML
- NTP (Network Time Protocol)
- FTP (File Transfer Protocol)
- SMTP (Simple Mail Transfer Protocol)
- SNMP (Simple Network Management Protocol)
- COMTRADE (IEEE C37.111-1999)
- DNP 3.0 over Ethernet (Distributed Network Protocol)

#### Physical Characteristics

##### Two-Piece Design

- Power Xpert 4000/6000/8000 Meter modules
- Power Xpert Meter 4000/6000/8000 Graphic Display 320 x 240 pixel backlight LCD remote graphics display (supports up to 16 Power Xpert 4000/6000/8000 Meter modules)

#### Display/Meter Mounting Options

- Display remotely mounted up to 2000 ft (1219m) away from up to 16 Power Xpert Meter modules
- Display and Power Xpert Meter modules mounted together on opposite sides of a panel (15 additional meter modules can still be remotely mounted).

#### Meter Base Unit Characteristics

- NEMA rating: NEMA 1, IP30

#### Display Unit Characteristics

- NEMA rating: NEMA 12, IP42 front of panel rating

#### Ease of Use—Power Xpert Meter 4000/6000/8000 Graphic Display (Option)

The Power Xpert Meter 4000/6000/8000 display features a large easy-to-read white backlit graphic LCD. The information presented by the display is organized into an information architecture that is easy-to-navigate and organized for simplicity. Screen navigation is accomplished using a navigation control dial and a "back" button. The user simply twists the knob on the navigation control dial to move between menu selections and drill down links on the screen. When the selection is highlighted, pressing the dial makes the selection. Information is displayed from a single meter or an RS-485 daisychain of up to 16 meters. The display features a rich set of screens including real-time data, trend plots, waveform views and an ITIC Plot. The graphic display allows basic device setup and password protected resets. An audible alarm is available to annunciate alarm conditions.

### **Power Xpert Meter 4000/6000/8000 Embedded Web Server**

The Power Xpert Meter 4000/6000/8000 embedded Web server offers Eaton customers a new level of accessibility to the critical information required to manage their electrical distribution system. The Web server includes real-time circuit information in both numeric and graphical visual formats to help monitor circuit parameters such as current loading, voltage and power levels, power factor, THD, Flicker and more. The Web server also provides energy and demand readings with graphic usage plots to help analyze energy usage patterns. Energy readings include kWh, kVARh, delivered and received and kVAh with time of use and RTP displays. The interval energy usage plot includes the ability to do week-to-week and month-to-month energy consumption graphical comparisons for benchmarking purposes. The embedded Web server will also display in simplified Chinese if connected to a computer configured for Chinese language.

Both the Power Xpert Meter 4000/6000/8000 embedded Web server and the local graphic display support graphical trend charts of key circuit measurements such as current, voltage, power and energy. The trend chart supports a zoom feature that allows the user to view data over a short period of 16 hours up to 4 years. The trend chart includes zoom in/out buttons and a horizontal slider bar control to manage scrolling forward and backward through the data. Trend charts of basic readings include minimum, maximum and average readings. Trend charts of interval by interval energy data also display peak demand.

**Note:** For remote access and networking capabilities such as connecting to a LAN/WAN, use the optional Communications Expansion Card (CEC).

### **Sag/Swell/Transient Capture and Recording**

60 cycles of waveform are oversampled at 4096 samples per cycle (Power Xpert Meter 4000/6000), filtered through anti-aliasing and recorded at 512 samples per cycle and post event data. The Power Xpert Meter 8000 samples at a rate of 100,000 samples per cycle. Embedded Web server supports viewing of triggered waveforms one channel at a time and includes the ability to zoom and to scroll horizontally using a slider bar.

The Power Xpert Meter 6000/8000 Series have preconfigured (600 volts and below) trigger settings for sags, swells and transients, and do not require additional setup by the user. Waveforms are stored in non-volatile flash memory using an industry standard COMTRADE format. Waveforms can be automatically sent out as COMTRADE attachments to an e-mail following an event, or can be retrieved from an FTP (File Transfer Protocol) directory structure in the Power Xpert meter module's memory.

### **Historical Trend Logging**

The Power Xpert Meter 4000/6000/8000 records historical data for graphical viewing from the Local display or the embedded Web server. Graphical views of historical data support pan and zoom. 145 standard metering parameters are logged as part of the standard meter functionality including min./max. and average for each parameter. The averages are calculated over the interval period. The minimum and maximum readings are based on 200 ms calculations.

Storage capacity for standard trend plots includes all of the following intervals:

- Every 5 minutes for 48 hours (2 days)
- Every 15 minutes for 192 hours (4 days)
- Every hour for 28 days (4 weeks)
- Every 8 hours for 56 weeks
- Every week for 44 months

**Note:** Trend plot data can be easily exported to third-party applications, such as Microsoft Excel in csv-file format.

In addition, metered parameters are automatically stored on the built-in FTP Servers, where they can be easily copied and imported into third-party applications for benchmarking and analysis. Logs on the FTP Server include the min./max. and average for 145 standard metering parameters at 5-minute intervals.

Storage capacity for trend data:

- 6 days of 5-minute interval trend data
- Capacity=18,144 intervals

### **Energy Profile Data**

The Power Xpert Meter 4000/6000/8000 records Real and Reactive energy forward, reverse, net and absolute sum, as well as Apparent energy (kVAh). Up to 8 status inputs can be configured as energy accumulators for counting KYZ pulse inputs (option). These readings are stored over a configurable interval from 1 to 60 minutes, as well as in daily and weekly totals.

With the optional LAN/WAN Ethernet Communication Expansion Card (CEC), users can easily configure the meters to send periodic e-mails at user-defined intervals of energy consumption and power demand. E-mails contain a summary of readings per rate structures and also have the actual measurements attached to the E-mail's body as a CSV file in a ZIP container.

In addition, metered parameters are automatically stored on the built-in FTP Server, where they can be easily copied and imported into third-party applications for benchmarking and analysis. Logs on the FTP Server include energy consumption logs, one for every month in CSV file format, trended measurement logs also in CSV file format and waveform captures in COMTRADE file format.

Storage capacity for energy profile data:

- 62 days of 15 minute interval energy and pulse interval data.
- Fixed interval capacity = 5952 intervals. Configurable intervals from 1 to 60 min
- 372 days of 1 day accumulated energy and pulse interval data
- 208 weeks of 1 week accumulated energy and pulse interval data

### **Energy and Demand Comparisons**

Energy and demand usage patterns can be analyzed with the month-to-month, week-to-week comparison chart built into the meter. Raw data can be exported with the "Save Table" option to other applications, such as Excel, for further analysis and graphing.

**Catalog Number Selection**

To order a Power Xpert Meter 4000/6000/8000, the catalog number should be determined using the chart shown below. The chart illustrates how to include the desired factory options as part of a catalog number. Option cards that are selected at time of order entry will be installed at the


factory. Option cards are also field installable for field upgrades.

If a display is required, it should be ordered separately. The multi-meter graphic display is capable of displaying data from an RS-485 daisychain of up to 16 Power Xpert Meter 4000/

6000/8000 modules over a distance of up to 1000 ft. Power Xpert Meter modules include panel mounting brackets. The multi-meter graphic display is designed to mount separately. If back-to-back meter to display panel mounting is desired, a mounting bracket kit is available (**PX-PMBA**).

**Example 1:** PXM8251A1BB (PXM 8000 Meter, w/ VAUX, Std. Pwr, Com. Exp. & I/O Cards)

**Example 2:** PXM6251A1BA (PXM 6000 Meter, w/ VAUX, Std. Pwr, Com. Exp. Card)

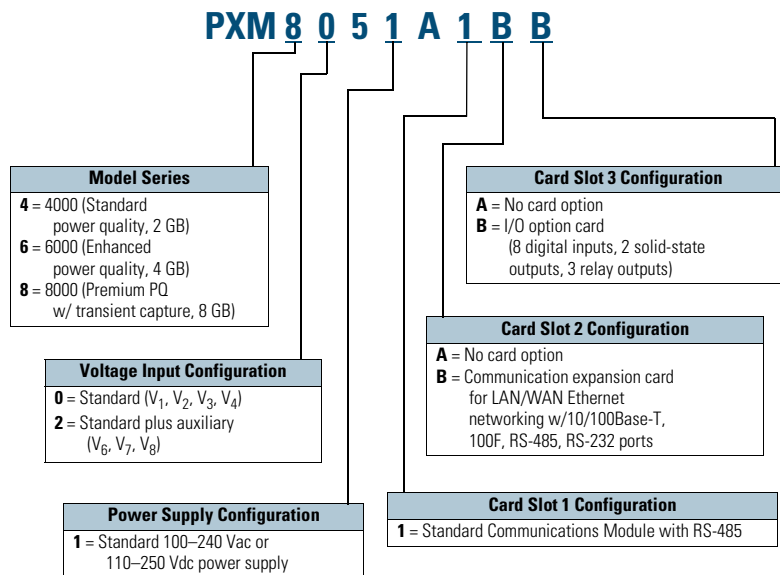**Power Xpert Meter 4000/6000/8000**

Example 1: **PXM8251A5BB** (PXM 8000 meter, w/ VAUX, std. pwr., com. exp. and I/O cards)

Example 2: **PXM6251A6BA** (PXM 6000 meter, w/ VAUX, std. pwr., com. exp. card)

**Accessories****Power Xpert Meter 4000/6000/8000**

Description	Catalog Number
Graphic display module	<b>PXD-MMG</b>
Communication expansion card for LAN/WAN Ethernet networking: 100FX fiber-optic, 10/100T, RS-485, RS-232	<b>PXMCE-B</b> ①
Digital I/O card: eight digital input, two solid-state output, three relay output	<b>PXMIO-B</b> ①
Panel mounting bracket assembly for back-to-back meter to graphic display mounting	<b>PX-PMBA</b>
Panel mounting bracket assembly for retrofitting a graphic display to an IQ Analyzer cutout	<b>PX-PMBB</b>
Panel mounting bracket assembly for reduced graphic display rear clearance	<b>PX-PMBC</b>
Power Xpert Meter 4000 to 6000 license upgrade key	<b>PXM-4KUPG</b>

**Notes**

① These items can be ordered separately or preinstalled in the meter by selecting option B in the model number.

Communication cable (standard Modbus RTU) is not included in the package for meter module connection.

**Technical Data and Specifications****Environmental Conditions**

- Operating temperature:
  - Meter: -20 to +70°C
  - Display: -20 to +60°C operating
- Storage temperature: -40 to +85°C
- Operating humidity: 5% to 95% condensing
- Device weight: 7.1 lbs—meter 2.1 lbs—display
- Meter and back of display are pollution degree 2
- Elevation to 6562 ft (2000m)

**Current Inputs (Each Channel)**

- Conversion: 4096 samples per cycle delta-sigma converter digitally filtered down to 512 samples per cycle
- CT Input: 4096 rms samples per cycle delta-sigma converter digitally filtered down to 512 samples per cycle for anti-aliasing
- Burden: less than 10 milliohms
- Overload withstand: 500A for 1 second, non-repeating
- Range: 0.005–20A continuous
- Accuracy: 0.05% or reading plus 0.01% of full scale (from 50 milliamps to 20A)

**Voltage Inputs (Each Channel)**

- Conversion: 4096 rms samples per cycle delta-sigma converter digitally filtered down to 512 samples per cycle for anti-aliasing
- PT input: 120V–500,000V primary
- Input range: 600V L-L, 347 L-N direct connect
- Nominal full scale: 1000V rms
- Input impedance: 2 megohms

**Frequency Range**

- 47–63 Hz

**Harmonic Response (Voltage, Current)**

- 127th harmonic

**Accuracy**

- ANSI C12.20 0.2 Class
- IEC 687 0.2 Class

**Discrete Inputs**

- Self sourced: 24 Vdc

**Relay Output Contacts**

- 5A maximum, 240 Vac maximum, 30 Vdc maximum
- Lifetime: 1,000,000 no load operations
- 100,000 under rated voltage and load

**Solid-State Outputs**


- Maximum load: 100 milliamps
- Maximum voltage: 30V (externally sourced)

**Control Power Input**


- Input range AC: 100–240 Vac ( $\pm 20\%$ )
- Frequency range: 47–63 Hz
- Input range DC: 110–250 Vdc  $\pm 20\%$
- Burden 50 VA
- Ride-through: 1–5s

## Wiring Diagrams

## Three-Phase, Three-Wire Delta (Up to 600 Volts)

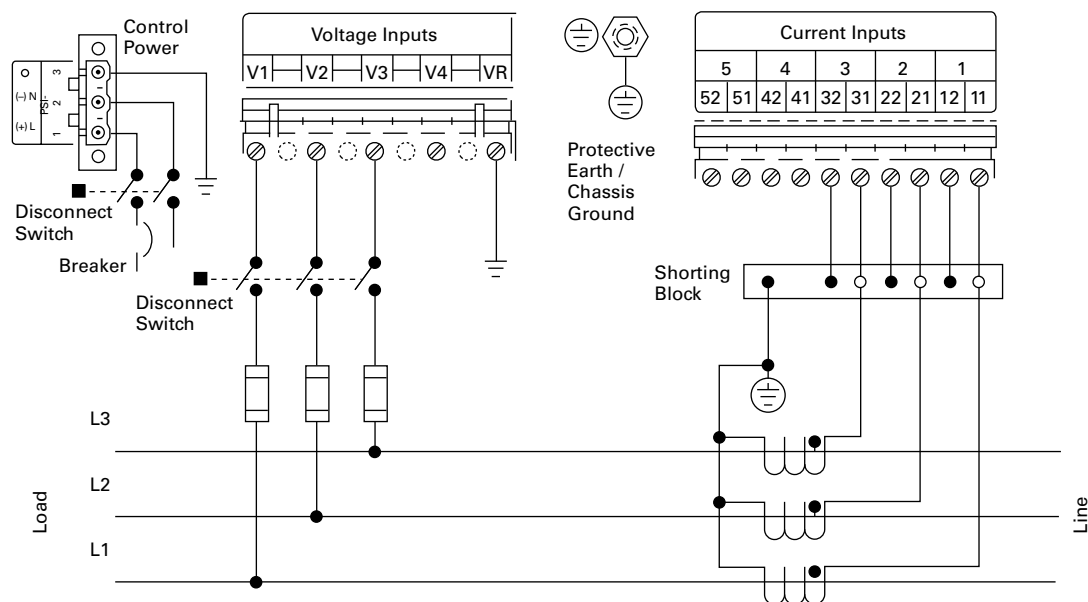

## Three-Phase, Three-Wire Delta (Above 600 Volts)

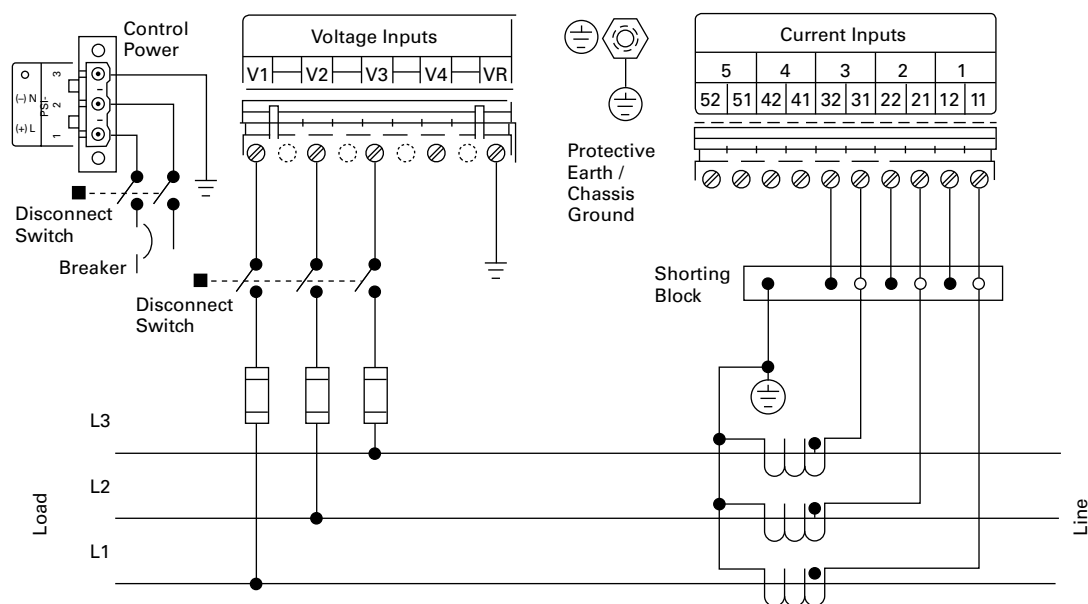
**Note**

Based upon the voltage rating, you may need a control power transformer for the control power.


### Power Xpert Meters Configuration and Wiring Examples

#### Display Link


Up to 16 Meters can be Daisy-Chained to a Single Power Xpert Meter LCD Display

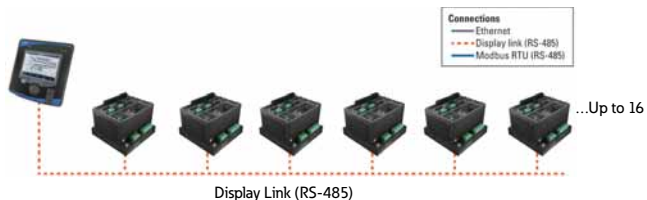


#### Modbus RTU (RS-485)—Non-Web Enabled

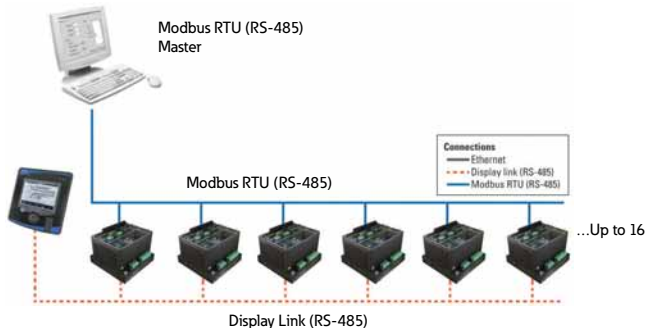


#### Web Enabled—Browser and Modbus TCP

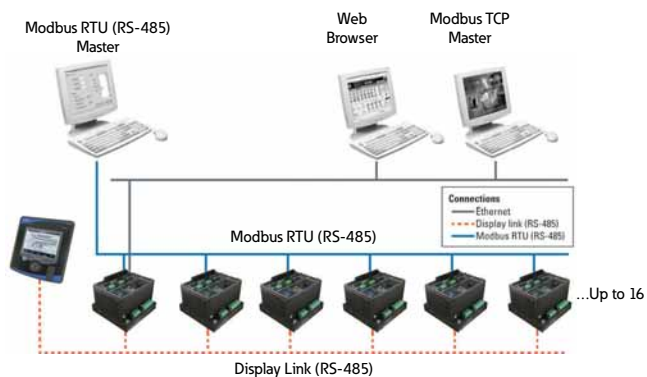


#### Web Enabled—Advanced System Functionality

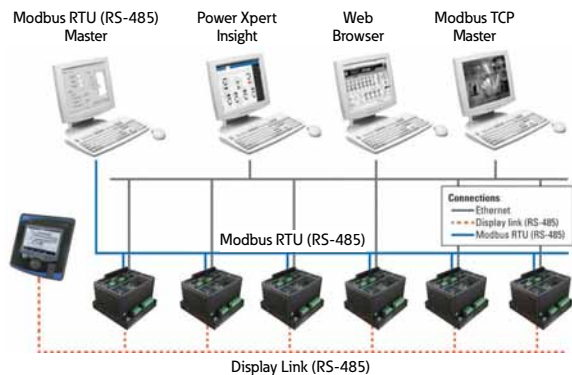

#### Accessories—I/O Card (Option)

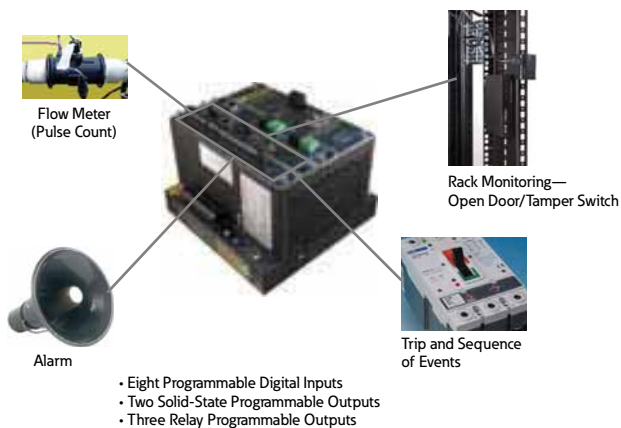


#### IT Configuration Examples—Accessories—I/O Card (Option)

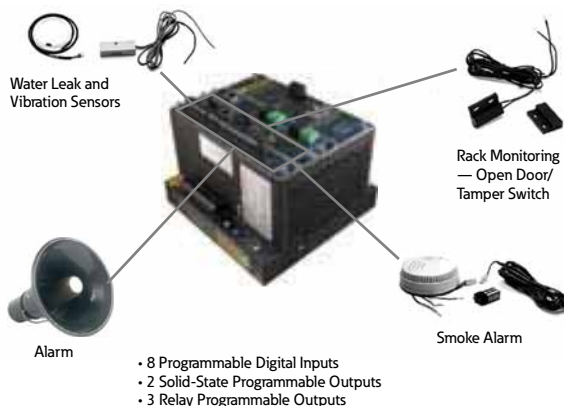


**Dimensions**

Approximate Dimensions in Inches (mm)

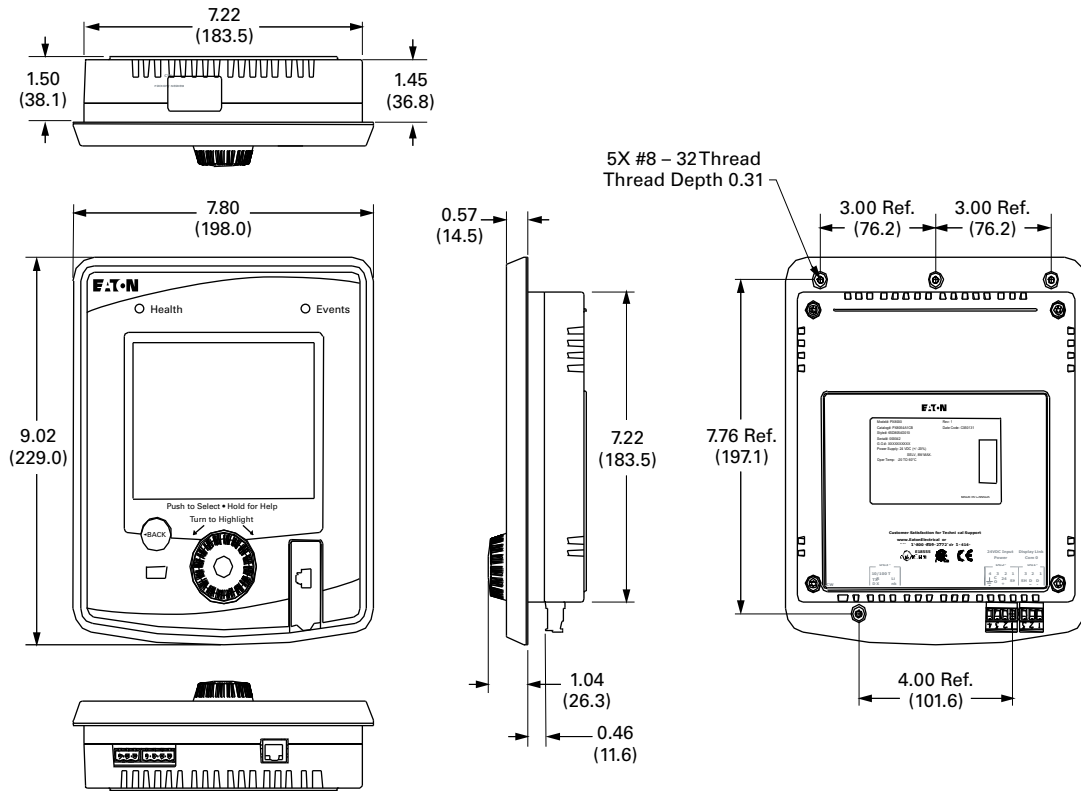**Power Xpert Meter 4000/6000/8000 Multimeter Graphic Display (PXD-MMG)—Sold Separately, Supports up to 16 Power Xpert Meter 4000/6000/8000 Modules**

Approximate Dimensions in Inches (mm)

### Power Xpert Meter 4000/6000/8000 Module

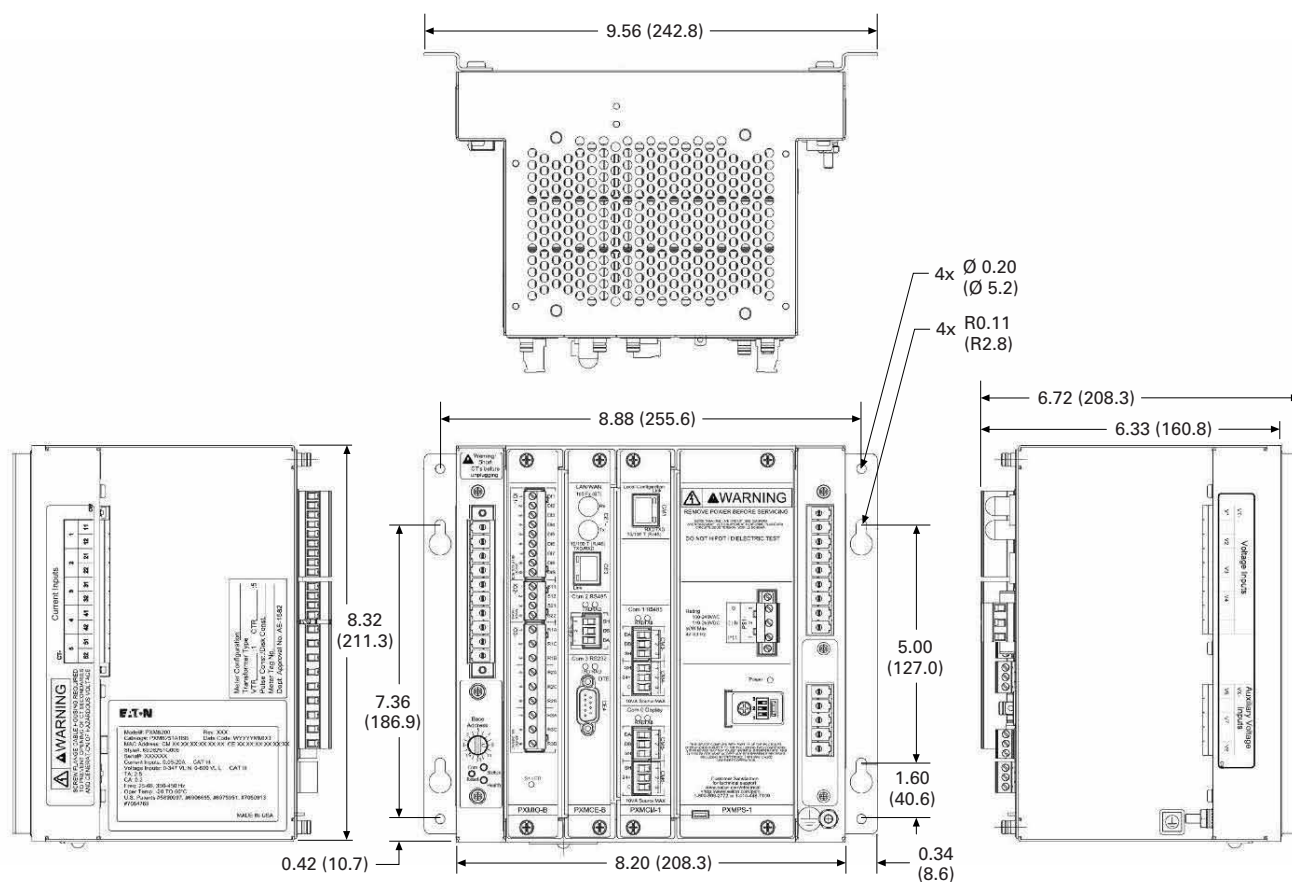

### Meter Base Unit

Width	Height	Depth
9.56 (242.8)	8.88 (225.6)	6.72 (170.8) ①

### Display Unit

Height	Width	Depth
<b>Projection In Front of Panel Surface</b>		
9.02 (229.0)	7.80 (198.1)	1.04 (26.3)
<b>Behind Panel Surface</b>		
9.02 (229.0)	7.80 (198.1)	1.45 (36.8)

### Note

① Including optional wall mounting brackets.