


NTM-713

Aluminum Baffle Cone with White Flange

TRIM DIMENSIONS



Trim OD: 7-1/4"
Aperture: 5-3/4"
Height: 5-1/4"

FEATURES

Trim

Precision spun 0.040 aluminum baffle with deep grooves to reduce aperture glare and white flange.

Mounting

Trim includes two "V" torsion springs to mount trim securely to housing. Replacement "V" torsion springs are available (NRA-86). Socket can be mounted directly to trim without bracket.

Compatible Housings

NTM-713 is compatible with Line Voltage housings.
See individual specification sheets for more information.

Lamp

Line Voltage

100W BR40/PAR38 Maximum (NHIC-17QAT; NHIC-17QNBAT; NHIC-17/100DWQA;
NHR-26Q; NHRIC-17QAT; NHRIC-17QNBAT)

150W BR40/PAR38 Maximum (NH-26Q; NH-26QNB; NHR-26Q)

Labels and Listings

cULus Listed for Damp Location when used with compatible housing

NORALIGHTING.

Type


Project

Catalog No.


Lamp/Wattage

HOUSING DIMENSIONS


NH-26Q / NH-26QNB / NHIC-17QAT / NHIC-17QNBAT

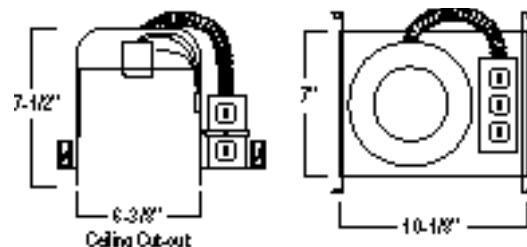

NHIC-17/100DWQA

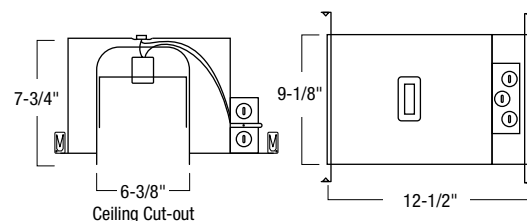

NHR-26Q / NHRIC-17QAT / NHRIC-17QNBAT

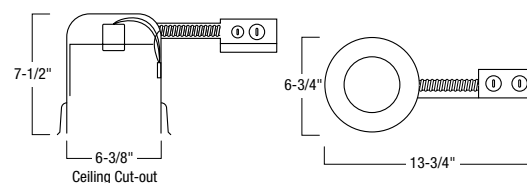

Aluminum Baffle Cone with White Flange

NTM-713BAL: Black Aluminum Baffle Cone with White Flange

NTM-713WAL: White Aluminum Baffle Cone with White Flange

Compatible Housings

LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
NH-26Q	Non-IC New Construction	150W Max.	W: 7" L: 10-1/8" H: 7-1/2"
NH-26QNB	Non-IC New Construction	150W Max.	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-17/100DWQA	IC Double Wall Air-Tight NC	100W Max.	W: 9-1/8" L: 12-1/2" H: 7-3/4"
NHIC-17QAT	IC Air-Tight New Construction	100W Max.	W: 7" L: 10-1/8" H: 7-1/2"
NHIC-17QNBAT	IC Air-Tight New Construction	100W Max.	W: 7" L: 10-1/8" H: 7-1/2"
NHR-26Q	Non-IC Remodel	150W Max.	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-17QAT	IC Air-Tight Remodel	100W Max.	W: 6-3/4" L: 13-3/4" H: 7-1/2"
NHRIC-17QNBAT	IC Air-Tight Remodel	150W Max.	W: 6-3/4" L: 13-3/4" H: 7-1/2"

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040
www.noralighting.com • Specifications subject to change without notice. © 2011
Phone: 800.686.6672 • FAX: 800.500.9955 • e-mail: nora@noralighting.com