



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



NOTES:

- UL LISTED AND CSA CERTIFIED FOR:
 - 600V MAX. VOLTAGE RATING.
 - 221°F (105°C) MAX. TEMP. RATING (CSA).
 - 257°F (125°C) MAX. TEMP. RATING (UL).
 - STRANDED COPPER WIRE ONLY.
- DNF10-250F1B-2K IS RATED FOR 257°F (125°C) BY UL & CSA
- PACKAGE QTY: 3K=3000 PIECES, 2K=2000 PIECES
CONTINUOUS MOLDED STRIP CARRIER
- MATERIAL:
 - STAMPING-CDA 260 BRASS, TIN PLATED
 - HOUSING-TYPE 66 NYLON
- DIMENSIONS IN BRACKETS ARE IN mm OR mm²
- COLORS ARE TRANSLUCENT
- NOTCHES DO NOT APPEAR ON PART# DNF18-250F1B-3K
- DNF10-250F1B-2K IS UL APPROVED FOR USE WITH THE FOLLOWING WIRE COMBINATIONS: (2) #14, (2) #16, (2) #18
TWIST WIRES TOGETHER BEFORE CRIMPING
- DNF10250F1BC-2K HAS HIGH WITHDRAWAL AND INSERTION CHARACTERISTICS (NOT UL/CSA)

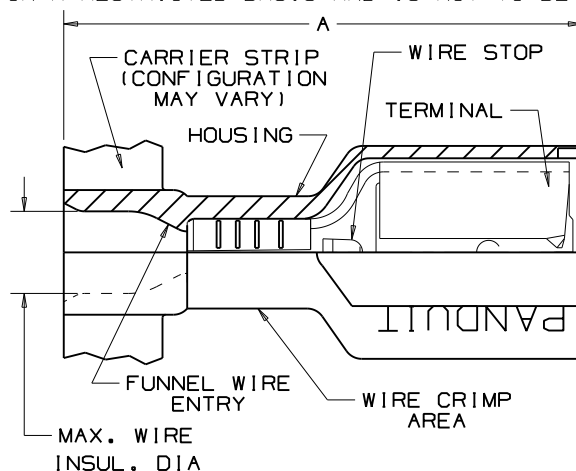


LISTED
20H3
E78522

CERTIFIED
LR31212

TOOL CHART
RECOMMENDED PRESS:
CP-871

PART NUMBER	TAB SIZE	WIRE RANGE AWG (mm ²)	COLOR (note 6)	MAX. INSUL.	DIMENSIONS in.			STRIP LENGTH (1/32 (0.8) -0)	CA-800EZ / CA9 CA-800 APPLICATOR DIES
					A ±.03 (.8)	B ±.02 (.5)	C ±.02 (.5)		
DNF18-250F1B-3K	.250 X .032 (6.3 X 0.8)	22-18 (1.5-1.0)	RED	.136 (3.45)	.84 (21.3)	.35 (8.9)	.22 (5.6)	9/32 (7.1)	CD-800-4 CD9-4A
DNF18-205F1B-3K	.205/.187 X .032 (5.2/4.8 X 0.8)	22-18 (1.5-1.0)	RED	.136 (3.45)	.78 (19.8)	.31 (7.9)	.22 (5.6)	"	
DNF18-206F1B-3K	.205/.187 X .020 (5.2/4.8 X 0.5)	22-18 (1.5-1.0)	RED	.136 (3.45)	.78 (19.8)	.31 (7.9)	.22 (5.6)	"	
DNF18-187F1B-3K	.187 X .032 (4.8 X 0.8)	22-18 (1.5-1.0)	RED	.136 (3.45)	.78 (19.8)	.29 (7.4)	.16 (4.1)	"	
DNF18-188F1B-3K	.187 X .020 (4.8 X 0.5)	22-18 (1.5-1.0)	RED	.136 (3.45)	.78 (19.8)	.29 (7.4)	.16 (4.1)	"	
DNF14-250F1B-3K	.250 X .032 (6.3 X 0.8)	16-14 (1.5-2.5)	BLUE	.160 (4.06)	.84 (21.3)	.35 (8.9)	.22 (5.6)	"	CD-800-5 CD9-5A
DNF14-205F1B-3K	.205/.187 X .032 (5.2/4.8 X 0.8)	16-14 (1.5-2.5)	BLUE	.160 (4.06)	.78 (19.8)	.31 (7.9)	.22 (5.6)	"	
DNF14-206F1B-3K	.205/.187 X .020 (5.2/4.8 X 0.5)	16-14 (1.5-2.5)	BLUE	.160 (4.06)	.78 (19.8)	.31 (7.9)	.22 (5.6)	"	
DNF14-187F1B-3K	.187 X .032 (4.8 X 0.8)	16-14 (1.5-2.5)	BLUE	.160 (4.06)	.78 (19.8)	.29 (7.4)	.18 (4.6)	"	
DNF14-188F1B-3K	.187 X .020 (4.8 X 0.5)	16-14 (1.5-2.5)	BLUE	.160 (4.06)	.78 (19.8)	.29 (7.4)	.18 (4.6)	"	
DNF10-250F1B-2K	.250 X .032 (6.3 X 0.8)	12-10 (4.0-6.0)	YELLOW	.220 (5.59)	.96 (24.4)	.35 (8.9)	.23 (5.8)	3/8 (9.5)	CD-800-13 CD9-13B
DNF10-250F1BC-2K	.250 X .032 (6.3 X 0.8)	12-10 (4.0-6.0)	YELLOW	.220 (5.59)	.96 (24.4)	.35 (8.9)	.23 (5.8)	3/8 (9.5)	

13	07.12	BDK	LSM	ADDED DNF10-250F1BC-2K TO CHART AND NOTE #9 REVISED TOOL CHART	N41165BA-DC	VMB		 PANDUIT CORP. TINLEY PARK, ILLINOIS			
12	02/09	BCT		ADDED NOTE TO TWIST MULTIPLE WIRES TOGETHER PRIOR TO CRIMPING							
11	08/07	SRB		Removed notches from housing DNF18-250F1B-3K							
10	11/04	KLFU		UPDATED TOOL CHART PART NUMBERS							
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM	DRAWN BY DSM	CHK'D	SCALE NONE	DRAWING NO. N41165BA-DC