


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

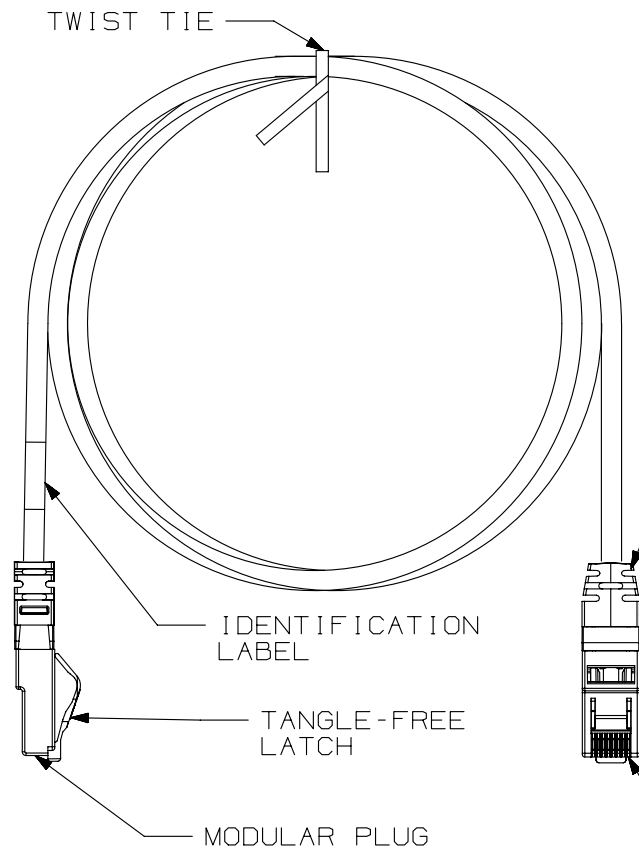

NOTES :

- *1. SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AND TO INDICATE COLOR AND OR PACKAGE QUANTITY.
2. SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PART.
3. TERMINATED WITH (8 POSITION) MODULAR PLUGS AT BOTH ENDS PER T568B.
4. CONSTRUCTED WITH STRANDED CAT6 UTP 24AWG CM PATCH CABLE
5. MATERIALS:
PLUG: POLYCARBONATE
BOOT: CLEAR PVC
6. NOMINAL CABLE JACKET DIAMETER IS 0.235 IN (5.97MM)

STRAIN RELIEF BOOT

T568B WIRING SCHEME



PLUG POSITION:

1
2
3
4
5
6
7
8

CABLE WIRE :
WHITE/ORANGE
ORANGE
WHITE/GREEN
BLUE
WHITE/BLUE
GREEN
WHITE/BROWN
BROWN

CABLE COLORS	** = COLOR
OFF WHITE	- -
BLACK	BL
BLUE	BU
RED	RD
YELLOW	YL
GREEN	GR
ORANGE	OR
VIOLET	VL

SEE SHEET 2 FOR
PATCH CORD LENGTHS
AND PART NUMBERS

PART NUMBER		UTPSPXX**Y			
TITLE					
TX6 PLUS UTP PATCH CORDS (CM)					
CUSTOMER DRAWING					
ITEM REVISION NAME		M02479NV/00			
DATASET FILE NAME		M02479NV_DC360/00E			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .010 [.3] .XX ± .03 [.8] ANGLES ±				MATERIAL :	
 THIRD ANGLE PROJECTION				DRAWING NUMBER:	
				02479-360	
DRAWN BY	DATE	CHK	SCALE	SIZE	
NER	3-28-06	WJC	NONE	SHT 1 OF 2	A