



Roxtec EzEntry™

The Roxtec EzEntry simplifies cable sealing in cabinets and enclosures. The single-side seal consists of a composite frame and adaptable modules. The product is supplied as ready-made kits which include all necessary components.

- Available in sizes from 4 to 32 cables
- Integrated compression unit
- Allows pre-terminated cables
- Versions available for the FL 21 knock-out and multipin 24 connector knock-out
- Available with stainless steel fasteners upon request to meet requirements in aggressive corrosive environments



EzEntry™ kit, integrated compression unit, PA 66 25% GF



RATINGS

EzEntry 4 mini: IP 55, UL/NEMA 12, 13

EzEntry 4, 10, 16, 24, 32: IP 66/67, UL/NEMA 4, 4x, 12, 13


Kit	Diameter range and number of cables/pipes						Weight		Art. No
	0+3.5-10.5 mm 0+0.138-0.413" (GM 13.3w40)	0+3.5-16.5 mm 0+0.138-0.650" (GM 20w40)	0+3.5-16.5 mm 0+0.138-0.650" (EM 20w40)	0+9.5-32.5 mm 0+0.374-1.280" (EM 40 10-32)	0+3.5-16.5 mm 0+0.138-0.650" (CM 20w40)	0+9.5-32.5 mm 0+0.374-1.280" (CM 40 10-32)	(kg)	(lb)	
EzEntry 4 mini/4		4					0.10	0.22	EZ00000000440
EzEntry 4 mini/9	9						0.10	0.22	EZ00000000490
EzEntry 4/4			4				0.13	0.29	EZ00000000044
EzEntry 10/4			2	2			0.30	0.65	EZ00000001004
EzEntry 10/7			6	1			0.30	0.65	EZ00000001007
EzEntry 10/10			10				0.30	0.65	EZ00000001010

EzEntry™ kit, integrated compression unit, PA 66 25% GF


Kit	Diameter range and number of cables/pipes						Weight		Art. No
							(kg)	(lb)	
	0+3.5-10.5 mm 0+0.138-0.413" (GM 13.3w40)	0+3.5-16.5 mm 0+0.138-0.650" (GM 20w40)	0+3.5-16.5 mm 0+0.138-0.650" (EM 20w40)	0+9.5-32.5 mm 0+0.374-1.280" (EM 40 10-32)	0+3.5-16.5 mm 0+0.138-0.650" (CM 20w40)	0+9.5-32.5 mm 0+0.374-1.280" (CM 40 10-32)			
EzEntry 16/4				4			0.39	0.86	EZ00000001604
EzEntry 16/10			8	2			0.39	0.86	EZ00000001610
EzEntry 16/16			16				0.39	0.86	EZ00000001616
EzEntry 24/6						6	0.80	1.77	EZ00000002406
EzEntry 24/15					12	3	0.80	1.77	EZ00000002415
EzEntry 24/24					24		0.80	1.77	EZ00000002424
EzEntry 32/8						8	1.03	2.27	EZ00000003208
EzEntry 32/20					16	4	1.03	2.27	EZ00000003220
EzEntry 32/32					32		1.03	2.27	EZ00000003232

Modules and frames can be ordered separately.

EzEntry™, technical information

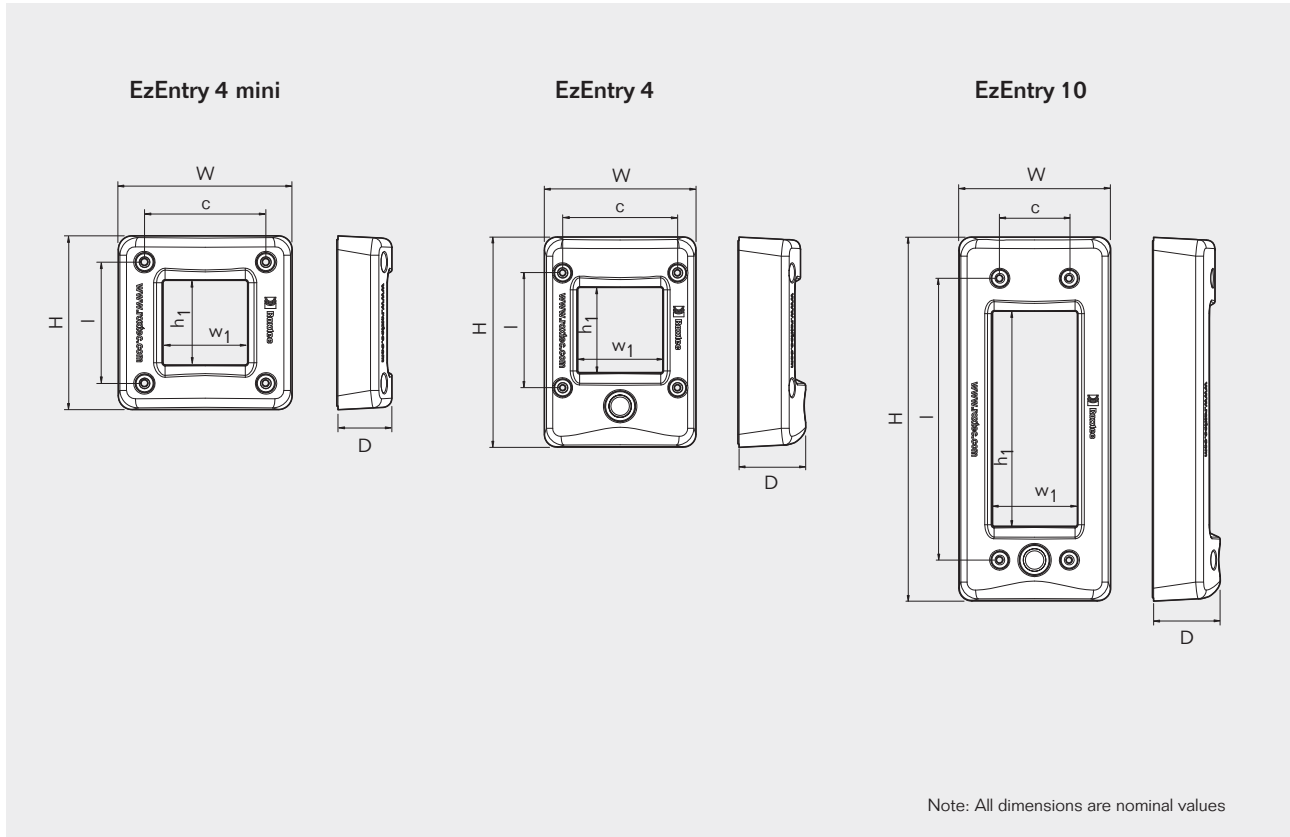

EzEntry™, technical information

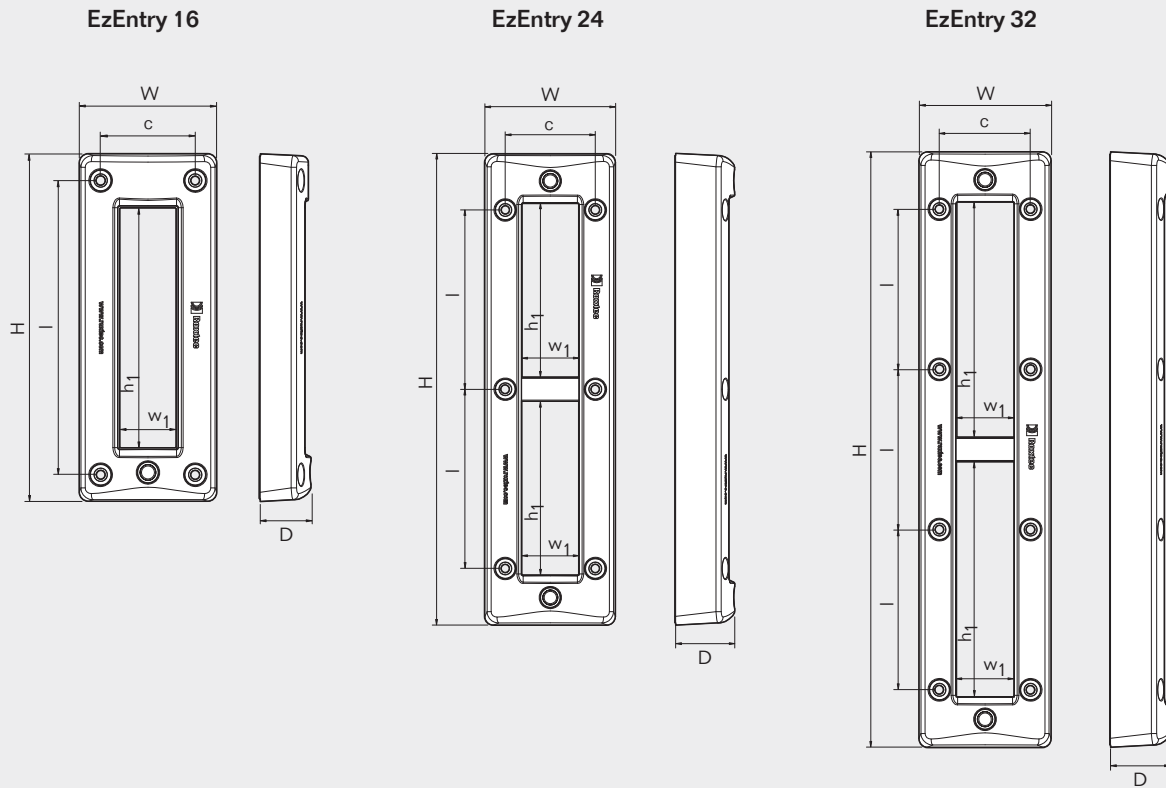

	EzEntry 4 mini		EzEntry 4		EzEntry 10		EzEntry 16		EzEntry 24		EzEntry 32	
Pos	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)	(mm)	(in)
c	53	2.087	53	2.087	32	1.260	62	2.441	62	2.441	62	2.441
D	24	0.945	31	1.220	31	1.220	34	1.339	41	1.614	41	1.614
H	76	2.992	97	3.819	168	6.614	228	8.976	325	12.795	405	15.945
h ₁	40	1.575	40	1.575	100	3.937	160	6.299	120	4.724	160	6.299
L	53	2.087	53	2.087	130	5.118	193	7.598	123.5	4.862	109	4.291
w ₁	40	1.575	40	1.575	40	1.575	40	1.575	40	1.575	40	1.575
W	76	2.992	70	2.756	70	2.756	90	3.543	90	3.543	90	3.543

Max wall thickness (with nuts*):

EzEntry 4 mini: 3 mm (0.118")

EzEntry 16: 3.5 mm (0.138")

EzEntry 4, 10, 24, 32: 8 mm (0.315")

*The fasteners in the kit: self-tapping screws, washers and nuts

Note: All dimensions are nominal values