



Roxtec RG M63 seal


The Roxtec RG M63 entry seal is a cable gland type of seal with adaptable sealing modules at the center. The product is supplied as ready-made kits which include all necessary components.

- Attachment by counter ring nut
- For one to nine cables/pipes
- Allows use of pre-terminated cables
- Recommended knockout punch: Greenlee hole punch (size 2.52" / ISO 63)



RG M63 kit, nickel-plated brass

Also available in stainless steel



RG M63/1



RG M63/4



RG M63/9

Installation tools




page 52

RATINGS IP: 67 UL/NEMA: 4, 4X, 12, 13

Kit	Number of cables/pipes	Diameter range and number of cables/pipes			External dimensions ØxD		Weight		Art. No
		0+3.5-10.5 mm 0+0.138-0.413" (GM 13,3w40)	0+3.5-16.5 mm 0+0.138-0.650" (GM 20w40)	0+9.5-32.5 mm 0+0.374-1.280" (GM 40 10-32)	(mm)	(in)	(kg)	(lb)	
RG M63/1	1			1	74 x 51	2.913 x 2.008	0.5	1.213	RG00063010046
RG M63/4	4		4		74 x 51	2.913 x 2.008	0.5	1.213	RG00063040046
RG M63/9	9	9			74 x 51	2.913 x 2.008	0.5	1.213	RG00063090046

Modules and seals can be ordered separately.

RG M63 kit, technical information

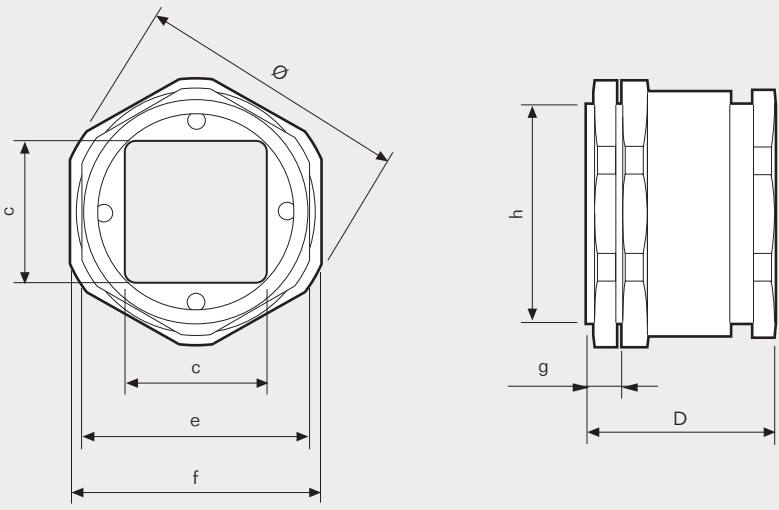

Pos	(mm)	(in)
c	40	1.575
e	SW 64	SW 2.520
f	SW 68	SW 2.677
g	10	0.394
h	M63x1.5	M63x1.5
D	51	2.008
Ø	74	2.913

Max wall thickness: 4 mm (0.157")

Note: All dimensions are nominal values