
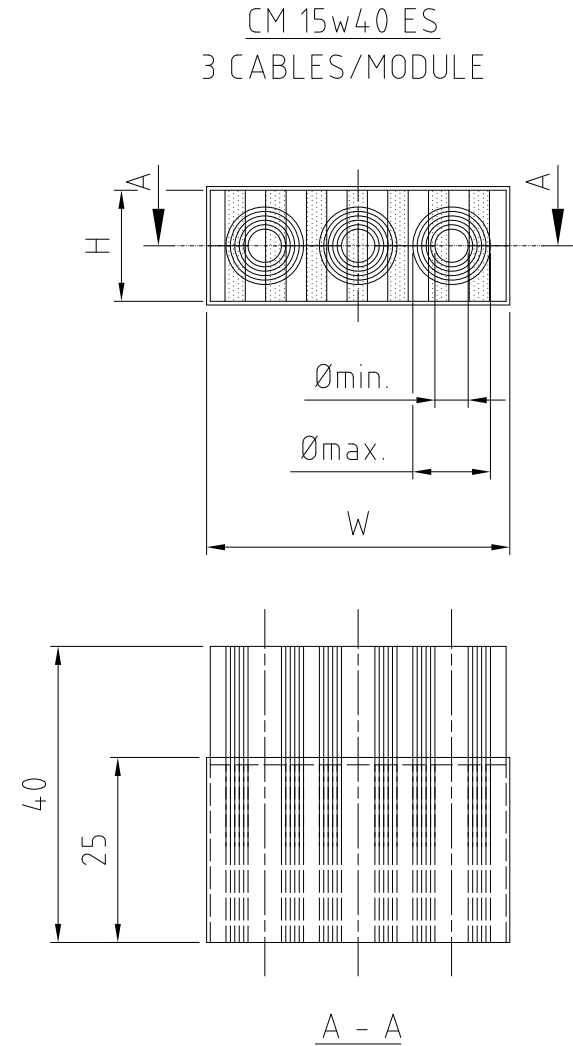
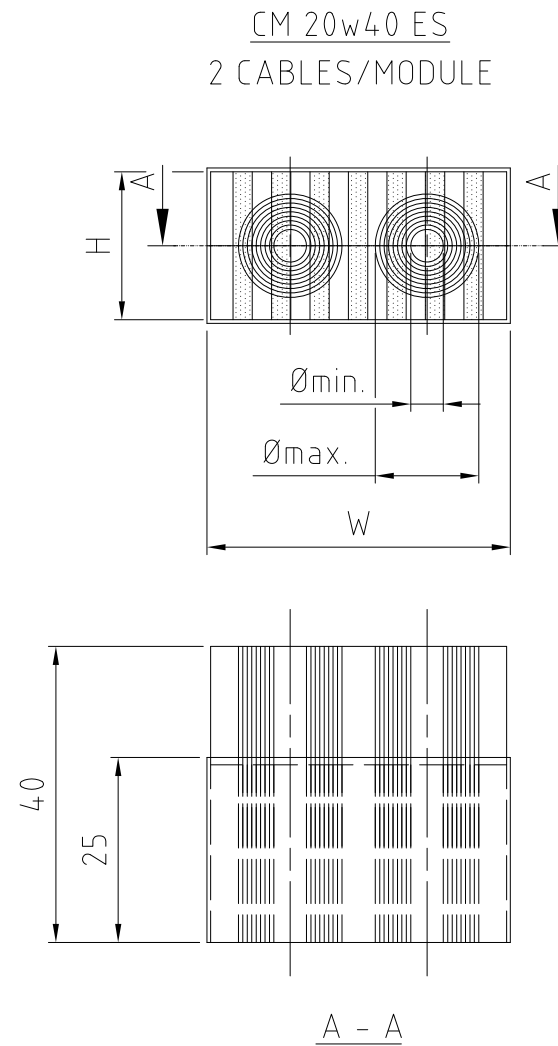
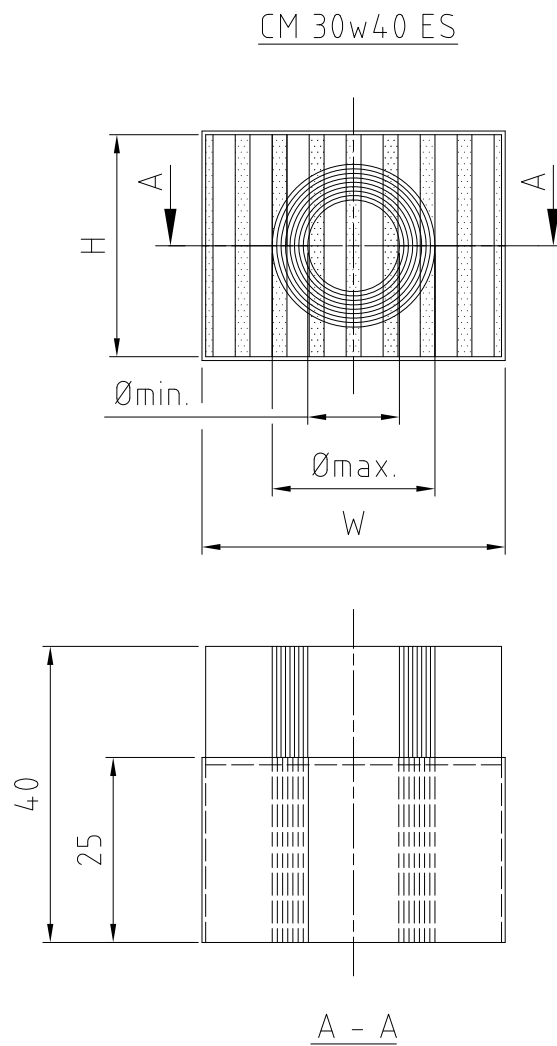


We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden. ©ROXTEC INTERNATIONAL AB

TYPE	W (MM)	H (MM)	Ømin. (MM)	Ømax. (MM)
CM 15 ES	15	15	3	11
CM 15w40 ES	40	15	3.5	10.5
CM 20 ES	20	20	4	14.5
CM 20w40 ES	40	20	3.5	16.5
CM 30 ES	30	30	10	25
CM 30w40 ES	40	30	10	25
CM 40 ES	40	40	21.5	34.5
CM 40 10-32 ES	40	40	9.5	32.5

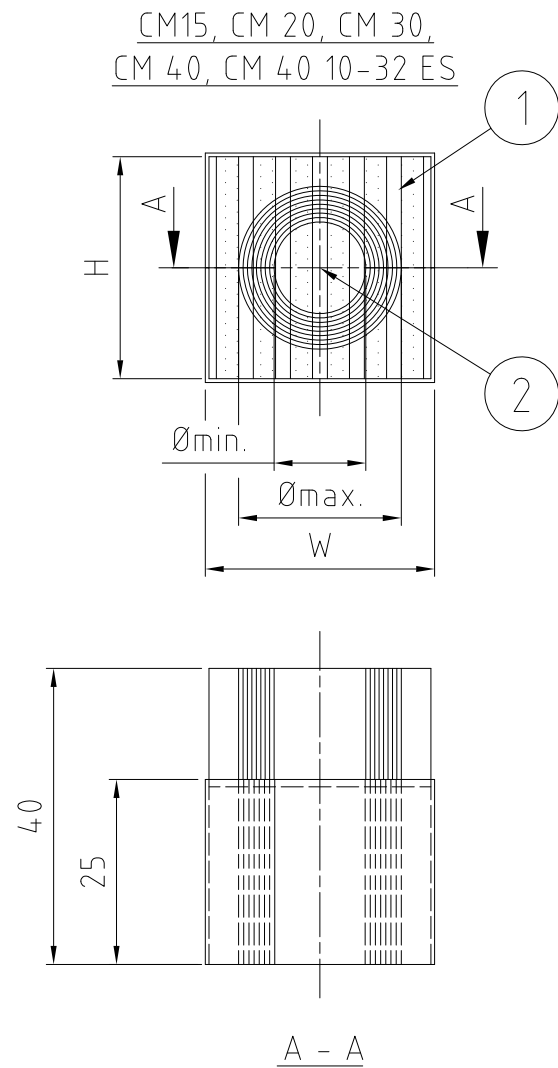

NOTE:

The range of the Roxeltec Module indicates the smallest possible diameter of the dismantled cable screen to the largest possible diameter of the cable mantle.

B	H AND W CORRECTED IN TABLE FOR 20w40 & 15w40	2010-11-02	se-jenboh
Rev	Type of revision	Date	Sign

2	-	CORE	ROXYLON	-
1	-	RUBBER	ROXYLON	-
Item	Qty	Designation	Specification	NetWeight
ROXTEC INTERNATIONAL AB BOX 540 S-371 23 Karlskrona TEL: +46 455 366700 FAX: +46 455 82012		Designed by se-joahel Approved by se-maggus Format A3 Scale 1:1 Restricted due to Information Drawing	Created Date 2004-01-07 Approved Date 2010-11-02 Title CM ES MODULES EMC ASSEMBLY Drawing number S1005791	TotWeight Projection method Rev B