

COMPACT FLUORESCENT LAMPS

Compact fluorescent lamps have become one of the most popular lamp types available. With lumen output similar to that of incandescent lamps, but only using about one quarter of the wattage, it's easy to see why. Satco carries hundreds of variations of high quality, energy efficient and ENERGY STAR® certified compact fluorescent lamps from 5W mini spirals, to decorative types, to our HI-PRO high-wattage spirals suitable for almost any commercial application.

Lamps that keep on saving.

There's also a wide selection of twin, triple, and quad tube pin-based lamps in the Satco/Hygrade™ family. For sure, Satco has a CFL for virtually every lighting application.

CFL features:

- Lamps from 5 to 105 Watts
- Complete choice of color temperatures
- Energy efficient – uses up to 75% less energy than incandescent technology
- Long life – up to 12,000 hours
- Excellent color rendering
- Lamps for consumer and industrial use
- Environmentally friendly – low Mercury
- Many ENERGY STAR® certified choices
- Virtually all industry standard base types available





ENERGY STAR® lamps.

ENERGY STAR is a government-backed symbol for energy efficiency, jointly managed by the U.S. Environmental Protection Agency (EPA) and the U.S. Department of Energy (DOE). The label was created to help consumers easily identify products that save energy and help to protect the environment.

Energy efficient bulbs are recommended in five of the most used residential fixtures or locations – kitchen, living room, bathroom, bedroom, and outdoor. Since these areas of the home have the highest energy use for lighting, these “high five” are good places to start, with plenty of options to suit most applications.




Nuvo Lighting's energy saving Odeon ES five light chandelier in Brushed Nickel with Satin White Glass. Nuvo item number 60-3806. See the www.nuvolighting.com website.



Nuvo Lighting's energy saving Patton ES nine light chandelier in Prairie Bronze with White Frosted Glass. Nuvo item number 60-5159. See the www.nuvolighting.com website.

COMPACT FLUORESCENT

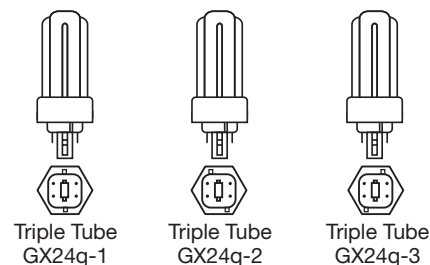

Triple Tube 4-Pin for Electronic & Dimming Ballasts

Watts	Bulb Type	Base	Satco Product #	Lamp Code	Volts	Color Kelvin Temp.	CRI	Avg. Rated Hours	Lumens	M.O.L. Inches	Pkg. Type	Ctn.	Notes
13	T4	GX24q-1	S8399	CFT13W/4P/827	120	2700	82	15000	900	4 1/2	Hang Box	50	2
			S4369 ▲	CF13DT/E/827	120	2700	82	12000	900	4 3/16	Box	50	2
			S8396	CFT13W/4P/830	120	3000	82	15000	900	4 1/2	Hang Box	50	2
			S4370 ▲	CF13DT/E/830	120	3000	82	12000	900	4 3/16	Box	50	2
			S8397	CFT13W/4P/835	120	3500	82	15000	900	4 1/2	Hang Box	50	2
			S4371 ▲	CF13DT/E/835	120	3500	82	12000	900	4 3/16	Box	50	2
			S8398	CFT13W/4P/841	120	4100	82	15000	900	4 1/2	Hang Box	50	2
			S4372 ▲	CF13DT/E/841	120	4100	82	12000	900	4 3/16	Box	50	2
18	T4	GX24q-2	S8341	CFT8W/4P/827	120	2700	82	15000	1200	4 7/8	Hang Box	50	2
			S6741 ▲	CF18DT/E/IN/827	120	2700	82	12000	1200	4 3/8	Box	50	2
			S8342	CFT8W/4P/830	120	3000	82	15000	1200	4 7/8	Hang Box	50	2
			S6742 ▲	CF18DT/E/IN/830	120	3000	82	12000	1200	4 3/8	Box	50	2
			S8343	CFT8W/4P/835	120	3500	82	15000	1200	4 7/8	Hang Box	50	2
			S6743 ▲	CF18DT/E/IN/835	120	3500	82	12000	1200	4 3/8	Box	50	2
			S8344	CFT8W/4P/841	120	4100	82	15000	1200	4 7/8	Hang Box	50	2
			S6744 ▲	CF18DT/E/IN/841	120	4100	82	12000	1200	4 3/8	Box	50	2
26	T4	GX24q-3	S8345	CFT26W/4P/827	120	2700	82	15000	1800	5 11/16	Hang Box	50	2
			S6745 ▲	CF26DT/E/IN/827	120	2700	82	12000	1800	5	Box	50	2
			S8346	CFT26W/4P/830	120	3000	82	15000	1800	5 11/16	Hang Box	50	2
			S6746 ▲	CF26DT/E/IN/830	120	3000	82	12000	1800	5	Box	50	2
			S8347	CFT26W/4P/835	120	3500	82	15000	1800	5 11/16	Hang Box	50	2
			S6747 ▲	CF26DT/E/IN/835	120	3500	82	12000	1800	5	Box	50	2
			S8348	CFT26W/4P/841	120	4100	82	15000	1800	5 11/16	Hang Box	50	2
			S6748 ▲	CF26DT/E/IN/841	120	4100	82	12000	1800	5	Box	50	2
32	T4	GX24q-3	S8349	CFT32W/4P/827	120	2700	82	15000	2400	5 3/16	Hang Box	50	2
			S6749 ▲	CF32DT/E/IN/827	120	2700	82	12000	2400	5 5/8	Box	50	2
			S8350	CFT32W/4P/830	120	3000	82	15000	2400	5 3/16	Hang Box	50	2
			S6750 ▲	CF32DT/E/IN/830	120	3000	82	12000	2400	5 5/8	Box	50	2
			S8351	CFT32W/4P/835	120	3500	82	15000	2400	5 3/16	Hang Box	50	2
			S6751 ▲	CF32DT/E/IN/835	120	3500	82	12000	2400	5 5/8	Box	50	2
			S8352	CFT32W/4P/841	120	4100	82	15000	2400	5 3/16	Hang Box	50	2
			S6752 ▲	CF32DT/E/IN/841	120	4100	82	12000	2400	5 5/8	Box	50	2