

Molded-plastic enclosure for surface mounting Degree of protection IP55 with N and PE terminal Can be locked in O position 82 mm with metric cable gland



Figure similar

General technical data:

Product designation		ISO surface-mounted housing
Design of the product		Assembly
Material of the enclosure		plastic
Protection class IP of the enclosure		IP55
Product component transparent cover		No

Installation/ mounting/ dimensions:

Width	mm	150
Height	mm	250
Depth	mm	181

Certificates/approvals

Declaration of Conformity	Test Certificates	Shipping Approval	other
 EG-Konf.	Special Test Certificate	Type Test Certificates/Test Report	Miscellaneous
		 ABS	 RMRS

other
Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1933-1DA00>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1933-1DA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RV1933-1DA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1933-1DA00&lang=en

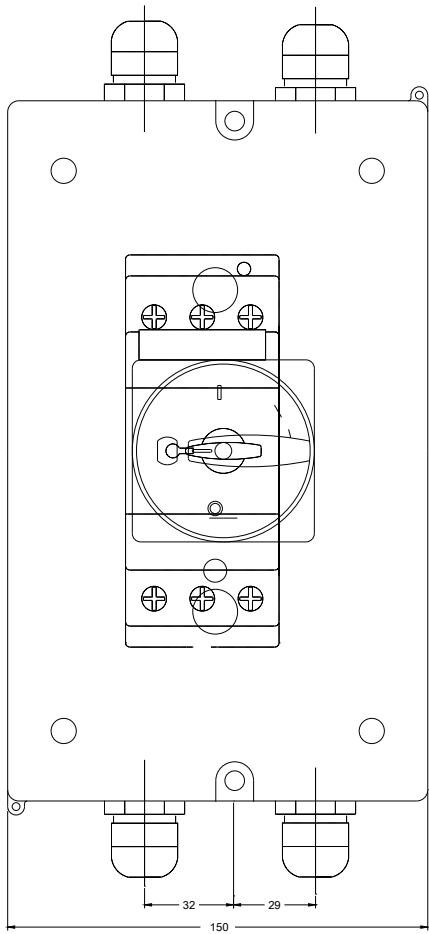

last modified:

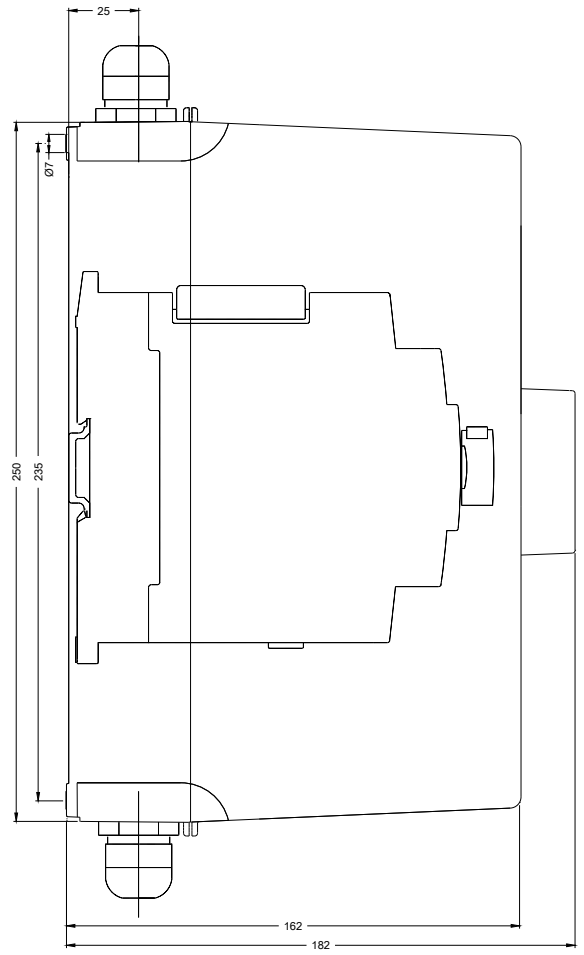

10/31/2018