

Motor starter SIRIUS 3RM1 DOL starter SAFETY 500 V; 0.4 - 2.0 A;
24 V DC Control circuit push-in Main circuit screw terminal



Product brand name	SIRIUS
Product category	Motor starter
Product designation	Fail-safe direct starter
Design of the product	With electronic overload protection and safety-related disconnection
Product type designation	3RM1

General technical data	
Trip class	CLASS 10A
Product function	
• Intrinsic device protection	Yes
Suitability for operation Device connector 3ZY12	Yes
Power loss [W] typical	0.3 W
Insulation voltage	
• rated value	500 V
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• between main and auxiliary circuit	500 V
• between control and auxiliary circuit	250 V
Protection class IP	IP20

Shock resistance	6g / 11 ms
Operating frequency maximum	1 1/s
Mechanical service life (switching cycles) <ul style="list-style-type: none"> • typical 	30 000 000
Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	Q
Reference code acc. to DIN EN 81346-2	Q
Reference code acc. to DIN EN 61346-2	Q
Product function <ul style="list-style-type: none"> • direct start • reverse starting 	Yes No
Product function Short circuit protection	No

Electromagnetic compatibility

Conducted interference <ul style="list-style-type: none"> • due to burst acc. to IEC 61000-4-4 • due to conductor-earth surge acc. to IEC 61000-4-5 • due to conductor-conductor surge acc. to IEC 61000-4-5 • due to high-frequency radiation acc. to IEC 61000-4-6 	3 kV / 5 kHz 4 kV signal lines 2 kV 2 kV 10 V
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Conducted HF-interference emissions acc. to CISPR11	Class B for the domestic, business and commercial environments
Field-bound HF-interference emission acc. to CISPR11	Class B for the domestic, business and commercial environments

Safety related data

Safety device type acc. to IEC 61508-2	Type B
Safety Integrity Level (SIL) acc. to IEC 61508	3
Performance level (PL) acc. to EN ISO 13849-1	e
Category acc. to EN ISO 13849-1	4
Stop category acc. to DIN EN 60204-1	0
Safe failure fraction (SFF)	99.4 %
Average diagnostic coverage level (DCavg)	99 %
Diagnostics test interval by internal test function maximum	600 s
Function test interval maximum	1 y
Failure rate [FIT] <ul style="list-style-type: none"> • at rate of recognizable hazardous failures (λ_{dd}) • at rate of non-recognizable hazardous failures (λ_{du}) 	1 400 FIT 16 FIT
PFHD with high demand rate acc. to EN 62061	0.00000002 1/h
PFDavg with low demand rate acc. to IEC 61508	0.000018

MTTFd	75 y
Hardware fault tolerance acc. to IEC 61508	1
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Safe state	Load circuit open
Protection against electrical shock	finger-safe
Off-delay time with safety-related request when switched off via control inputs maximum	43 ms
Off-delay time with safety-related request when switched off via supply voltage maximum	120 ms
Hardware fault tolerance acc. to IEC 61508 relating to ATEX	0
PFDavg with low demand rate acc. to IEC 61508 relating to ATEX	0.0005
PFHD with high demand rate acc. to EN 62061 relating to ATEX	0.00000005 1/h
Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX	SIL2
T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX	3 y

Main circuit

Number of poles for main current circuit	3
Adjustable pick-up value current of the current-dependent overload release	0.4 ... 2 A
Minimum load [%]	20 %
Type of the motor protection	solid-state
Operating voltage <ul style="list-style-type: none"> • rated value 	48 ... 500 V
Relative symmetrical tolerance of the operating voltage	10 %
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
Relative symmetrical tolerance of the operating frequency	10 %
Operating current <ul style="list-style-type: none"> • at AC at 400 V rated value • at AC-53a at 400 V at ambient temperature 40 °C rated value 	2 A 2 A
Ampacity when starting maximum	16 A
Operating power for three-phase motors at 400 V at 50 Hz	0.09 ... 0.75 kW

Inputs/ Outputs

Input voltage at digital input <ul style="list-style-type: none"> • at DC rated value 	24 V
--	------

<ul style="list-style-type: none"> • with signal <0> at DC • for signal <1> at DC 	0 ... 5 V 15 ... 30
Input current at digital input <ul style="list-style-type: none"> • with signal <0> typical • for signal <1> typical 	0.001 A 0.008 A
Input current at digital input <ul style="list-style-type: none"> • for signal <1> at DC • with signal <0> at DC 	8 mA 1 mA
Number of CO contacts for auxiliary contacts	1
Operating current of auxiliary contacts at AC-15 at 230 V maximum	3 A
Operating current of auxiliary contacts at DC-13 at 24 V maximum	1 A

Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage 1 <ul style="list-style-type: none"> • at DC rated value 	24 V
Operating range factor control supply voltage rated value at DC <ul style="list-style-type: none"> • initial value • Full-scale value 	0.8 1.25
Control current at DC <ul style="list-style-type: none"> • in standby mode • when switching on • during operation 	13 mA 150 mA 57 mA

Response times

Switch-on delay time	65 ... 76 ms
Off-delay time	30 ... 43 ms

Installation/ mounting/ dimensions

Mounting position	vertical, horizontal, standing (observe derating)
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
Height	100 mm
Width	22.5 mm
Depth	141.6 mm
Required spacing <ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards — at the side 	0 mm 0 mm 50 mm 50 mm 0 mm

• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	50 mm
— at the side	3.5 mm
— downwards	50 mm

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
Relative humidity during operation	10 ... 95 %
Air pressure	
• acc. to SN 31205	900 ... 1 060 hPa

Communication/ Protocol

Product function Bus communication	No
---	----

Connections/Terminals

Type of electrical connection	screw-type terminals for main circuit, PUSH-IN connection (spring-loaded connection) for control circuit
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	PUSH-IN connection (spring-loaded connection)
Type of connectable conductor cross-sections	
• for main contacts	
— solid	1x (0,5 ... 4 mm ²), 2x (0,5 ... 2,5 mm ²)
— finely stranded with core end processing	1x (0,5 ... 4 mm ²), 2x (0,5 ... 1,5 mm ²)
• at AWG conductors for main contacts	1x (20 ... 12), 2x (20 ... 14)
Connectable conductor cross-section for main contacts	
• single or multi-stranded	0.5 ... 4 mm ²
• finely stranded with core end processing	0.5 ... 4 mm ²
Connectable conductor cross-section for auxiliary contacts	
• single or multi-stranded	0.5 ... 1.5 mm ²
• finely stranded with core end processing	0.5 ... 1 mm ²
• finely stranded without core end processing	0.5 ... 1.5 mm ²
Type of connectable conductor cross-sections	
• for auxiliary contacts	
— solid	1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 1.5 mm ²)
— finely stranded with core end processing	1x (0,5 ... 1,0 mm ²), 2x (0,5 ... 1,0 mm ²)


— finely stranded without core end processing	1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 1.5 mm ²)
• at AWG conductors for auxiliary contacts	1x (20 ... 16), 2x (20 ... 16)
AWG number as coded connectable conductor cross section	
• for main contacts	20 ... 12
• for auxiliary contacts	20 ... 16

UL/CSA ratings

Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	2 A
Yielded mechanical performance [hp]	
• for single-phase AC motor	
— at 230 V rated value	0.125 hp
• for three-phase AC motor	
— at 200/208 V rated value	0.333 hp
— at 220/230 V rated value	0.333 hp
— at 460/480 V rated value	0.75 hp

Certificates/approvals

General Product Approval	For use in hazardous locations	Functional Safety/Safety of Machinery
 CCC	 EAC	 ATEX
 CSA		Type Examination Certificate
 UL		

Declaration of Conformity	other
 EG-Konf.	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1102-3AA04>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1102-3AA04>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<https://support.industry.siemens.com/cs/ww/en/ps/3RM1102-3AA04>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1102-3AA04&lang=en

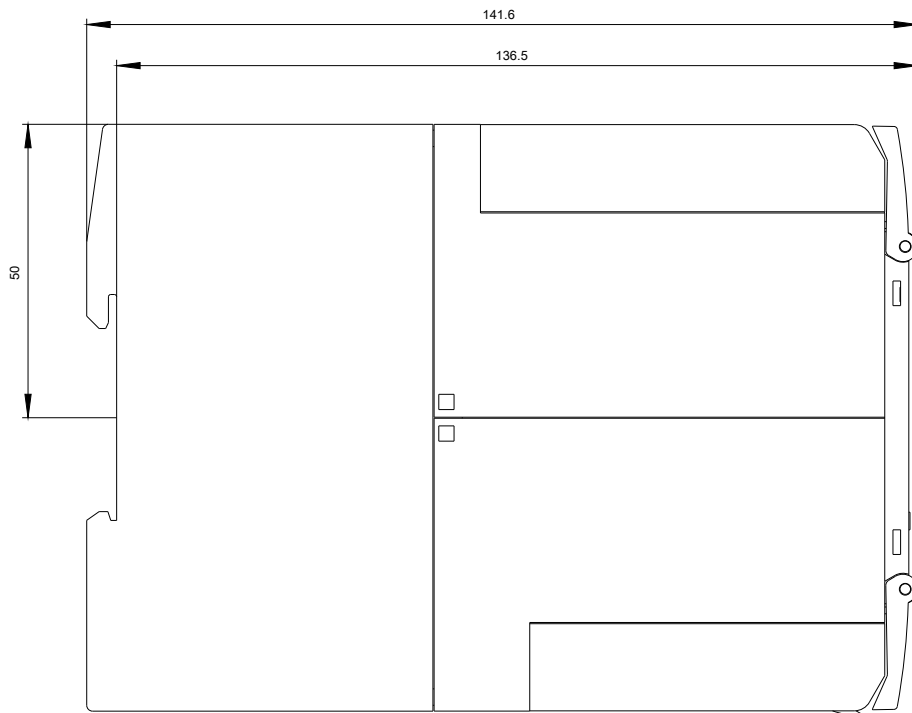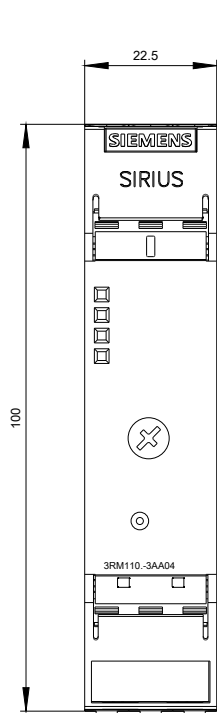

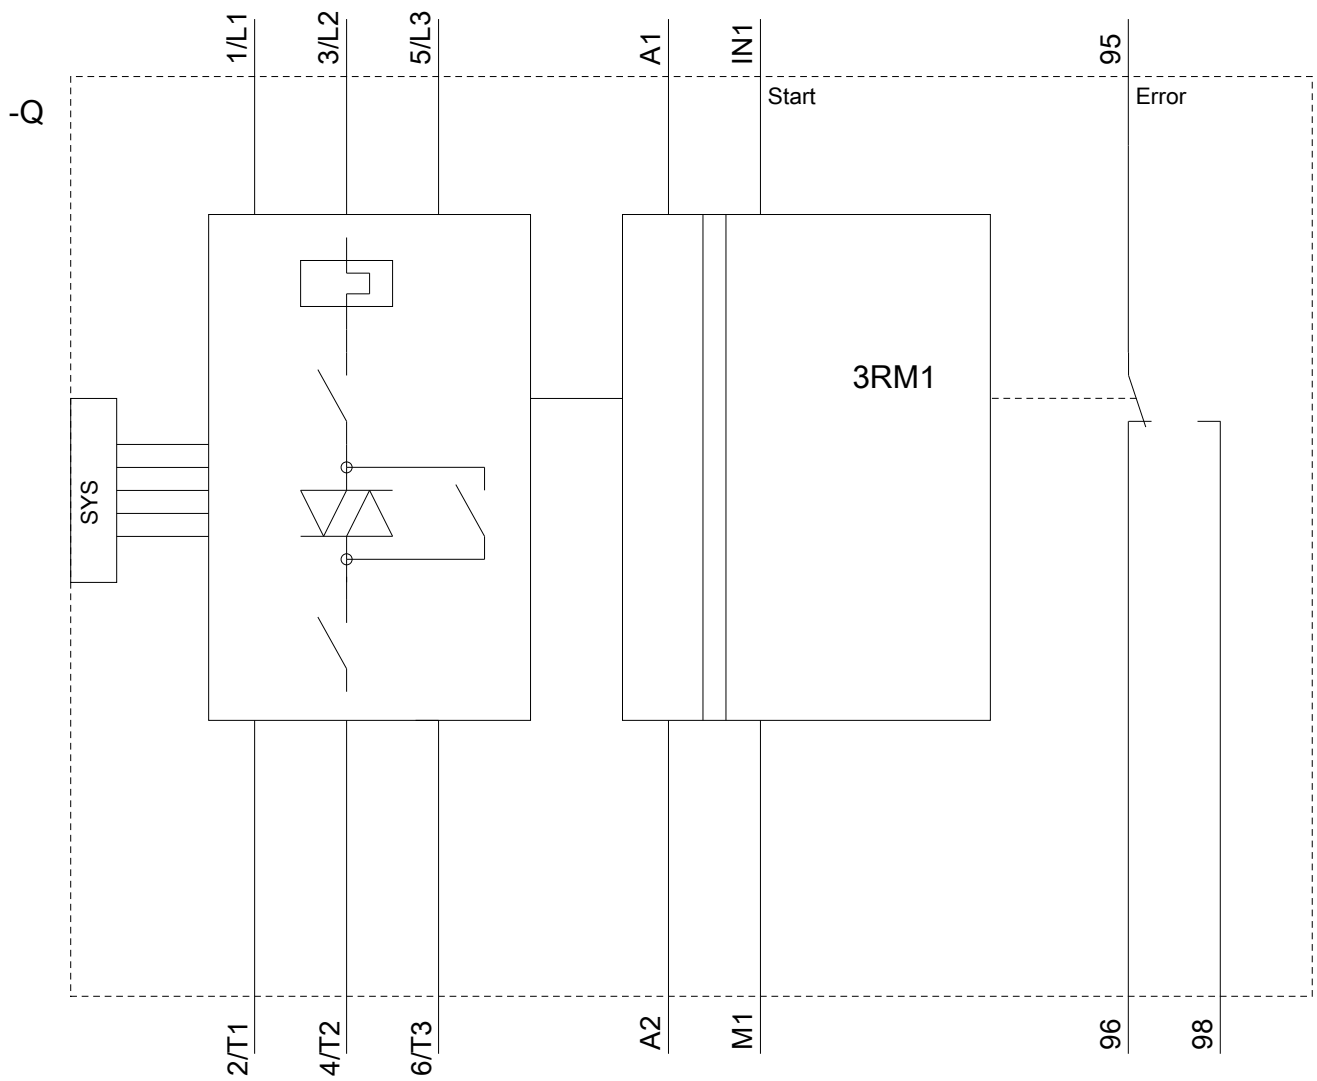

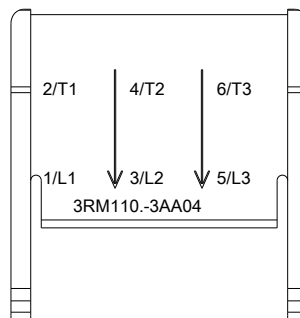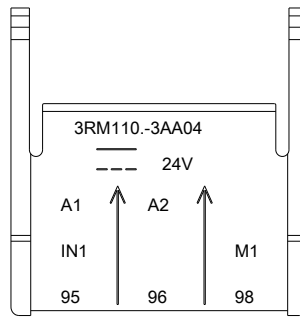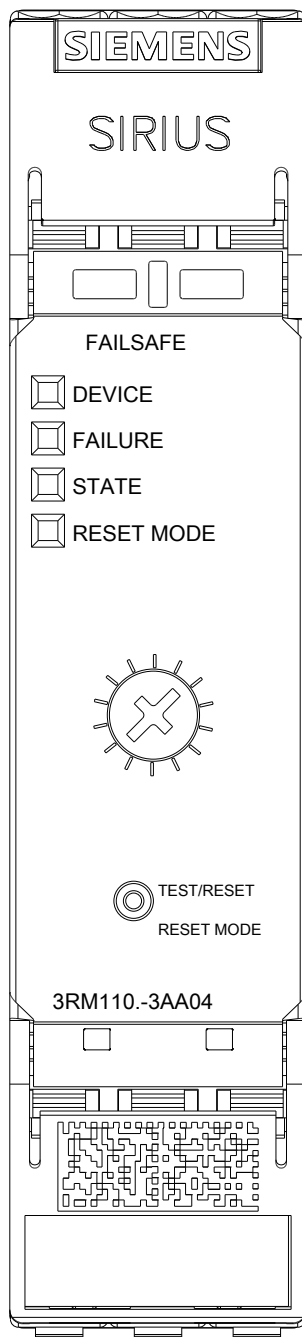

last modified:

01/19/2019