


Confie à titre de secret d'entreprise. Tous droits réservés.
Confido como secreto de empresa. Nos reservamos todos los derechos.
Comunicado como segredo empresarial. Reservados todos os direitos.

Weitergabe sowie Vervielfältigung dieser Unterlagen, Verwertung und Mitteilung ihres Inhalts sind gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte vorbehalten. Insbesondere für den Fall der Patentierung oder OH-Entragung.

The reproduction, translation or use of this document or its contents is not permitted without express written authority. Offenders will be liable for damages. All rights, including rights created by patent grant or registration or a utility model or design, are reserved.

CAD-Drawing
Manual modification
prohibited





90° abgewinkelt
90° angled

Länge nach Längenschlüssel
Length according to length code

M20x1,5 Metrisch
M20x1,5 metric

Vibrationsschutz O-Ring/
anti-vibration o-ring

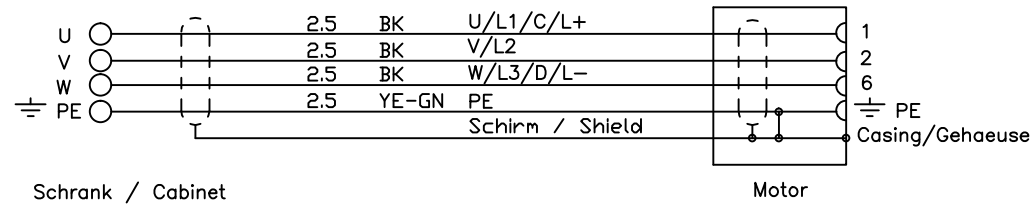

MLFB der konfekt. Leitung MLFB of the cord set 6FX7002-5LM62		
Komponenten / Components		
Ringkabelschuh / Ring connector DIN 46234-6-2,5	Kabel / raw cable 6FX8008-1BB21	Stecker Vollgewinde/ Connector full thread 6FX2003-0LA00

Belonging to this:

DIN 6		Allg.Toleranz: ISO 2768-mK	--	Doc-Number: A5E00901968D	
First angle projection		Tolerierung ISO 8015	--	Scale: 1:1	Kg/piece: --
		Tolerances:	Surface:	--	A3 Sheet size
		Date:	06.06.2013	Leistungsleitung Linear 4x2,5 Gr. 1 SLMS	
		Author:	Merkel		
		Check:	Hentschel		
		Dep.:	I DT MC RD HW7	Name:	
		Site:	Erlangen F80	Typ/MLFB: 6FX7002-5LM62	
		SIEMENS		A5E00901968	
		Sector Industry		TA	AA
		Rev. Modification		Doc.type	Revision
		Date		1- Scheett:	
		Name		1 Scheets:	
				Replacement for / replaced by	