

“OPTIMIZING UPTIME.”

SOLA  HD






## PROTECT SENSITIVE COMPUTER AND MANUFACTURING OPERATIONS WITH AN UNINTERRUPTIBLE DC POWER SUPPLY.

The SDU DIN Rail DC UPS is the only choice for the highest level of reliability and efficiency of your operations.



**From the industry leader in power quality solutions comes an uninterruptible power supply that's designed specifically for critical DC-powered equipment.** The SolaHD SDU DIN Rail DC UPS keeps computers, manufacturing equipment and other machines running smoothly when the power fails. Data corruption and production losses from interrupted power become a thing of the past. And because it's DC, unnecessary AC/DC energy conversion losses are eliminated.

The SDU DIN Rail DC UPS takes industry-leading design to create unique installation options. The SDU delivers safety by being the only UPS available with an external battery module. Now you can seal the electronics in the panel while maintaining the battery outside of a non-ventilated enclosure. It's a full-featured 24 Vdc uninterruptible power supply with automatic self-test functionality ensuring that the UPS and battery are ready when needed.

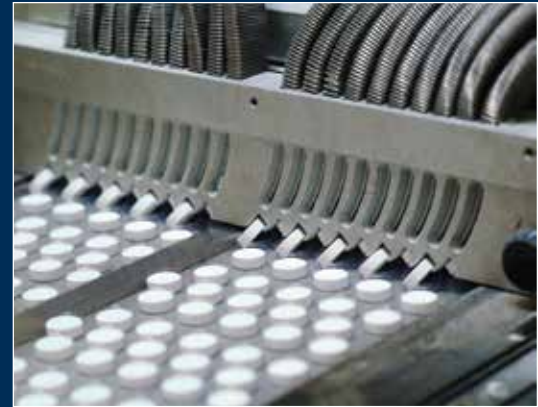

# SDU DIN RAIL DC UPS

The compact uninterruptible DC power supply that protects sensitive DC equipment from power failure losses.

## FEATURES

- **Modular, rugged industrial grade design**
- **All components UL 508**
- Microprocessor based controls
- **Automatic self-test feature for UPS function and battery management check**
- Power module wide operation temperature range (-20 to +50°C)
- Flexible batteries back-up expansion capabilities
- Overload protection in normal and battery modes
- **User replaceable batteries**
- IP-20 rated input and output screw terminals
- No internal fan, no extra cooling required
- **LED Status Indicators for easy visual diagnostics**
- **Universal Dry Contact Relay terminals provide remote signaling**
- **Monitoring, diagnostics, and remote shut-off capabilities**
- Two year warranty

## VERSATILE APPLICATIONS

The SDU DC UPS protects the increasing number of microprocessor-based technologies common in the industrial environment from voltage fluctuations and power failures on the factory floor. Back up DC power during power disturbances reduces production losses and helps maintain high efficiency levels. A few example applications include:

- Industrial/Machine Control
- Automation Process Control
- Computer-based Control Systems
- Conveying Equipment
- Material Handling
- Packaging Machines

## ADVANTAGES

These units include easy to wire screw terminations for critical devices needing battery back-up. The SDU DC UPS includes an automatic self-test feature that checks the UPS and battery functions. Battery charging occurs automatically when input DC power is applied. When power fails, the DC UPS will switch to battery back-up. If the battery is no longer useful, the UPS will sound an alarm and an LED indicator will illuminate.

Back-up power protection in modern industrial applications depend mainly on AC UPS. AC is converted to DC, and converted back to AC in the AC UPS, then converted back to DC in the protected equipment power supply. By applying the new Sola SDU DIN Rail DC UPS, you avoid the inefficiencies of all these conversions. This design maximizes system up-time flexibility, and optimizes reliability assurance, making the SDU DC UPS the definition of DC power quality.



## SELECTION PROCESS

There are three individual hardware products when putting an SDU DC UPS system into operation:

1. 24 Vdc Power Supply (Recommended Sola SDN Series)
2. 24 Vdc SDU DC UPS Power Module
3. 24 Vdc SDU DC UPS Battery Module, or
4. 24 Vdc SDU DC UPS External Battery Module

There are two models of the Power Module:

SDU 10-24, 24 Vdc/10 amp (battery modules are required)  
SDU 20-24, 24 Vdc/20 amp (battery modules are required)

There are two models of the Battery Modules ①:

- **DIN Rail Mounted Battery Option:** SDU 24-BAT, DIN Rail/Panel mount for installation in ventilated enclosure. Up to four battery modules can be connected to the SDU DC UPS.
- **External Battery Option:** SDU 24-BATEM, Panel mount, alternate battery module for external installation of non-ventilated enclosures. One battery module can be connected to the SDU DC UPS.



### Back-up Times (Typical)

SDU 10-24 with SDU 24-BAT					
LOAD	20% (2A)	40% (4A)	60% (6A)	80% (8A)	100% (10A)
1 unit	113	45	30	21	14
2 units	247	114	74	48	38
3 units	396	178	117	80	58
4 units	531	233	148	111	81
SDU 10-24 with SDU 24-BATEM					
1 EBP	135	52	28	19	14
SDU 20-24 with SDU24-BAT					
LOAD	20% (4A)	40% (8A)	60% (12A)	80% (16A)	100% (20A)
1 unit	46	21	10	06	04
2 units	116	50	28	17	10
3 units	178	80	46	31	20
4 units	237	113	65	43	31
SDU 20-24 with SDU 24-BATEM					
1 EBP	48	17	9	6	4

### Battery Module Specifications

PARAMETER	SDU 24-BAT	SDU 24-BATEM
Nominal Voltage	24 Vdc	
Protection	Fuse: 30A	Circuit Breaker: 24V, 25A
Charging Current	0.5A	0.8A
Enclosure Dimension in. (mm)	4.88 x 8.31 x 4.55 (124 x 211 x 116)	11.5 x 5.57 x 4.57 (292 x 142 x 116)
Enclosure Type	IP20	NEMA 1
Terminal Connector Type	Polarized Powerpole Connectors	
Batteries	Replaceable Batteries	
Accessories	1 ft polarized battery cable	6 ft polarized battery cable
Operating Temperature	-20° to +50°C	
Storage Temperature	-20° to +40°C	
Humidity	95% non-condensing	
Safety Standard For DC UPS System*	UL 60950-1/CSA C22.2 No. 60950-1 UL 508/ CSA C22.2 No. 107.1 IEC/EN 60950-1	
Weight - lbs (kg)	12 (5.33)	16 (7.11)
Mounting	Simple snap-on system for DIN Rail TS35/7.5 or TS35/15 or optional chassis mounting brackets SDU-PMBRK.	Wall/Chassis Mounting

### Selection Table

CATALOG NUMBER	DESCRIPTION	APPROX. SHIP WEIGHT lbs (kg)
SDU 10-24	240 VA, 24V/10A DIN Rail DC UPS power module, battery module is required	1.65 (0.65)
SDU 20-24	480 VA, 24V/20A DIN Rail DC UPS power module, battery module is required	1.65 (0.65)
SDU 24-BAT	24V DIN Rail/Panel Mount Battery Module (cable included)	12.0 (5.33)
SDU 24-BATEM	24V External Mount Battery Module (cable included)	16.0 (7.11)
SDU 24EXTBC6	Optional 6ft Battery Module Cable to 24 Vdc SDU DC UPS	0.5 (0.22)
SDU 24-DB9	Optional interface kit to convert relay contacts signals to RS232/DB9 signals	1.0 (0.45)
SDU-PMBRK	Optional chassis mounting brackets to secure UPS to wall, panel, or enclosure	0.5 (0.22)

① Can not use a combination of both models of the battery modules, only one model of the battery module can be connected to the SDU DC UPS.

For a full listing of SolaHD's DIN Rail Power Supply and Power Quality products, visit our website at [www.SolaHD.com](http://www.SolaHD.com) or consult our full line catalog.

## Power Modules Specifications

SPECIFICATION	CATALOG NUMBER	
	SDU 10-24	SDU 20-24
	<b>INPUT</b>	
Nominal Input Voltage	24 Vdc	
Input Voltage Range	22.5 - 30 Vdc	
Input Fuse	DC Fuse 30A	
	<b>OUTPUT</b>	
Nominal Output Voltage	24 Vdc	
Output Voltage Range	22.5 - 30 Vdc	
Output Current	10A	20A
Current Limit	12A	22A
	<b>PROTECTION</b>	
Input Protection	Fuse for overload & short circuit protection	
Overload Protection	Electrical Circuit Protection	
Short Circuit	UPS output cut off immediately	
	<b>BATTERY MODULE</b>	
Type	Sealed, maintenance-free lead acid batteries	
Charging Current	0.5 A	
Typical Recharge Time (to 90% of full capacity)	8 Hours for 1 Battery Module 24 Hours for 2 Battery Module 12 Hours for each additional Battery Module	
Back-up Time (full load) ②	14 Minutes	4 Minutes
Protection	UPS Shutdown when battery voltage drops below 22V, to prevent the complete depletion of the battery, short circuit protection by a 30A fuse	
	<b>PHYSICAL</b>	
Net Weight - lbs (kg)	1.65 (0.75)	
Dimensions H x W x D (mm)	4.88 x 3.02 x 4.55 (124 x 81 x 116)	
	<b>ALARM</b>	
Battery Low	Rapid Audible Indicator every 1 second	
Overload	Continuous Audible Indicator	
	<b>ENVIRONMENT</b>	
Audible Noise	<40dBA (1 meter from surface)	
Power Module Operating Temperature	-20°C to +50°C	
Storage Temperature	-20°C to +70°C	
Humidity	0-95% non-condensing	
Max Elevation	3500 meters (11,483 feet)	
Shock & Vibration	According to ISTA 2A	
	<b>DC UPS SYSTEM SAFETY ③</b>	
CE	Low Voltage Directive: IEC/EN 60950-1; CB Scheme	
	EMC Directive: EN62040-2, IEC 61000-4-2, IEC61000-4-3, IEC61000-4-8	
	<b>GENERAL</b>	
MTBF	> 200,000 Hours	
	<b>INSTALLATION</b>	
Output	Outputs are capable of providing high currents for short periods of time for inductive load startup or switching. Fusing may be required for wire/loads if 2x Nominal O/P current rating cannot be tolerated. Continuous current overload allows for reliable fuse tripping.	
Mounting	Simple snap-on system for DIN Rail TS35/7.5 or TS35/15 or optional chassis mounting brackets SDU-PMBRK	
Connections	Input & Output: IP20-rated screw terminals, connector size range: 16-12 AWG (0.5-4 mm <sup>2</sup> ) for copper conductors rated 90°	
Relay Contact Terminal Connections	IP20 screw terminals; connector size range: 24-16 AWG (0.34-4mm <sup>2</sup> )	
Case	Fully enclosed metal housing with ventilation grid to keep out small particles	
Free Space	20 mm above and 35 mm below, 20 mm left and right, 10 mm in front	

② See Battery Back-up Times on next page.

③ DC UPS System includes one power module (SDU 10-24 or SDU 20-24) and one or more battery modules (SDU 24-BAT or SDU 24BATEM)

SolaHD is our premium line of power-conversion and power quality solutions products under Appleton Group, a business unit of Emerson Industrial Automation.

Emerson Industrial Automation brings integrated manufacturing solutions to diverse industries worldwide. Our comprehensive product line, extensive experience, world-class engineering and global presence enable us to implement solutions that give our customers the competitive edge.

For over 150 years, our electrical product brands have been providing a rich tradition of long-term, practical, high quality solutions with applications ranging from the construction and safe operation of petrochemical and process plants to providing quality power that precisely controls automotive robotic production.

Engineers, distributors, contractors, electricians and site maintenance professionals around the world trust Emerson Industrial Automation brands to make electrical installations safer, more productive and more reliable.

Appleton Group is organized into three focused businesses that provide distributors and end-users expert knowledge and excellent service.

#### Electrical Construction Materials

This group is made up of the Appleton, Nutsteel and O-Z/Gedney brands. They manufacture a broad range of electrical products including conduit and cable fittings, plugs and receptacles, enclosures and controls, conduit bodies and industrial and hazardous lighting. Whether the application is hazardous location, industrial or commercial, the electrical construction materials group has the products to meet your needs.

#### Power Quality Solutions

The SolaHD brand offers the broadest power quality line, including uninterruptible power supplies, power conditioners, voltage regulators, shielded transformers, surge protection devices and power supplies.

#### Heating Cable Systems

This group is made up of the EasyHeat and Nelson brands. They offer a broad range of electrical heating cable products for residential, commercial and industrial applications.

Asia/Pacific  
+ 65.6891.7600

Australia  
+ 61.3.9721.0348

Brazil — São Paulo/SP  
+ 55.11.2122.5777

Brazil — Camaçari/BA  
+ 55.71.3496.4427

Canada  
+ 1.888.765.2226

China  
+ 86.21.3418.3888

Europe  
+ 33.3.2254.1390

Mexico/Latin America  
+ 52.55.5809.5049

Middle East/Africa/India  
+ 971.4.811.8100

United States  
+ 1.800.621.1506

Appleton Grp LLC  
9377 W. Higgins Road  
Rosemont, IL 60018  
1.800.377.4384  
solahd.com

**SOLAHD**



**EMERSON**  
Industrial Automation

Appleton Grp LLC d/b/a Appleton Group. The Appleton, O-Z/Gedney, SolaHD, EasyHeat, Nelson and Emerson logos are registered in the U.S. Patent and Trademark Office. EasyHeat, Inc. is a wholly owned subsidiary of Appleton Grp LLC. All other product or service names are the property of their registered owners. © 2014, Appleton Grp LLC. All rights reserved.

**EMERSON. CONSIDER IT SOLVED.™**