

Popular for good reason.

Halogen lamps come in more sizes, shapes, and base variations than most other technologies, and with good reason – brilliant white light, great color temperature, and color rendering properties, long life, and superior lumen maintenance combine to make them very popular. Satco stocks virtually every variation there is. Our wide inventory allows you to get the types you need, whether a specialty size or an incandescent A19 replacement, that meets government regulations. When it comes to Halogen lamps, we can confidently say “Yes, we have that.”

Halogen lamp features:


- Available from 5 to 1500 Watts
- From 6 to 240 Volt variations
- All industry standard sizes and bases
- Fully dimmable
- Environmentally friendly – Mercury free
- Energy efficient
- Our Halogen Excel line saves up to 30% in energy costs over traditional incandescent lamps
- Halogen/Xenon technology for enhanced performance in our Halogen Excel™ line
- Excellent color rendering
- High lumen output



Nuvo Lighting's Lynne five light vanity in Polished Nickel with Frosted Glass. Nuvo item number 60-5178. See the www.nuvolighting.com website.



HALOGEN

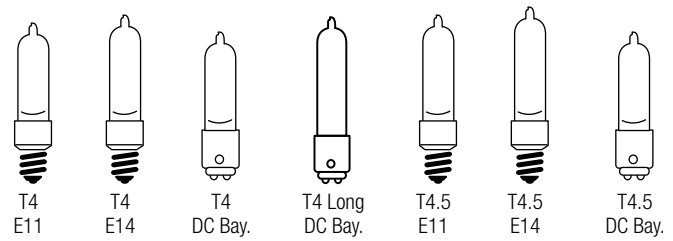

Single Ended - E11 MiniCan - E12 Cand - E14 Euro - BA15d DC Bay. (continued)

Watts	Bulb Type	Base	Satco Prod. #	Lamp Code	Volts	Finish	M.O.L. Inches	Filament	Initial Lumens	Avg. Rated Hours	Pkg. Type	Carton	Notes
100	T4	E11	S3107	100Q/CL/MC	120	Clear	2 11/16	CC-8	1700	2000	Box	12	
			S3485	100Q/CL/MC	120	Clear	2 11/16	CC-8	1700	2000	CD/1	12	
			S1916	100Q/FR/MC	120	Frost	2 11/16	CC-8	1530	2000	Box	12	
	E14		S3132	100Q/CL/E14	120	Clear	2 15/16	CC-8	1700	2000	Box	12	
			S3491	100Q/CL/E14	120	Clear	2 15/16	CC-8	1700	2000	CD/1	12	
			S3147	100Q/CL/DC	120	Clear	2 3/8	CC-8	1700	2000	Box	12	
	DC Bay.		S3488	100Q/CL/DC	120	Clear	2 3/8	CC-8	1700	2000	CD/1	12	
			S1920	100Q/F/DC	120	Frost	2 3/8	CC-8	1530	2000	Box	12	
			S4361	100Q/CL/DC	120	Clear	2 3/8	CC-2V	1600	2000	Box	10	2
150	T4.5	E11	S3108	150Q/CL/MC	120	Clear	2 11/16	CC-8	2700	2000	Box	12	
			S3486	150Q/CL/MC	120	Clear	2 11/16	CC-8	2700	2000	CD/1	12	
			S1917	150Q/F/MC	120	Frost	2 11/16	CC-8	2430	2000	Box	12	
	E14		S3133	150Q/CL/E14	120	Clear	3	CC-8	2700	2000	Box	12	
			S3492	150Q/CL/E14	120	Clear	3	CC-8	2700	2000	CD/1	12	
			S3122	150Q/CL/DC	120	Clear	2 11/16	CC-8	2700	2000	Box	12	
	DC Bay.		S3489	150Q/CL/DC	120	Clear	2 11/16	CC-8	2700	2000	CD/1	12	
			S1921	150Q/F/DC	120	Frost	2 11/16	CC-8	2430	2000	Box	12	
250	T4.5	E11	S3109	250Q/CL/MC	120	Clear	3 1/8	CC-8	4200	2000	Box	12	
			S3487	250Q/CL/MC	120	Clear	3 1/8	CC-8	4200	2000	CD/1	12	
			S1918	250Q/F/MC	120	Frost	3 1/8	CC-8	3780	2000	Box	12	
	E14		S3134	250Q/CL/E14	120	Clear	3 5/16	CC-8	4200	2000	Box	12	
			S3493	250Q/CL/E14	120	Clear	3 5/16	CC-8	4350	2000	CD/1	12	
			S3123	250Q/CL/DC	120	Clear	2 13/16	CC-8	4200	2000	Box	12	
	DC Bay.		S3490	250Q/CL/DC	120	Clear	2 13/16	CC-8	4200	2000	CD/1	12	
			S1922	250Q/F/DC	120	Frost	2 13/16	CC-8	3780	2000	Box	12	
500	T4	E11	S3181	500Q/CL	120	Clear	3 7/16	CC-8	8500	2000	Box	12	
			S3182	500Q/F	120	Frost	3 7/16	CC-8	7650	2000	Box	12	
			S4363 ▲	500Q/MC/EYX	120	Frost	3 3/4	CC-8	10100	2000	Box	12	3
	DC Bay.		S1983	500Q/CL	120	Clear	3 3/4	CC-8	8500	2000	Box	12	
			S1984	500Q/F	120	Frost	3 3/4	CC-8	7650	2000	Box	12	