



Buzzer element, continuous tone or pulsating, adjustable, 85 dB, 115 V AC/DC, diameter 50 mm

General technical data			
product brand name	SIRIUS		
product designation	Buzzer element		
type of voltage of the operating voltage	AC/DC		
operating voltage			
• 1 at AC at 50 Hz rated value	115 V		
• 1 at AC at 60 Hz rated value	115 V		
relative positive tolerance of the operating voltage	10 %		
relative negative tolerance of the operating voltage	-10 %		
consumed current maximum	35 mA		
type of acoustic signal	continuous tone / pulse tone		
loudness level	85 dB		
service life of acoustic signal device	5 000 h		
tone frequency			
• 1	2.5 kHz		
material	PC		
color	black		
fastening method	Bayonet		
reference code			
• acc. to DIN EN 61346-2	P		
• acc. to IEC 81346-2	P		
Mechanical data			
outer diameter of the signal column element	50 mm		
Ambient conditions			
ambient temperature during operation	-20 ... +50 °C		
protection class IP	IP54		
product function adjustable acoustic signal	Yes		
height	72 mm		
width	52 mm		
Certificates/ approvals			
General Product Approval	EMC	Declaration of Conformity	other



[Miscellaneous](#)

[Confirmation](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4240-0FA>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4240-0FA>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/8WD4240-0FA>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=8WD4240-0FA&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4240-0FA&lang=en)

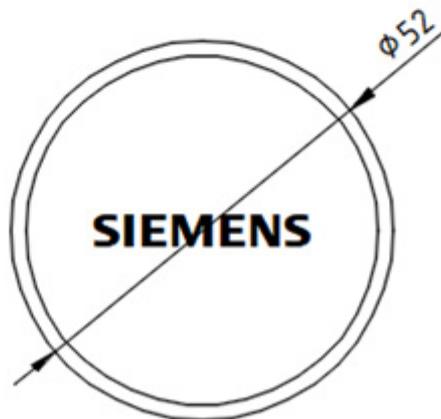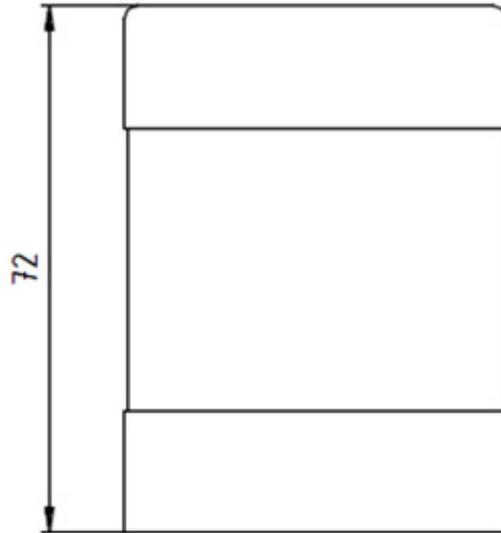

**-P**

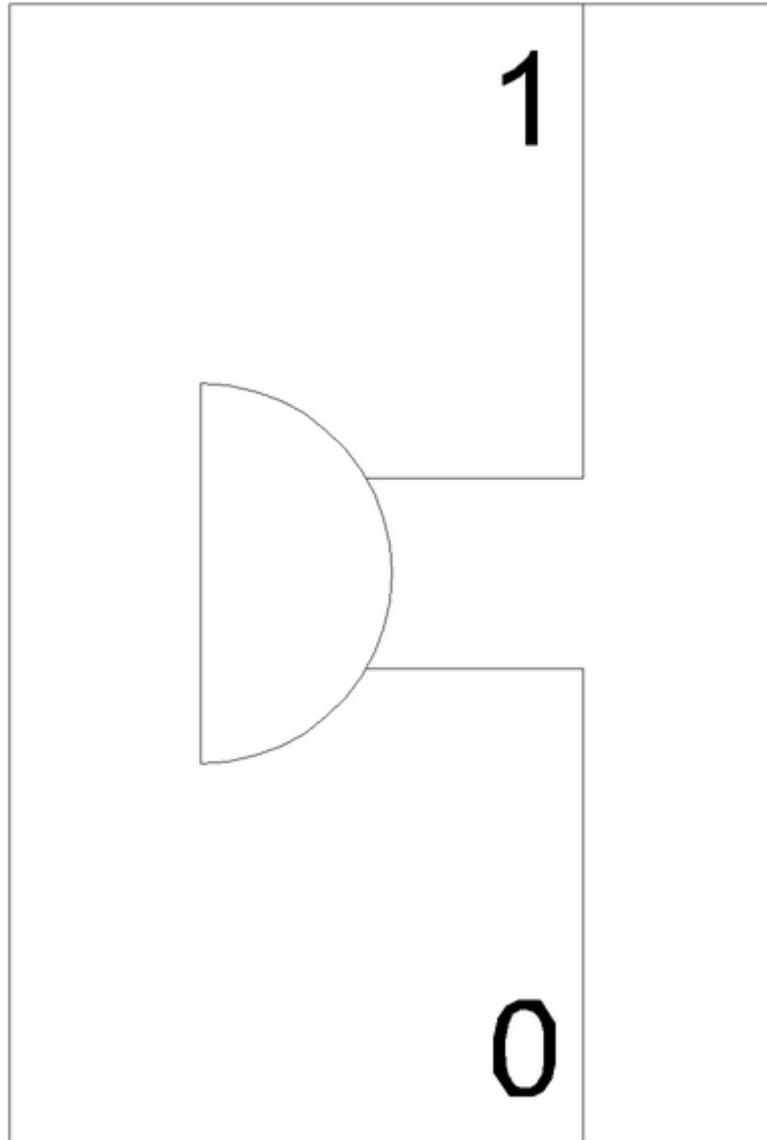

last modified:

12/23/2020 