

Figure similar

MLFB-Ordering data

1FK2206-4AF01-0SB0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Basic motor data		Mechanical data	
Motor type	Permanent-magnet synchronous motor, Natural cooling, IP65	Design acc. to Code I	IM B5 (IM V1, IM V3)
Motor type	Compact	Vibration severity grade	Grade A
Static torque	12.00 Nm	Shaft height	63
Static current	7.9 A	Flange size (AB)	125 mm
Maximum torque	36.00 Nm	Centering ring (N)	110 mm
Maximum current	29.5 A	Hole circle (M)	130 mm
Maximum speed	5800 rpm	Screw-on hole (S)	9.0 mm
Rotor moment of inertia	15.100 kgcm <sup>2</sup>	Overall length (LB)	193 mm
Weight	8.9 kg	Diameter of shaft (D)	24 mm
		Length of shaft (E)	50 mm
		Length of flange diagonal (P)	158 mm
		Shaft extension	Plain shaft

### Rated data

SINAMICS S120, BLM/SLM 3AC 400V

Rated speed	3000 rpm
Rated torque	9.10 Nm
Rated current	6.2 A
Rated power	2.85 kW

### Encoder system

Encoder system	Encoder AS22DQC: Absolute encoder single turn 22 bit
----------------	--

### Motor connection

Connection type	Double cable connection for S120
Connector size	M23

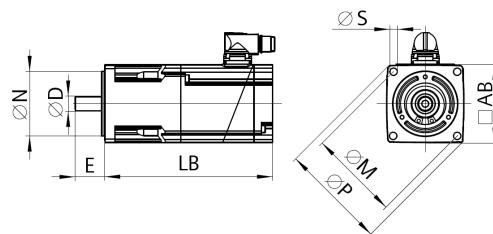


Figure similar