

SIMATIC NET, IE/AS-i Link PN IO Gateway IE/AS-i with master profile M3, M4 according to AS-i specification V3.0 for integration in PROFINET IO Single master with display IP20

General technical data:		
Product designation		PROFINET IO/AS-Interface Link
Product type designation		IE/AS-i LINK PN IO (single master)
Protection class IP		IP20
Type of electrical connection of the AS-interface		Screw-type connection
Type of voltage supply		via AS-i or 24 V DC
Operating condition separate power supply 24 V		No
Supply voltage from optional external supply voltage at DC	V	24
Consumed current		
• from profile conductors of the AS-interface		
— at 30 V maximum	mA	320
— at 24 V with AS-i Power24V maximum	mA	320
Power loss [W]	W	9.6
Insulation voltage rated value	V	500
Product function suitable for AS-i Power24V		No
• Note		from product status 4 / firmware V2.2
Product feature redundancy capability		No
Product function		
• web-based management		Yes
• Diagnostics via email		Yes
• Galvanic isolation		Yes
Display version		
• as status display by LED		SF, BF, ON, APF, CER, AUP, CM
• as status indication through display		LCD display, full graphic, backlighting, 128 x 64 pixels
Type of configuration of the AS-interface		Operator display, integrated web server, STEP7, GSD, command interface
Communication/ Protocol:		
Version of the AS-interface specification		V 3.0
AS-interface master profile is supported		M4 (in acc. with AS-interface specification V 3.0)
Type of data transmission		PROFINET
Number of interfaces		
• as AS-interface		1

<ul style="list-style-type: none"> • acc. to RS 485 • acc. to Industrial Ethernet • acc. to PROFINET • acc. to wireless • acc. to USB • other 		0 2 2 0 0 1
Product component optical interface		No
Protocol is supported		
<ul style="list-style-type: none"> • ASIsafe (Safety at work) protocol • PROFIsafe protocol • PROFIBUS protocol • PROFINET IO protocol • PROFINET CBA protocol • TCP/IP • SNMP 		No No No Yes No Yes Yes
Standard for wireless communication IEEE 802.11		No

Inputs/ Outputs:

Number of inputs for AS Interface maximum		496
Number of outputs for AS Interface maximum		496
Number of AS-i slaves per AS-Interface maximum		62
Bus cycle time of the AS-interface		
<ul style="list-style-type: none"> • for 31 slaves • for 62 slaves 	ms ms	5 10
Access to digital I/O data		via process image/peripheral addresses
Access to analog I/O data		via process diagram/peripheral addresses and data record transfer

Mechanical data:

Width	mm	90
Height	mm	132
Depth	mm	88.5
Mounting type		snap-on fastening on 35 mm standard rail
Module format		IP20

Ambient conditions:

Ambient temperature		
<ul style="list-style-type: none"> • if installed on horizontal mounting rail • during transport • during storage 	°C °C °C	0 ... 60 -30 ... +70 -30 ... +70
Relative humidity at 25 °C during operation maximum	%	95
Installation altitude at height above sea level maximum	m	3 000

Safety related data:

Suitability for use safety-related function		No
Explosion protection marking for intrinsic safety of related equipment		No
• EEx ia		No
• EEx ib		No
Explosion protection category for gas		none
Explosion protection category for dust		none

Certificates/ approvals:

General Product Approval	EMC	For use in hazardous locations	Declaration of Conformity
--------------------------	-----	--------------------------------	---------------------------

[FM](#)



Declaration of Conformity	Shipping Approval	other
---------------------------	-------------------	-------

[Miscellaneous](#)



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=6GK1411-2AB10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/6GK1411-2AB10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=6GK1411-2AB10&lang=en

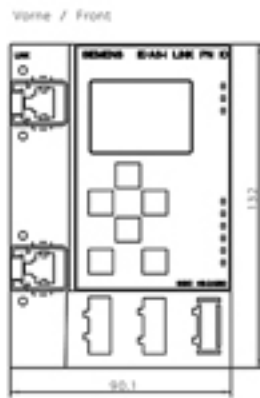

last modified:

07/25/2019